XCA1600 全地面起重机 / All Terrain Crane

技术规格书
Technical specifications


max 1600t　92.4m　m 155m




目录
Contents

尺寸参数 Dimensions		3-5
技术规格 Technical specifications		6-11
重量 Weight		12
作业速度 Working speeds		13
平衡重 Counterweight		14
运输部件尺寸 Dimensions of parts to be transported		15-20
臂架组合方案 Boom / Jib combinations		21-24
起重性能表 Lifting capacities	超起风电臂 Super lifting device + wind power jib	25-36
	超起主臂 Super lifting device + boom	37-46
	主臂 Boom	47-59
	超起变幅副臂 Super lifting device + luffing jib	60-84
主要技术参数 Table of main technical parameters		85-86
符号标识 Description of symbols		87
注意事项 Notes		88

尺寸参数
Dimensions

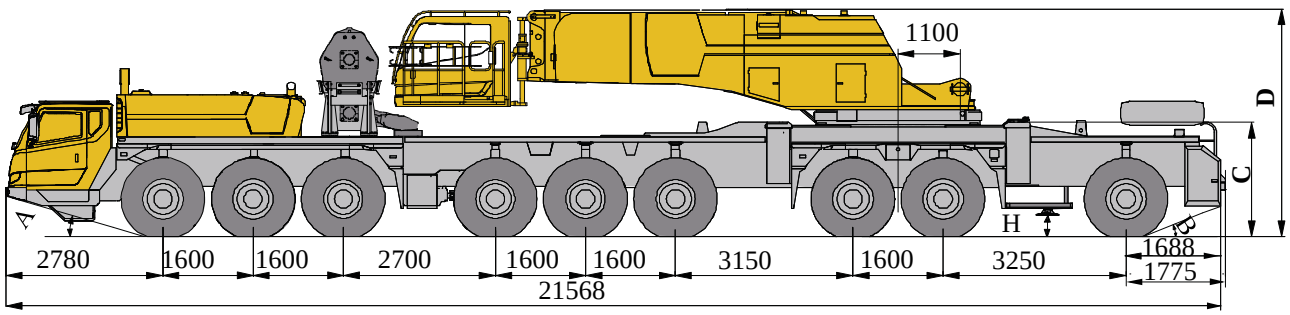


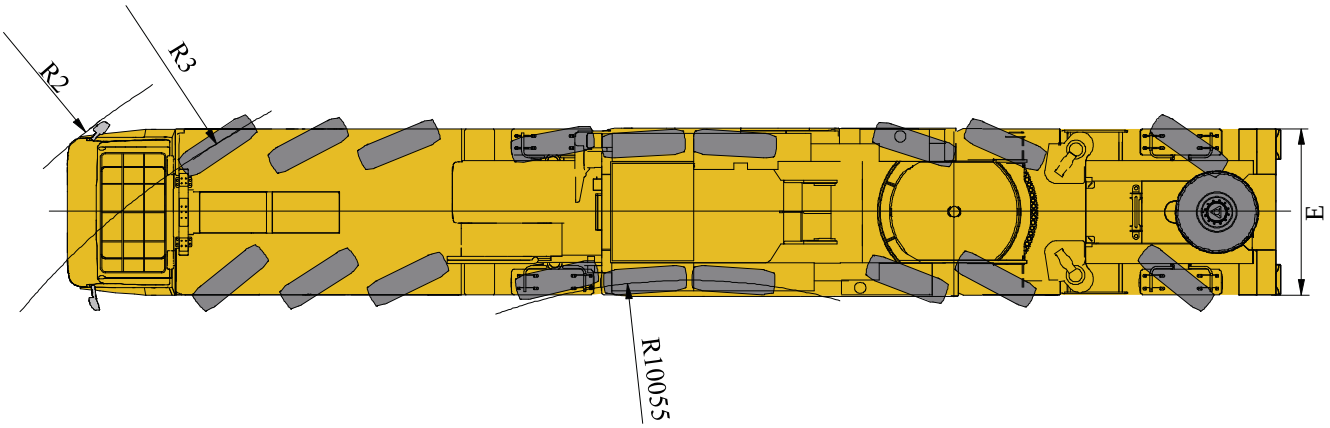


	A	B	C	D	E	R2	R3	H
385/95 R 25 (14.00 R 25)	12.5°	16°	1981	3950	3000	16700	15000	219
445/95 R 25 (16.00 R 25)	14°	17°	2031	4000	3000	16700	15000	269
525/80 R 25 (20.5 R 25)	14°	17°	2031	4000	3100	16700	15000	269

*该状态为悬挂最低位状态，悬挂可提升300mm
Suspensions at lowest position, raising of 300 mm is possible.

尺寸参数
Dimensions

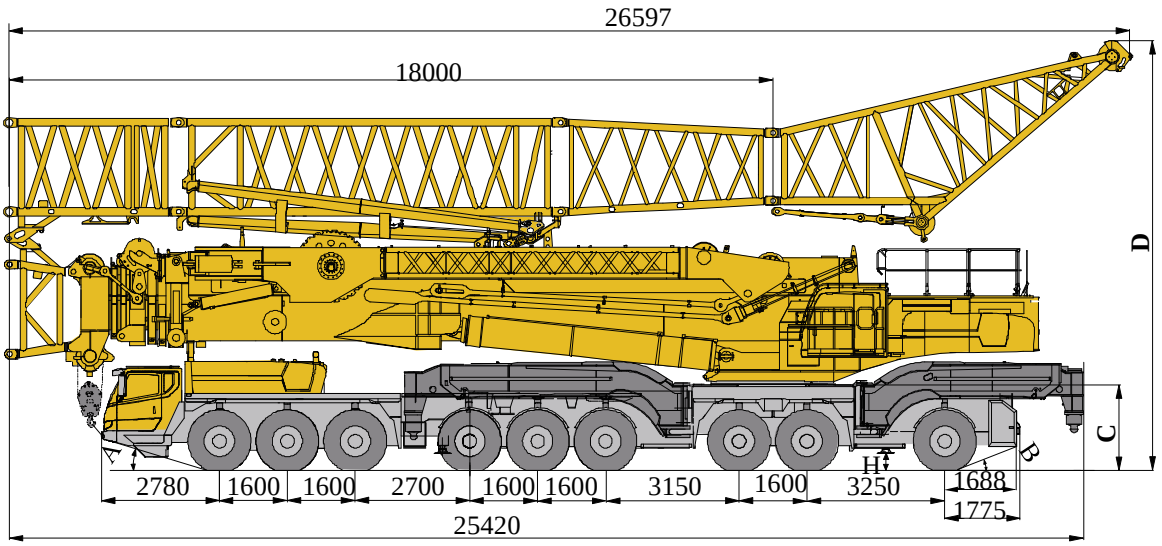


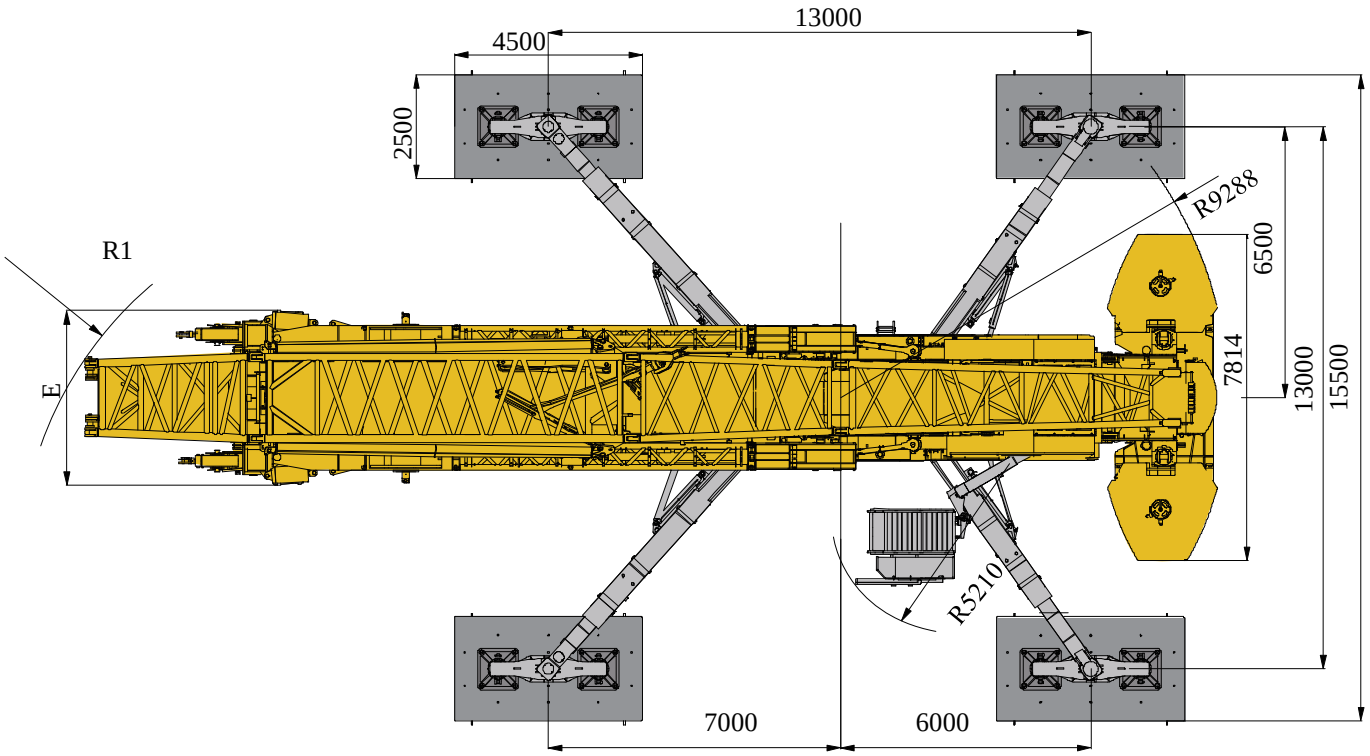


	A	B	C	D	E	R1	H*
385/95 R 25 (14.00 R 25)	12.5°	16°	1981	10070	4190	17980	369
445/95 R 25 (16.00 R 25)	14°	17°	2031	10120	4190	17980	419
525/80 R 25 (20.5 R 25)	14°	17°	2031	10120	4190	17980	419

*中位状态，悬架可升降150mm
Suspensions at middle position, raising or lowering of 150 mm is possible.

尺寸参数
Dimensions

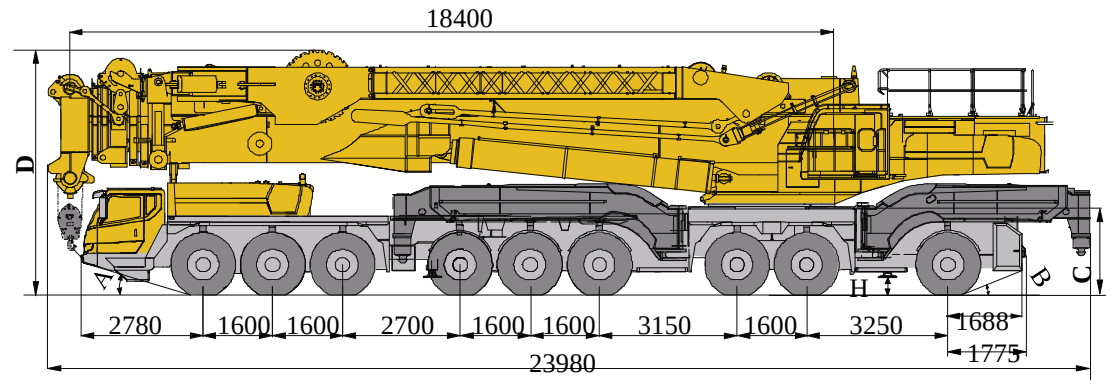

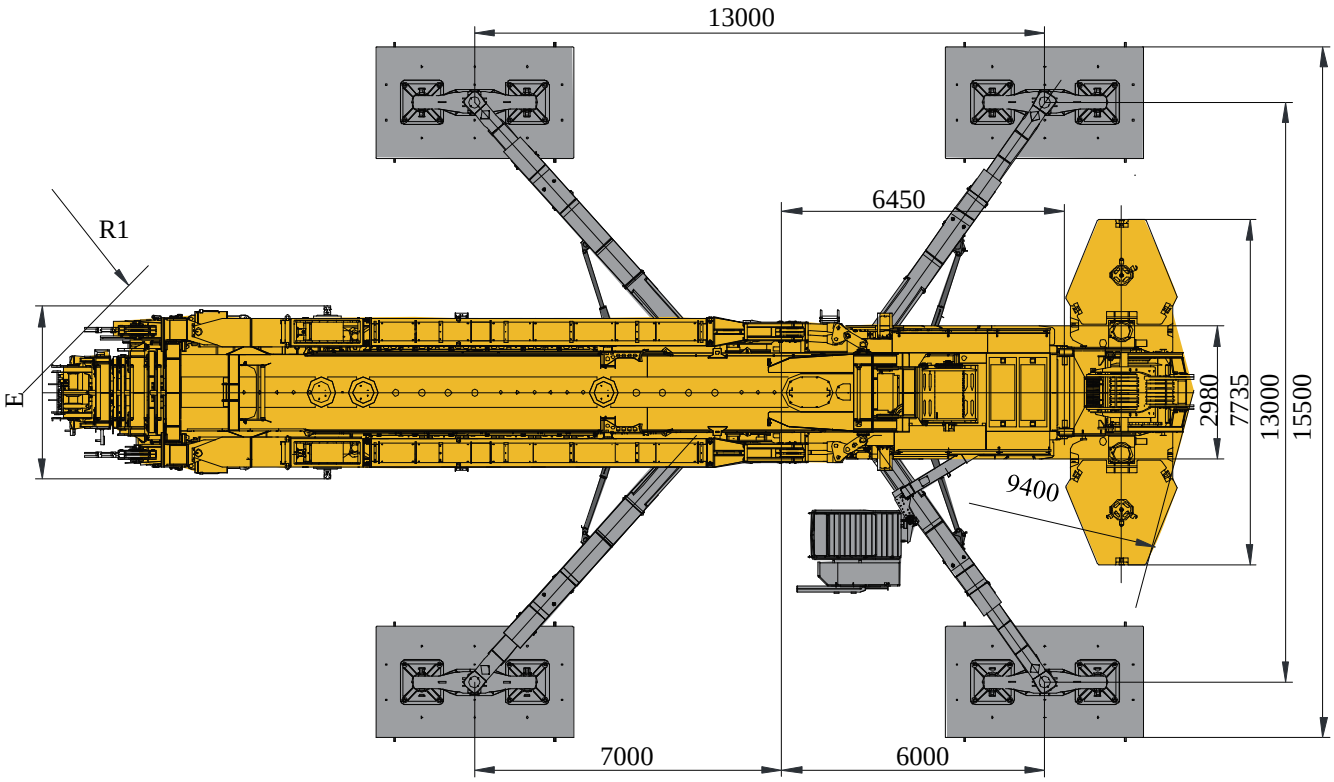

	A	B	C	D	E	R1	H*
385/95 R 25 (14.00 R 25)	15.5°	19°	1981	5605	4040	16950	369
445/95 R 25 (16.00 R 25)	17°	20°	2031	5655	4040	16950	419
525/80 R 25 (20.5 R 25)	17°	20°	2031	5655	4040	16950	419

*中位状态，悬架可升降150mm
Height with * followed is the value while suspensions are partially elevated.

技术规格
Technical specifications

 底盘		配置
车架	徐工设计、制造，高强度钢材制造，具有可拆卸功能的箱型支腿结构。	●
支腿	4支腿，X形布置，采用双级水平支腿，侧摆、水平伸缩和垂直伸缩由液压控制。支腿油缸均设有单向阀，且垂直支腿带有双向液压锁；同时具有四个辅助支腿，用于车辆维修；底盘两侧装有电控操纵控制台，控制台板装有夜光水平仪、照明灯和增速按钮。	●
发动机	OM502LA.E3B/1，V形八缸水冷电控柴油发动机，戴姆勒制造，额定功率480kw /1800rpm，最大扭矩3000N.m /1300rpm，国V排放标准。 燃油箱容积：600L。	●
液压系统	散热油泵通过传动轴与发动机前取力口相连，转向、悬挂、支腿公用一柱塞变量泵，与发动机后取力口相连。	●
变速箱	德国ZF原装进口电控变速箱，手动MT和自动AT操纵、带变矩器、缓速制动，12个前进档，2个倒档。	●
车桥	德国KESSLER高强度车桥，配备气控盘式制动器。八桥驱动（两桥液压驱动）：18×16×18。	●
悬挂	所有车桥均采用油气悬挂系统，减震效果好，具有自动调平、悬架升降、弹性刚性转换等功能。 悬架油缸行程：-130mm～+170mm。	●
轮胎	进口高承载米其林轮胎。 轮胎规格：445/95R25（16.00R25） 385/95 R25（14.00R25） 525/80 R25（20.5 R 25）	● ○ ○
制动	行车制动：双回路气压制动，作用于所有车轮。 驻车制动：弹簧贮能制动，作用于2-7及9轴车轮。 辅助制动：发动机制动，变速箱缓速制动。	●
驾驶室	新型钢结构豪华全宽驾驶室，采用悬浮式连接结构，后部装有减震器。配备电动升降器的安全玻璃、可调式座椅、电动调节后视镜、可调节高度及角度方向盘，倒车显示器、大屏幕彩色液晶显示器等。新型组合式中控台布局安全合理，采用圆弧造型，体现人性化的设计。 标配CD音响、冷暖空调。	●
电气系统	直流24伏特，2个12伏电池组串联。	●



上车		配置
结构	徐工设计、制造，高强度钢材制造	●
液压系统	电比例变量泵用于起升、回转，闭式泵用于变幅、伸缩；主阀通过插装阀芯的逻辑控制，实现伸缩、变幅等动作；大功率风冷式液压油冷却器，有效降低系统油温。	●
操纵方式	先导电液比例操纵，无级调速，由左右2个操纵手柄控制起重机的全部动作。	●
主起升机构	由液压马达驱动，内置行星齿轮减速器和常闭式制动器。专用防乱绳卷筒，抗缠绕钢丝绳。	●
发动机	OM460LA.E3A/4，直列六缸、水冷却、增压中冷、柴油发动机，戴姆勒制造，额定功率295kw /1800rpm，最大扭矩1900N.m /1300rpm，国III排放标准。 燃油箱容积：415L。	●
回转机构	三排滚柱外齿式回转支承，双回转机构，由液压马达驱动，内置行星齿轮减速器和常闭式制动器，可连续回转360°，具有动力控制或自由回转的功能，可无级调速。	●
操纵室	按人机工程学设计，安全舒适，装有安全玻璃和顶部保护栏；前窗及上窗装有遮阳板推拉式车门，配有带防护栏杆的走台板，方便上下操作室；通过摆臂安装在转台上，可围绕转台上的摆臂安装点前后及上下旋转，方便人员出入，并能绕后铰点向后旋转，扩大视野。	●
安全装置	液压平衡阀、液压溢流阀、液压双向锁、力矩限制器；三圈保护器，防止钢丝绳过放；臂头设置高度限位，防止钢丝绳过卷；风速仪，检测高空风速。	●
电气系统	直流24伏特，2个12伏电池组串联。	●
力矩限制器	当实际力矩接近过载时，发出听视觉警报，并在过载之前自动停止危险动作。具有超载记忆功能（黑匣子）和故障自诊断功能。	●
组合配重	总重235t，有0t、35t、55t、75t、95t、115t、135t、155t、175t、195t、215t，235t，12种组合方式。	平衡重A ● 平衡重B ● 平衡重C ●
吊钩	360t钩	○
	200t钩	●
	130t钩	●

	臂架系统	配置
主臂	7节，“U”形截面的筒形焊接结构。采用2缸销伸缩油缸，新型缸销同步驱动机构确保双缸销同步性，单缸插销伸缩系统更加安全可靠，有46%、92%和全伸模式可供选择。主臂长度：18.4m～92.4m。	●
超起	Y型，安装在基本臂端部，4倍率超起钢丝绳设计。	●
风电臂	风电臂：27.5m、39.5m和51.5m， 其中27.5m可自动折叠。	○
变幅副臂	桁架式焊接结构，具有70°、78°、86°三种主臂仰角。 变幅副臂：18m～102m	安装组件 ○ 12m加长节 ○ 过渡节总成 ○ 6m加长节 ○ 臂头 ○
变副卷扬机构	包括变幅滑轮组，用于变幅副臂的变幅。	○

产品各部件明细如上所述，具体部件明细请参照产品报价单
符号说明：
● —— 表示标准配置；
○ —— 表示选装配置。

技术规格
Technical specifications

 Chassis		Configuration
Frame	Designed and manufactured by XCMG, made of high strength steel with inverted trapezoid cross section.	●
Outriggers	4 outriggers are arranged in X shape. The 2-stage outrigger beams are adopted. Side swing, longitudinal and vertical telescoping are hydraulic controlled. Check valve is fitted at each outrigger oil cylinder and each jack is fitted with a double-way hydraulic valve. There are four auxiliary outriggers for vehicle maintenance. There is an electric control panel fitted at each side of the chassis with luminous level gauge, lamp and accelerator buttons.	●
Engine	OM502LA.E3B/1, V-type eight-cylinder water cooled, electric control diesel engine, manufactured by Daimler AG, with rated power of 480 kw / 1800 rpm, and max. torque of 3000 N.m /1300 rpm; compliant with China V emission standard. Fuel tank capacity: 600 L.	●
Hydraulic system	The oil pump for heat dissipation is connected to the PTO port in front of the engine through a transmission shaft, and the variable displacement pump shared for steering, suspensions and outriggers, is connected to the PTO port at the rear of the engine.	●
Transmission	German originally imported ZF electrical-control transmission has MT, AT, torque converter, retarder, 12 forward gears and 2 reverse gears.	●
Axles	High strength axle with reliable performance, imported originally from KESSLER Germany, equipped with pneumatically controlled disc brake. Eight axles for driving: 18×16×18.	●
Suspension	Hydro-pneumatic suspension is adopted for all axles, providing good shock absorbing effect. Functions of automatic leveling, suspension lifting, elastic/rigid state switch-over, etc. are available. The stroke of suspension cylinder is -130 mm ~ +170 mm.	●
Tires	Imported Michelin tire with high bearing capacity. Tire specifications: 445/95R25(16.00R25)	●
	385/95 R25（14.00R25）	○
	525/80 R25（20.5 R 25）	○
Brakes	Service brake: double-circuit air pressure brake, acting on all wheels. Parking brake: spring-loaded brake, acting on wheels of axles 2-7 and 9; Auxiliary brake: engine brake and transmission retarder brake.	●
Driver's cab	Full dimension steel structure luxury cab has suspension connection structure and rear damper. Equipped with adjustable seats, safety glass, electrically operated door window lifter, electric-adjustable mirrors, steering wheel adjustable in height and angle, reverse radar displayer, large screen liquid crystal display, etc. New combined central control panel is reasonably arranged with arc shape adopted, presenting human-oriented design concept. Heater, air conditioner and CD player are standard.	●
Electrical system	DC 24 V, with 2 sets of 12 V batteries in series.	●

 Superstructure		Configuration
Frame	Designed and manufactured by XCMG, made of high-strength steel.	●
Hydraulic system	Electric proportional variable displacement pump is used for lifting and slewing; closed pump is used for elevating and telescoping. Through logic control of plug-in valve spool, main valve is used to control telescoping and elevating operation; large power air-cooled hydraulic oil radiator can effectively reduce the oil temperature.	●
Operating mode	The pilot electric and hydraulic proportional operation system is equipped with two levers at left and right sides controlling the main movements of the crane, and stepless slewing speed regulation is available.	●
Main winch system	Driven by a hydraulic motor, with build-in planetary gear reducer. Specific anti-disorder rope winding drum and anti-coiling wire rope are available.	●

技术规格
Technical specifications

Engine	OM460LA.E3A/4, in-line, 6-cylinder, water cooled, supercharging intercooler, diesel engine, manufactured by Daimler AG, with rated power of 295 kw /1800 rpm, and max. torque of 1900 N.m /1300 rpm; compliant with China III emission standard. Fuel tank capacity: 415 L.	●
Slewing system	Three-point roller external tooth slewing ring with a dual slewing mechanism is driven by hydraulic motor, with built-in planetary gear reducer and constant-closed brake equipped, and may continuously slew 360°. Power control and free slewing function as well as stepless speed regulation are available.	●
Operator's cab	The cab is ergonomically designed. Safety glass for windows, sun visors for windshield and roof window are used. A grid is installed for protecting the roof window. A sliding door and a catwalk with protective handrails are available to make it easy and safe as access and egress the cab. The cab is connected with the turntable through an swing arm, which enables the cab to move leftwards/rightwards and upwards/downwards, facilitating the operator to get on/off the cab. The cab is designed to turn 20° backward to enlarge the operator's field of view.	●
Safety devices	Hydraulic counterbalance valve, hydraulic relief valve, hydraulic double-way valve and LMI are available. Lowering limiter is equipped in winch to prevent rope over-releasing. Anti-two block is fitted on the boom head to prevent rope over-winding. Anemometer is equipped to check whether aerial wind velocity is in safe working range.	●
Electrical system	DC 24 V, with 2 sets of 12 V batteries in series.	
LMI	When the actual load moment is approaching overloading value, audible and visual warning will be sent out, and the dangerous operation will be automatically stopped ahead of overloading. Overload memory function (black box) and fault self-diagnosis function are available.	●
		●

Combined counterweight	Total weight is235 t, 12 counterweight combinations of 0 t, 35 t, 55 t, 75 t, 95 t, 115 t, 135 t, 155 t, 175 t ,195 t ,215t and235t are available.	counterweight A	●
		counterweight B	●
		counterweight C	●
Hook	360t Hook		○
	200t Hook		●
	130t Hook		●

Product parts list is as mentioned above. Please refer to the product quotation for specific parts

● ——**Standard**

○ ——**Optional**

	Boom system		Configuration
Boom	7-section boom with U cross-section, welding structure. 2-cylinder pin telescoping cylinder is available. A new type cylinder pin synchronizer driving system is adopted to guarantee the synchrony of the two cylinder pins. The single cylinder pinning telescoping system is safer and more reliable. 46%, 92% and fully-extended telescoping modes can be realized. Boom length: 18.4 m ~ 92.4 m.		●
Super lifting device	Y-shaped, installed at top of base boom, with wire rope with four parts of line available.		●
Wind power jib	Wind power jib of 27.5 m, 39.5 m and 51.5 m Among them, 27.5 m can realize self-folding.		○
Luffing jib	Lattice jib, welded structure; three boom angles of 70°, 78°, 86°. Luffing jib: 18 m ~ 102 m.	Fixing subassembly	○
		12m Increase Section	○
		Transition section	○
		6m Increase Section	○
		End section	○
Winch system for luffing jib	It mainly consists of the elevating sheave block and is used for the elevating of the luffing jib.		○

Product parts list is as mentioned above. Please refer to the product quotation for specific parts

● ——**Standard**

○ ——**Optional**

重量
Weight



	1	2	3	4	5	6	7	8	9	总重量 Total weight
t	8	8	8	8	12	12	12	12	12	92t(1)
t	17.7	17.7	17.7	17.7	25	25	25	25	25	196(2)
t	23.8	23.8	23.8	23.8	29.3	29.3	29.3	29.3	29.3	242t(3)
t	29.5	29.5	29.5	29.5	30	30	30	30	30	268t(4)

(1)92t：上车不带起重吊钩、起重臂、超起装置、变幅缸、伸缩缸、风电臂、变幅副臂、平衡重、平衡重固定装置、吊臂附件、安装与运输附件、随机备件；下车拆除全部活动支腿、配重支架、携带吊钩

Configuration of 92 t: boom, super lifting device, elevating cylinder, telescoping cylinder, wind power jib, luffing jib, counterweight, counterweight fixture, boom accessories, installation and transportation accessories and supplied spare parts are not on board; all outriggers and counterweight support are removed, hook block is secured on the frame.

(2)196t：92t状态+ 起重臂（含变幅缸和伸缩缸）、前支腿；下车拆除吊钩

Configuration of 196 t: 92 t basic configuration without hook block + boom (include elevating cylinder and telescoping cylinder), front outriggers.

(3)242t：92t状态+ 起重臂（含变幅缸和伸缩缸）、超起、前支腿、后支腿；下车拆除吊钩

Configuration of 242 t: 92 t basic configuration without hook block +boom (include elevating cylinder and telescoping cylinder), super lifting device, front and rear outriggers.

(4)268t：92t状态+ 起重臂（含变幅缸和伸缩缸）、超起、27.5m风电臂、前支腿、后支腿；下车拆除吊钩

Configuration of 268 t: 92 t basic configuration without hook block +boom (include elevating cylinder and telescoping cylinder), super lifting device, 27.5m wind power jib, front and rear outriggers.



	倍率 Parts of line	吊钩重量 Weight (kg)	吊钩尺寸 Dimensions (mm)	备注 Remarks
360 t	26	5690	1000×1600×2800	双钩 Double hook， 选配 Optional
200 t	14	6000	1000×1100×2200	双钩 Double hook，标配 Standard
130 t	10	4620	900×1000×2000	双钩 Double hook，标配 Standard

作业速度
Working speeds




385/95 R 25（14.00 R 25）	1～80	68%
445/95 R 25（16.00 R 25）	2～80	60%
525/80 R 25（20.5 R 25）	2～80	60%



	作业速度 Working speeds	最大单绳拉力 Max. single line pull	钢丝绳直径/长度 Rope diameter/ length
1	0-125 m/min，单绳，空载，第十层 m/min, single line, 10th layer	184 kN	28 mm/1250 m
	0-0.5 r/min		
	从-0.5°抬起至86°约240s Approx. 240 s for boom elevation from -0.5° to 86°		
	从18.4m伸出至92.4m约3000s Approx. 3000 s for boom extension from 18.4 m to 92.4 m		

平衡重
Counterweight

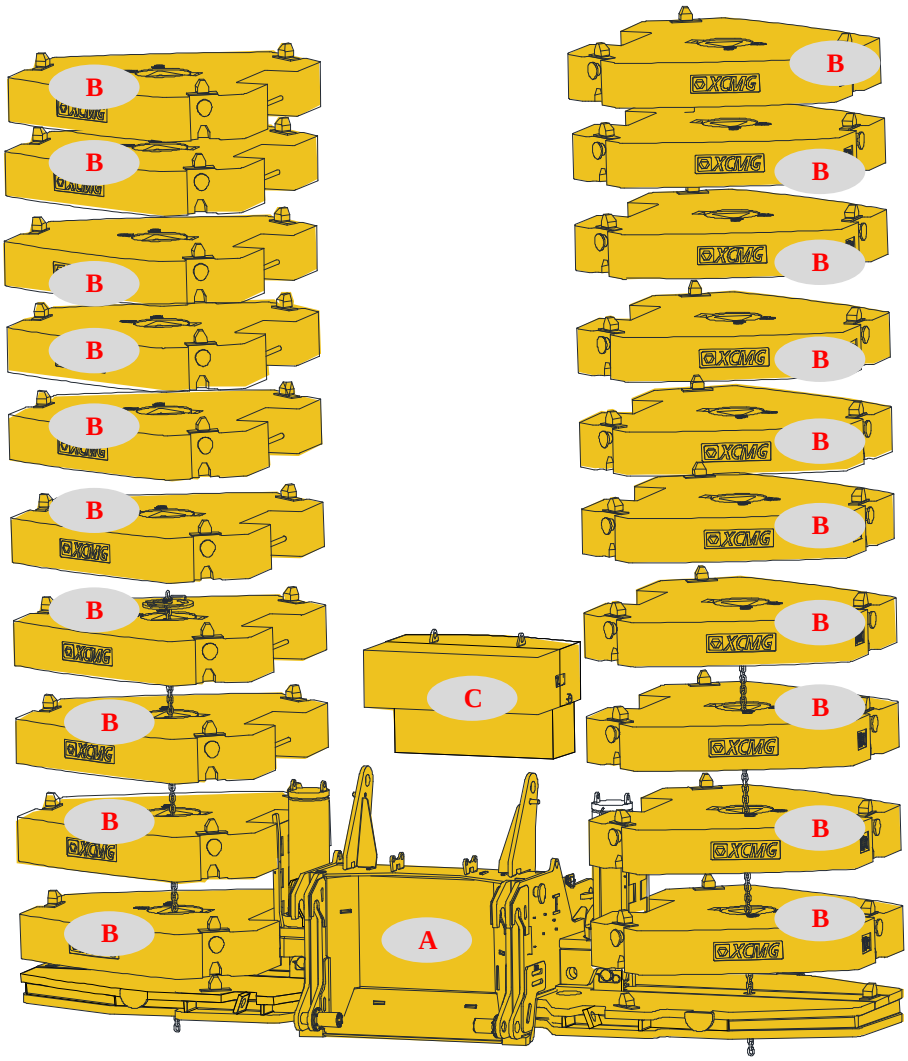


平衡重 Counterweight	A	B	C
尺寸（长×宽×高） m Size（L×W×H） m	7.81×2.62×2.25	2.35×2.55×0.39	1.62×1.2×0.96
重量 t Weight (t)	27.5	10	7.5


工况模式 Working mode	235t	215t	195 t	175 t	155 t	135 t	115 t	95 t	75 t	55 t	35 t
组合形式 Combinations	A+C+B×20	A+C+B×18	A+C+B×16	A+C+B×14	A+C+B×12	A+C+B×10	A+C+B×8	A+C+B×6	A+C+B×4	A+C+B×2	A+C

运输部件尺寸
Dimensions of parts to be transported


基本臂、伸缩缸、多级缸　33.6 t
Base boom, telescoping cylinder and multi-stage cylinder

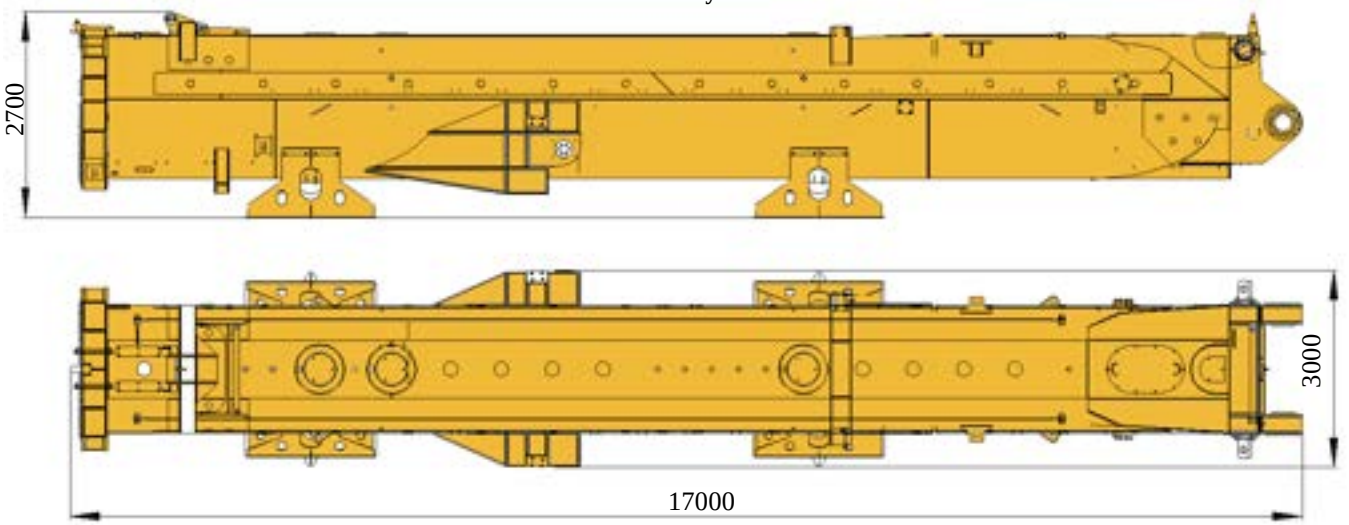

2、3、4节臂　31 t
2nd to 4th boom sections

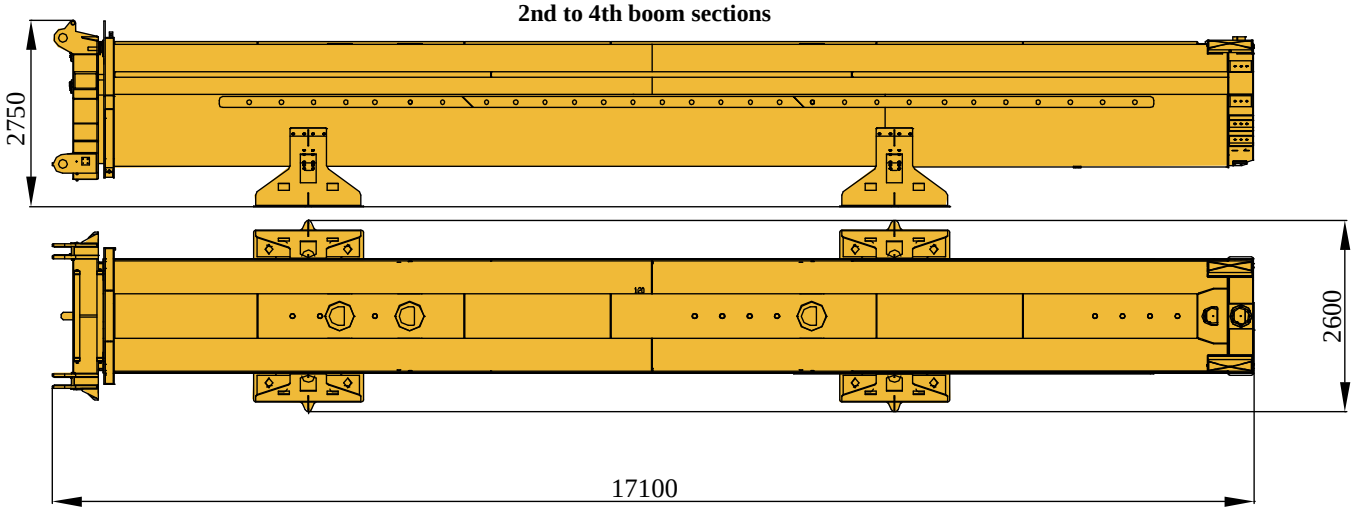


5-7节臂　27.8 t
5th to 7th boom sections

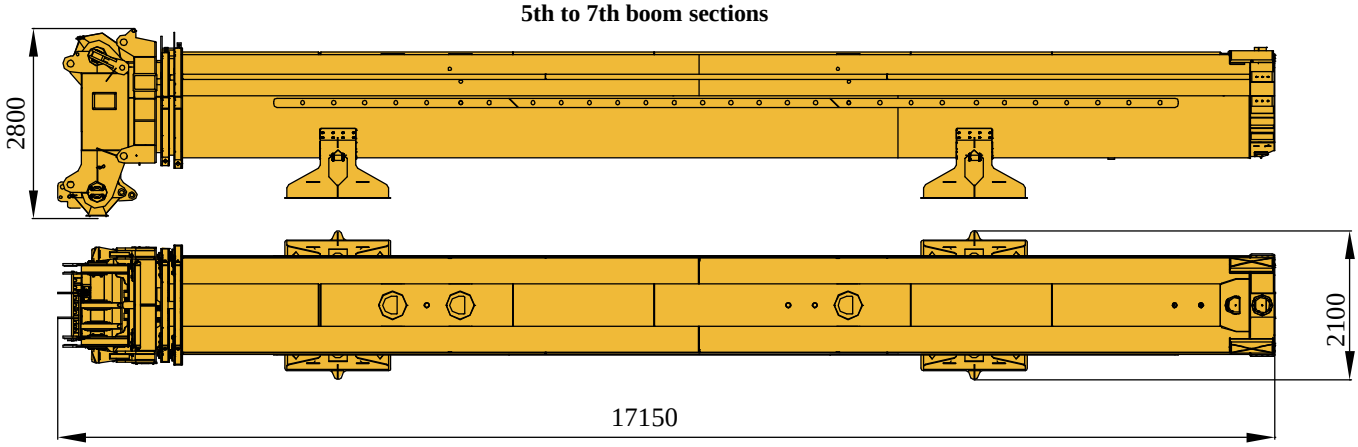


运输部件尺寸
Dimensions of parts to be transported


变幅缸 7 t
Elevating cylinder

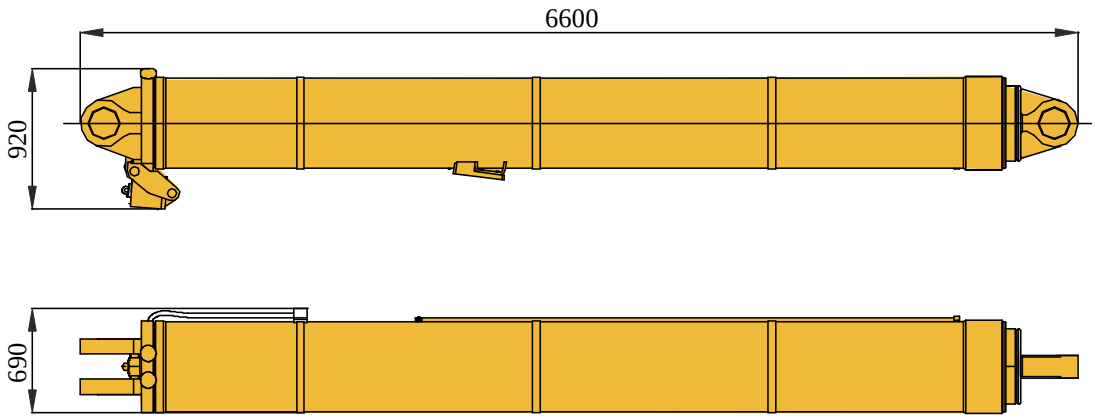


超起装置 34 t
Super lifting device

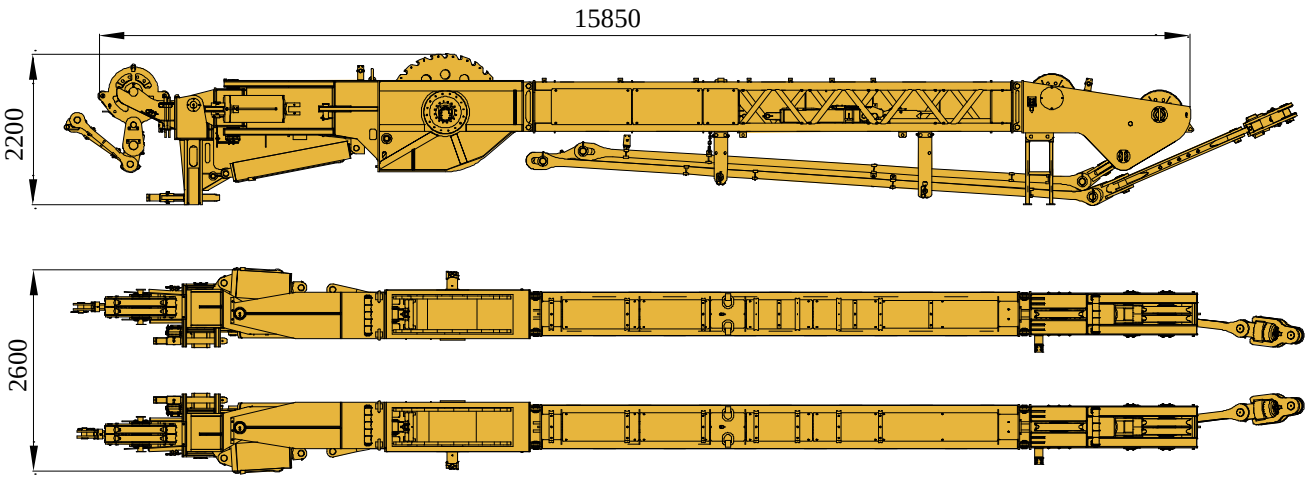

后支腿 7.3 t
Rear outrigger

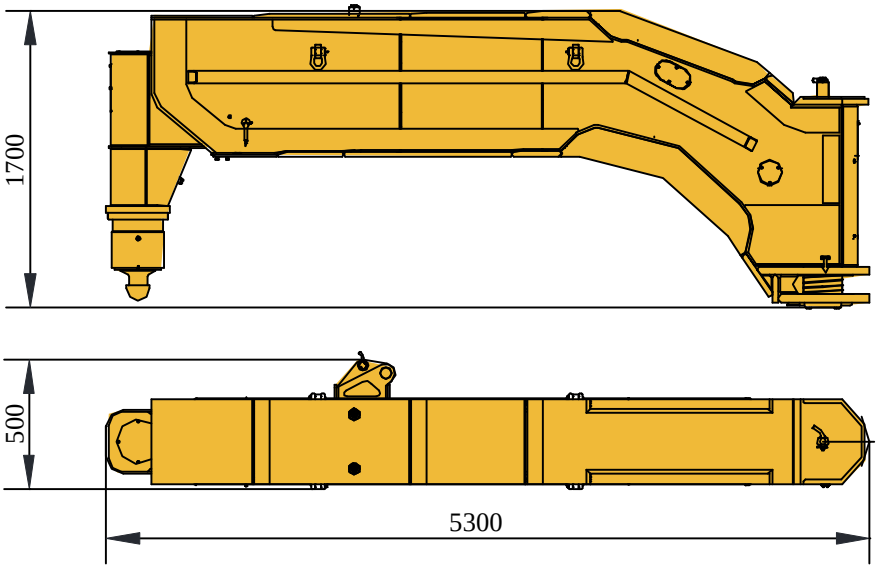


支脚盘 0.28 t
Outrigger float

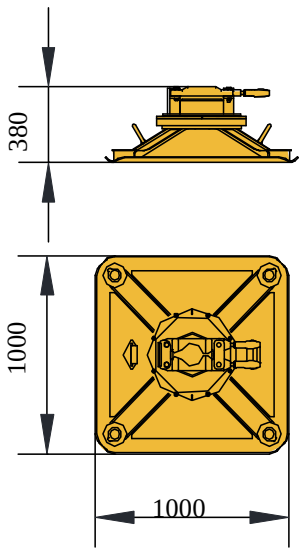


运输部件尺寸
Dimensions of parts to be transported


前支腿 7.8 t
Front outrigger

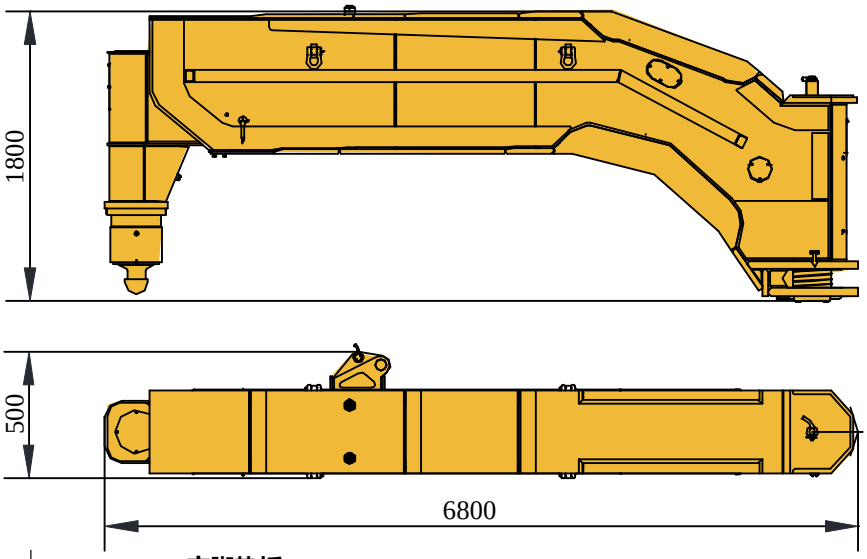


支脚垫板 4 t
Outrigger pad

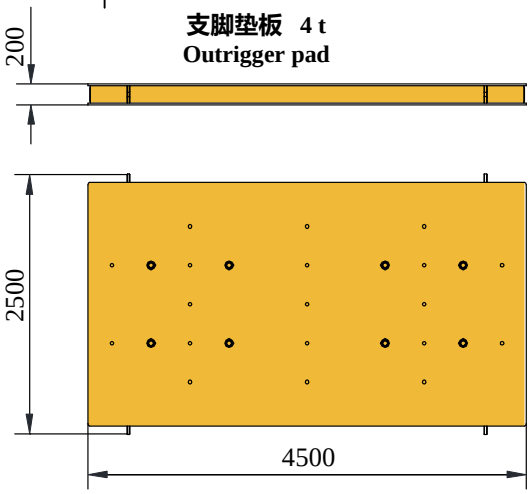


并联支架 0.75 t
Support for parallel outrigger floats

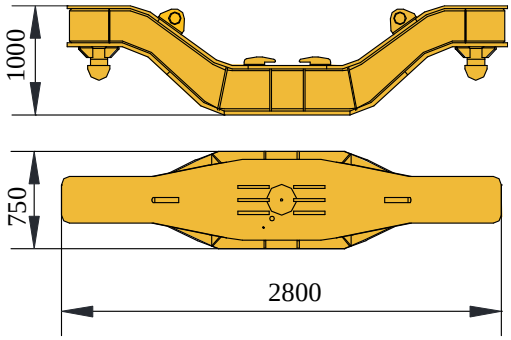

配重支架 1.7 t
Counterweight support

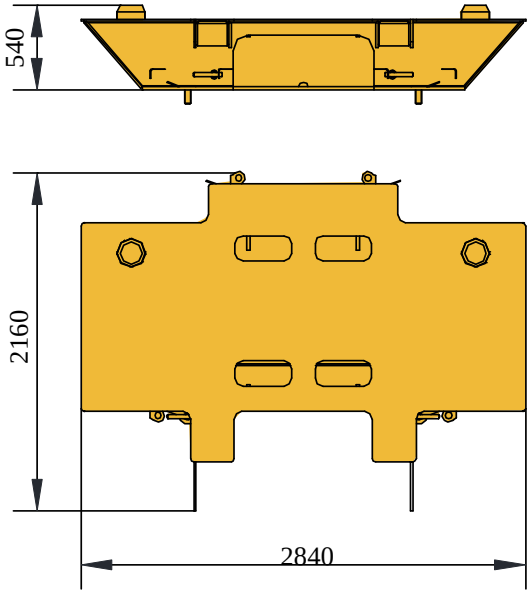


连接架、加长节 5.4 t
Connecting bracket and extension

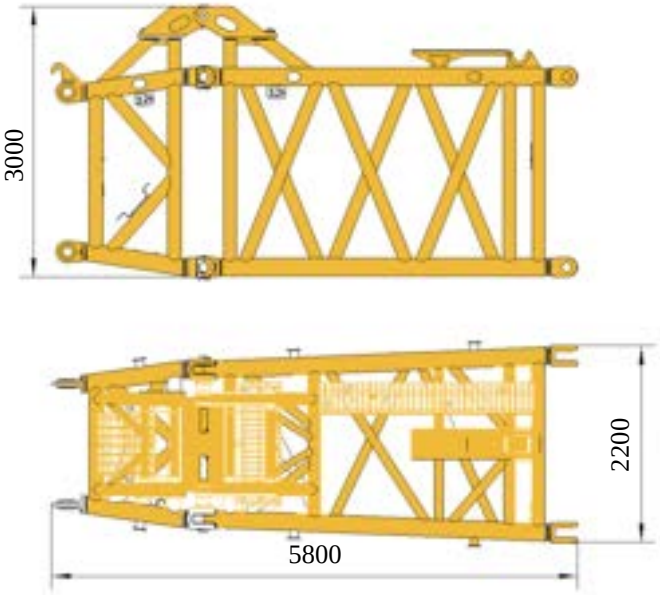


运输部件尺寸
Dimensions of parts to be transported


平衡重底座 35 t
Counterweight base

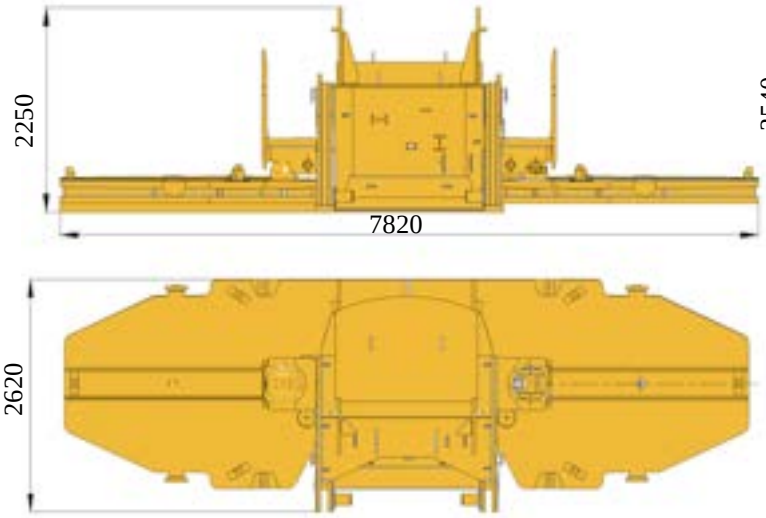


风电臂头 5.4 t
Wind power jib head

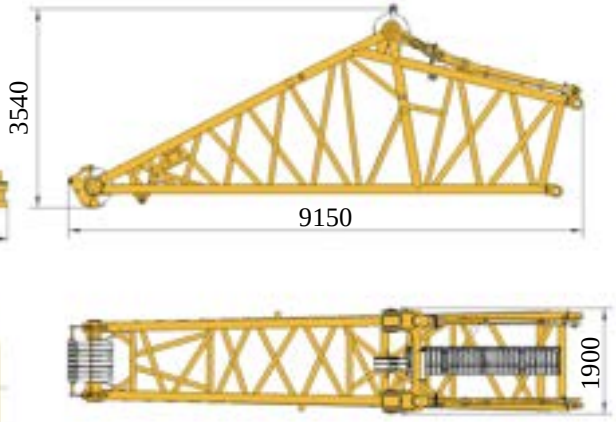


过渡节 2.2 t
Transition section

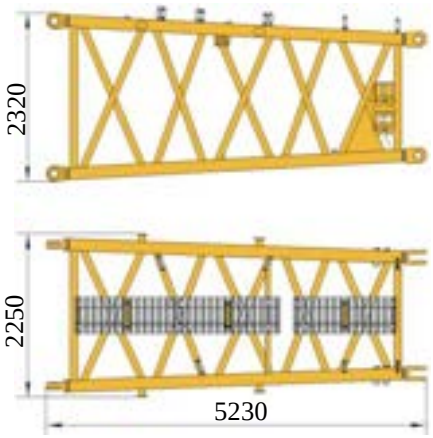

翼式连接架 11.6 t
Wing bracket

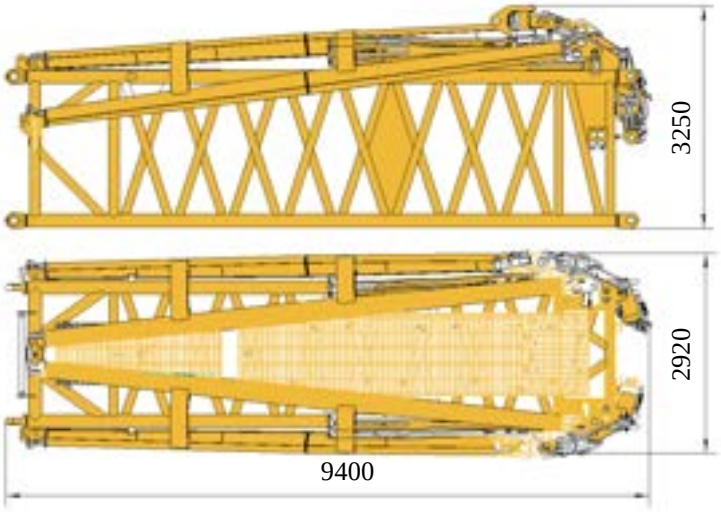


大小加长节 4.7/4.3 t
Inserts

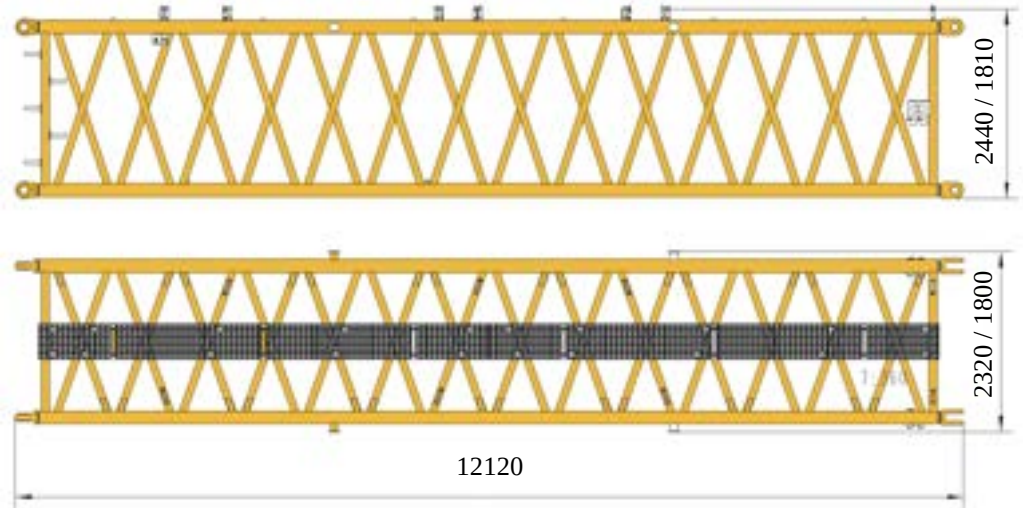


运输部件尺寸
Dimensions of parts to be transported


6m加长节　2个组合总重 6.7 t
6m Increase Section

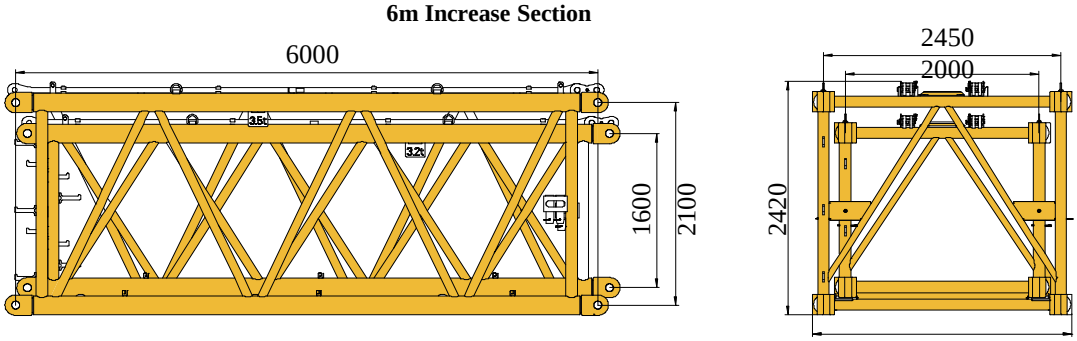

12m加长节　2个组合总重 12.3 t
12m Increase Section

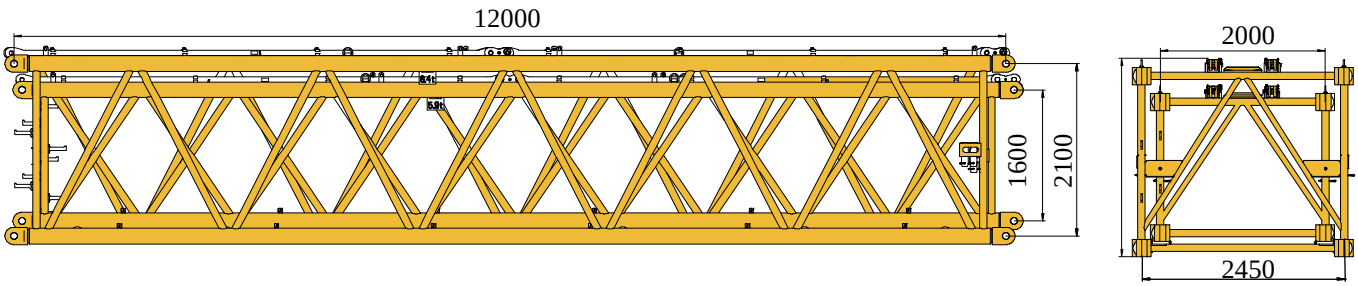


变幅卷扬　12.15 t
Luffing mechanism

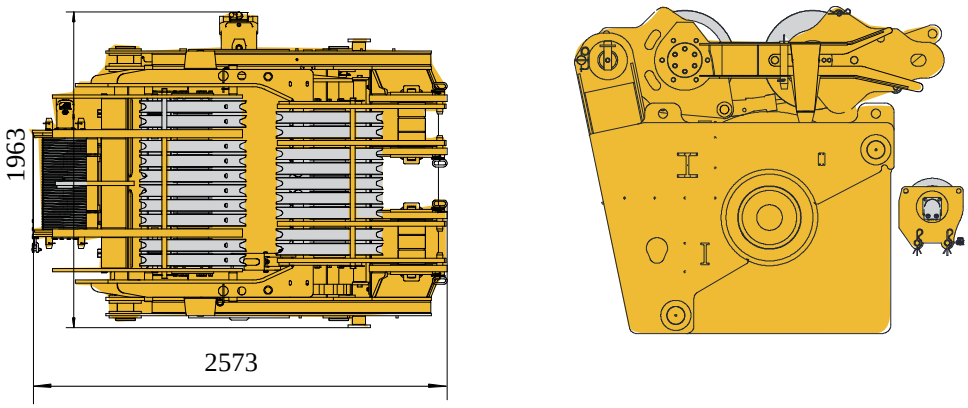


运输部件尺寸
Dimensions of parts to be transported

安装组件　22.1 t
Installation component

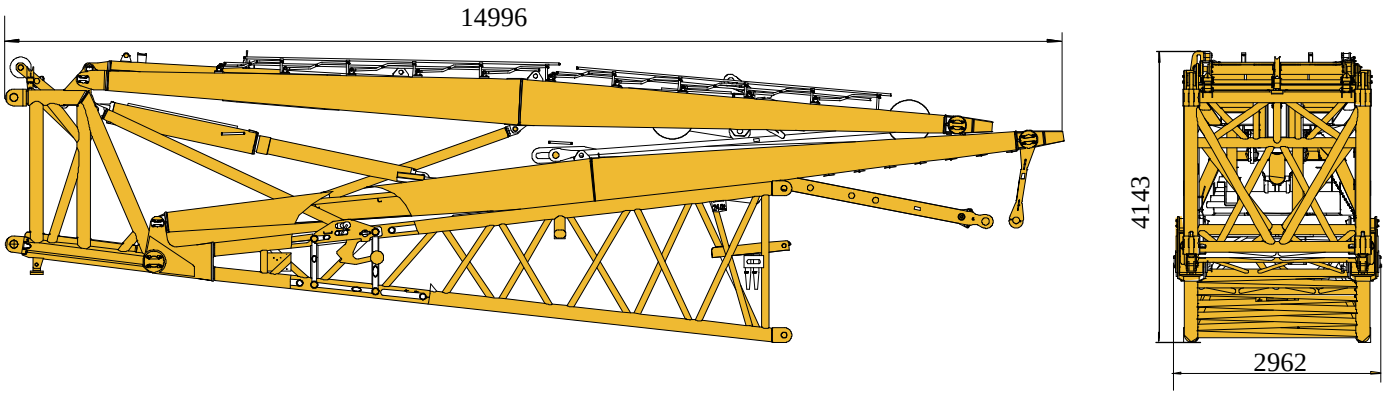


臂头　2.7 t
End section

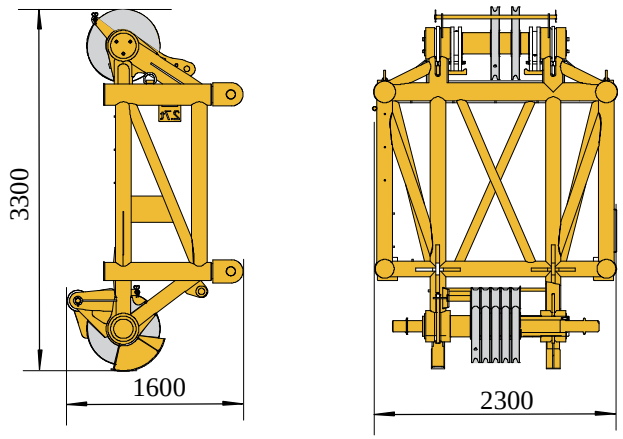


臂架组合方案
Boom / Jib combinations


风电臂– 27.5m
W– 27.5m




风电臂– 39.5m
W– 39.5m




风电臂– 51.5m
W– 51.5m




变幅副臂 - 48m
N – 48m



变幅副臂 - 54m
N – 54m




变幅副臂 - 60m
N – 60m




变幅副臂 - 66m
N – 66m



变幅副臂 - 72m
N – 72m




变幅副臂 - 78m
N – 78m



变幅副臂 - 84m
N – 84m




变幅副臂 - 90m
N – 90m







变幅副臂 - 96m
N – 96m




变幅副臂 - 102m
N – 102m





臂架组合方案
Boom / Jib combinations

部件 Component	结构形式 Structure	尺寸（长×宽×高）mm Size（L×W×H）mm	重量 kg Weight kg
风电臂头 Wind power jib head		9150×1900×3540	5400
连接架总成 Join Frame assembly		5800×2200×3000	5400
加长节总成 I Increase Section assembly I		12120×2320×2440	4700
加长节总成 II Increase Section assembly II		12120×1800×1810	4300
翼型连接架 Wing bracket		9400×2900×3250	11600
安装组件 Fixing subassembly		14996×2962×4143	22146
过渡节总成 Transition section		2000×2450×2100/ 5230×2250×2320	1883/2200
6m加长节 6m Increase Section		6000×2000×1600/ 6000×2450×2100	3200/3500
12m加长节 12m Increase Section		12000×2000×1600/ 12000×2450×2100	5900/6400
臂头 End section		1600×2300×3300	2700

臂架组合方案
Boom / Jib combinations

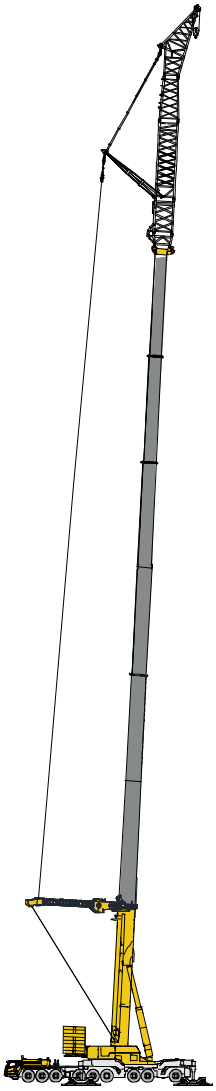


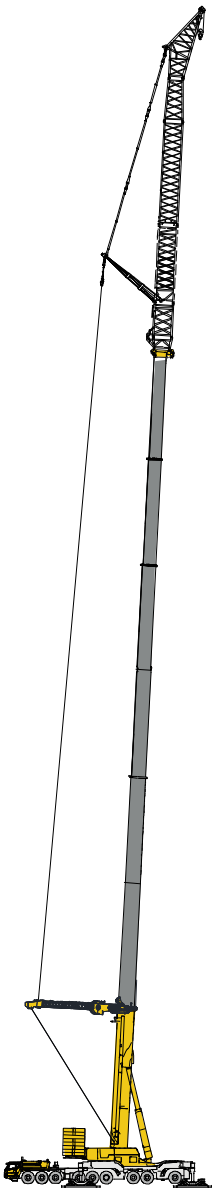


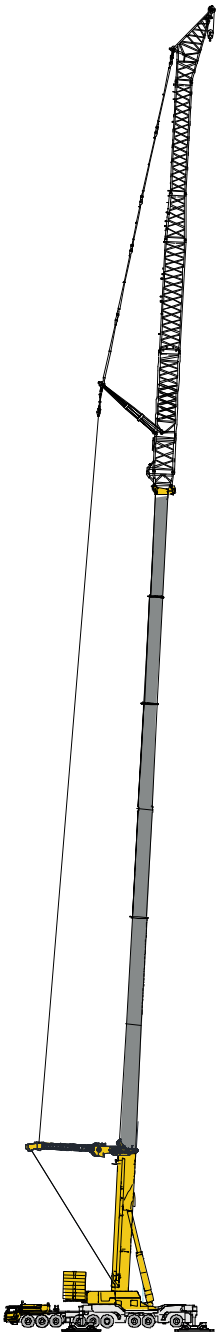


超起风电臂 Super lifting device + wind power jib	超起风电臂 Super lifting device + wind power jib	超起风电臂 Super lifting device + wind power jib
T:63.8~86.5 m W:27.5 m	T:63.8~86.5 m W:39.5 m	T:63.8~86.5 m W:51.5 m


臂架组合方案
Boom / Jib combinations

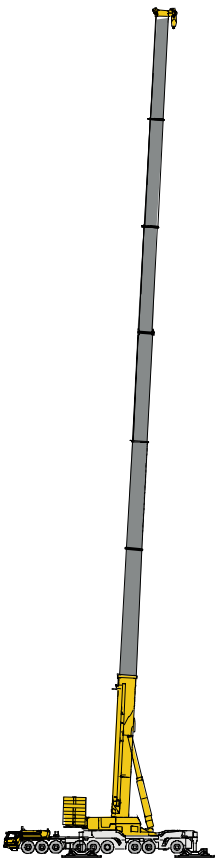

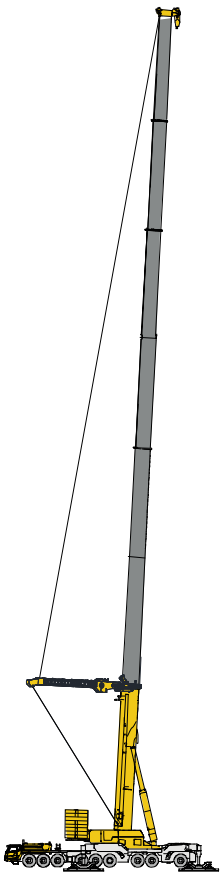

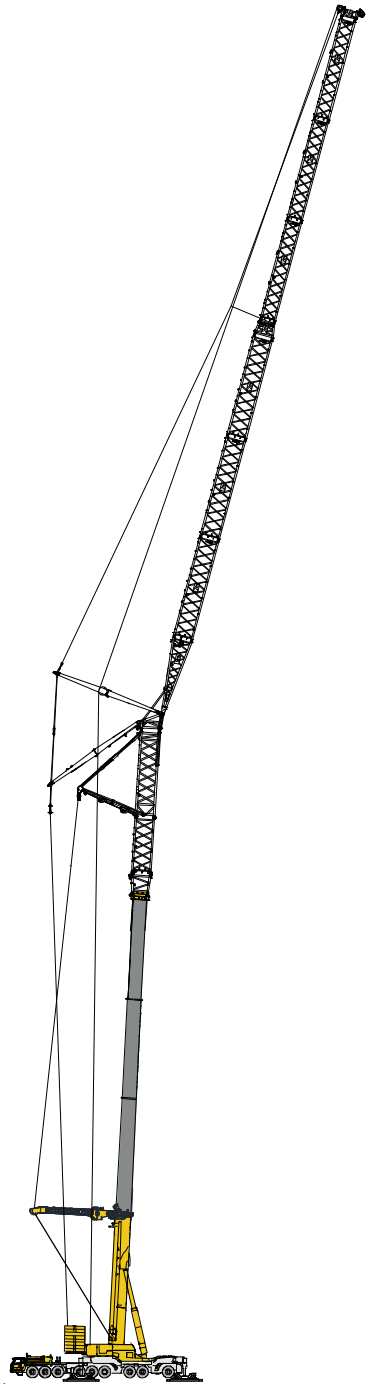


主臂 Boom	超起+主臂 Super lifting device+ boom	超起+变幅副臂 Super lifting device + Luffing jib
T:18.4m~92.4 m	T:35.4m~92.4 m	T:29m~51.7 m N:48m~102M V:21 m

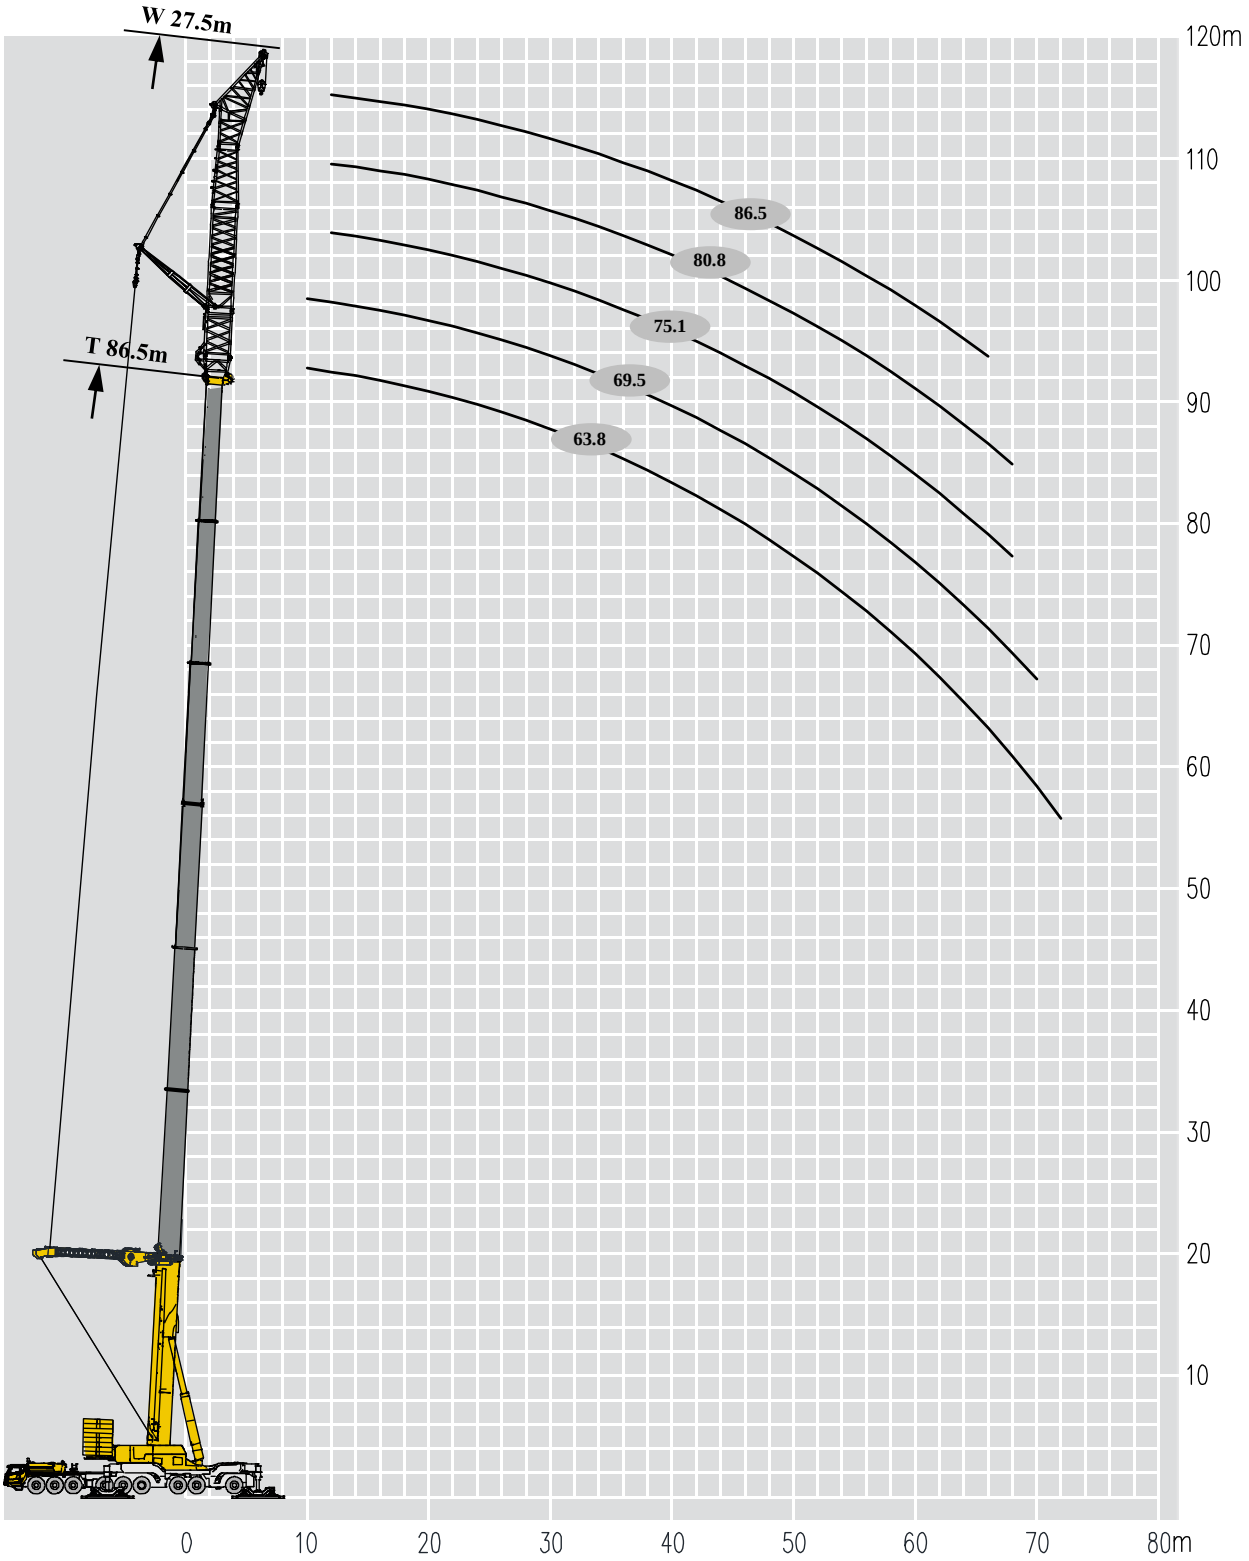
W 27.5m
T 86.5m
86.5
80.8
75.1
69.5
63.8
120m
110
100
90
80
70
60
50
40
30
20
10
0
10
20
30
40
50
60
70
80m










	63.8 m	69.5 m	75.1 m	80.8 m	83.8m	86.5 m	
10	178.4	178.4					10
12	178.4	178.4	178.4	170.0	164.7	159.4	12
14	172.9	172.0	170.1	169.1	155.7	144.2	14
16	154.9	153.9	153.0	151.1	139.7	129.2	16
18	139.7	138.7	137.8	135.9	124.8	114.7	18
20	125.4	124.5	123.5	121.6	110.7	101.7	20
22	112.1	111.2	110.2	109.3	104.1	100.8	22
24	100.7	100.7	98.8	97.9	93.4	90.9	24
26	91.2	90.3	89.3	88.4	84.2	81.9	26
28	75.4	75.1	74.4	73.2	71.3	71.6	28
30	65.7	65.4	64.7	63.5	61.7	62.0	30
32	57.4	57.2	56.5	55.4	53.5	53.8	32
34	50.4	50.2	49.4	48.3	46.5	46.8	34
36	44.2	44.0	43.3	42.2	40.4	40.7	36
38	38.9	38.7	38.0	36.9	35.1	35.4	38
40	34.1	33.9	33.3	32.2	30.4	30.7	40
42	29.9	29.7	29.1	28.0	26.2	26.5	42
44	26.1	25.9	25.3	24.2	22.5	22.8	44
46	22.7	22.5	21.9	20.8	19.1	19.4	46
48	19.6	19.4	18.8	17.8	16.0	16.3	48
50	16.8	16.6	16.0	15.0	13.2	13.6	50
52	14.2	14.1	13.4	12.4	10.7	11.0	52
54	11.8	11.7	11.1	10.1	8.4	8.7	54
56	9.6	9.5	8.9	7.9	6.2	6.5	56
58	7.6	7.5	6.9	5.9			58
60	5.7	5.6	5.1				60
吊钩	200t						吊钩
倍率	11			10			倍率
组合	111122	111222	112222	122222	333221	222222	组合
风速	9m/s						风速










	63.8 m	69.5 m	75.1 m	80.8 m	83.8m	86.5 m	
10	178.4	178.4					10
12	178.4	178.4	178.4	170.0	164.7	159.4	12
14	164.4	162.5	160.6	158.7	150.5	144.2	14
16	142.5	140.6	139.7	137.8	132.5	129.2	16
18	124.5	123.5	122.6	120.7	116.7	114.7	18
20	110.2	109.3	108.3	106.4	103.6	101.7	20
22	94.2	93.9	93.0	91.7	89.6	89.9	22
24	78.9	78.7	77.8	76.6	74.5	74.8	24
26	66.7	66.5	65.7	64.4	62.4	62.7	26
28	56.7	56.5	55.7	54.5	52.5	52.8	28
30	48.4	48.2	47.4	46.2	44.2	44.5	30
32	41.3	41.1	40.3	39.1	37.2	37.5	32
34	35.2	35.0	34.3	33.1	31.2	31.5	34
36	30.0	29.8	29.0	27.9	25.9	26.3	36
38	25.3	25.1	24.4	23.3	21.4	21.7	38
40	21.2	21.1	20.3	19.2	17.3	17.7	40
42	17.6	17.4	16.7	15.6	13.7	14.1	42
44	14.3	14.2	13.5	12.4	10.5	10.8	44
46	11.4	11.2	10.6	9.4	7.6	7.9	46
48	8.7	8.6	7.9	6.8	2.7	5.3	48
50	6.3	6.2	5.5				50
吊钩	200t						吊钩
倍率	11			10			倍率
组合	111122	111222	112222	122222	333221	222222	组合
风速	9m/s						风速











	63.8 m	69.5 m	75.1 m	80.8 m	83.8m	86.5 m	
10	178.4	178.4					10
12	169.1	167.2	164.4	162.5	152.1	142.6	12
14	143.5	142.5	140.6	138.7	136.8	136.8	14
16	124.5	122.6	121.6	119.7	118.3	117.8	16
18	97.9	97.6	96.7	95.2	92.9	93.3	18
20	77.9	77.6	76.7	75.3	73.1	73.5	20
22	62.8	62.5	61.7	60.3	58.2	58.6	22
24	51.1	50.8	50.0	48.7	46.6	46.9	24
26	41.6	41.4	40.6	39.3	37.3	37.6	26
28	33.9	33.7	32.9	31.6	29.6	30.0	28
30	27.5	27.2	26.5	25.2	23.3	23.6	30
32	22.0	21.8	21.0	19.8	17.9	18.2	32
34	17.3	17.1	16.3	15.2	13.2	13.6	34
36	13.2	13.0	12.3	11.1	9.2	9.5	36
38	9.6	9.5	8.7	7.6	5.7	6.0	38
40	6.5	6.3	5.6				40
吊钩	200t						吊钩
倍率	11		10			9	倍率
组合	111122	111222	112222	122222	333221	222222	组合
风速	9m/s						风速


W 39.5m
T 86.5m
86.5
80.8
75.1
69.5
63.8
140m
130
120
110
100
90
80
70
60
50
40
30
20
10
0
10
20
30
40
50
60
70
80m

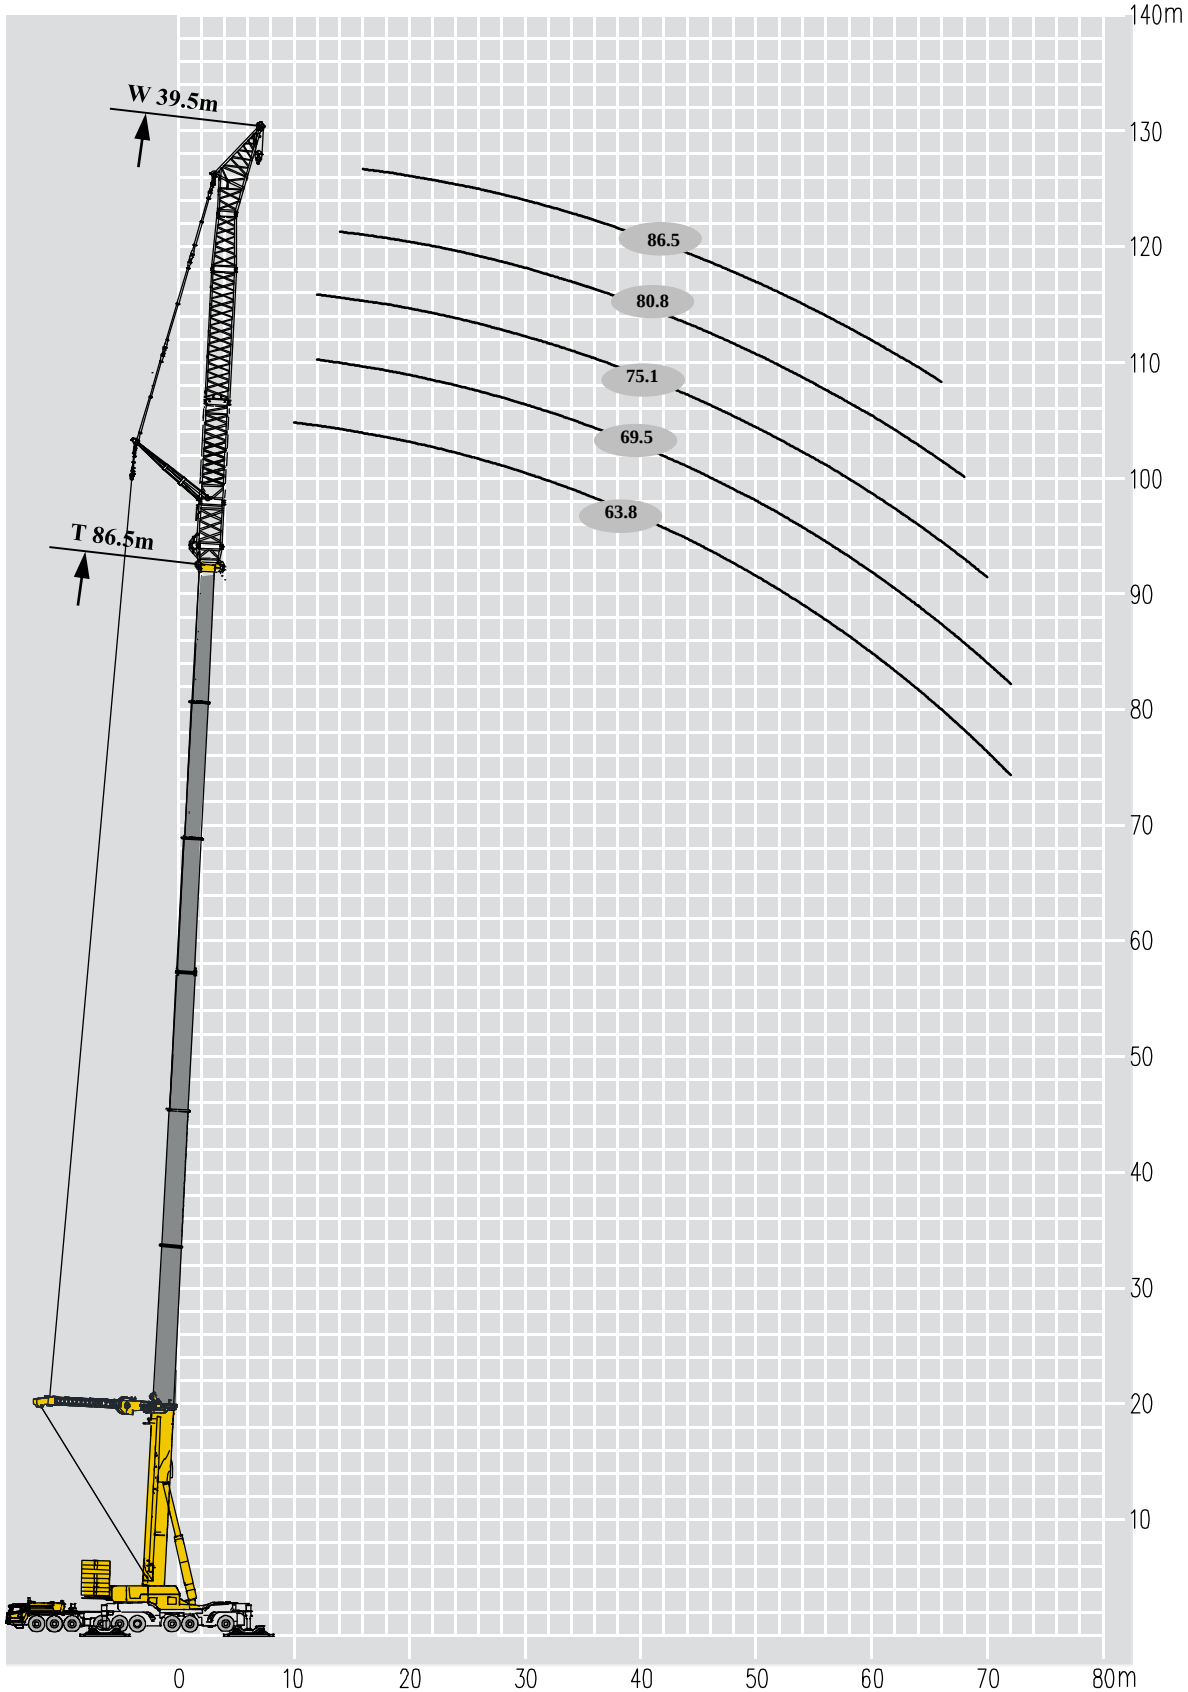









	63.8m	69.5m	75.1m	80.8m	83.8m	86.5m	
10	161.6						10
12	162.6	162.6					12
14	162.0	161.1	161.5				14
16	153.9	152.0	151.1	155.0	152.5	150.0	16
18	137.8	136.8	135.9	134.0	133.0	133.0	18
20	125.4	123.5	122.6	120.7	119.4	120.0	20
22	112.1	111.2	109.3	107.4	106.4	106.4	22
24	100.7	99.8	98.8	96.9	95.5	95.0	24
26	91.2	90.3	89.3	87.4	86.5	86.5	26
28	77.4	76.9	80.2	78.8	76.9	77.1	28
30	67.6	67.1	69.9	68.5	66.6	66.8	30
32	59.3	58.8	61.1	59.8	57.9	58.1	32
34	52.1	51.7	53.6	52.3	50.4	50.6	34
36	45.9	45.5	47.1	45.8	43.9	44.1	36
38	40.5	40.1	41.4	40.1	38.2	38.4	38
40	35.7	35.3	36.3	35.0	33.2	33.4	40
42	31.5	31.0	31.8	30.5	28.7	28.9	42
44	27.6	27.2	27.8	26.5	24.7	24.9	44
46	24.2	23.7	24.2	22.9	21.1	21.3	46
48	21.1	20.6	20.9	19.7	17.9	18.1	48
50	18.2	17.8	17.9	16.7	14.9	15.1	50
52	15.6	15.2	15.2	14.0	12.2	12.4	52
54	13.2	12.8	12.7	11.5	9.7	9.9	54
56	11.0	10.6	10.4	9.2	7.4	7.6	56
58	9.0	8.6	8.2	7.0	5.3	5.5	58
60	7.1	6.7	6.2	5.1			60
62	5.4	5.0					62
吊钩	200t						吊钩
倍率	10			9			倍率
组合	111122	111222	112222	122222	333221	222222	组合
风速	9m/s						风速











	63.8m	69.5m	75.1m	80.8m	83.8m	86.5m	
10	161.6						10
12	162.6	162.6					12
14	162.0	160.6	158.7				14
16	141.6	139.7	137.8	135.9	134.4	134.0	16
18	124.5	122.6	121.6	119.7	118.3	117.8	18
20	110.2	109.3	107.4	106.4	104.5	104.5	20
22	96.9	96.3	95.3	93.8	91.7	91.9	22
24	81.5	80.9	79.9	78.4	76.4	76.6	24
26	69.1	68.5	67.5	66.1	64.1	64.3	26
28	58.9	58.4	57.4	56.0	54.1	54.3	28
30	50.5	49.9	48.9	47.6	45.7	45.9	30
32	43.3	42.8	41.8	40.5	38.6	38.8	32
34	37.1	36.6	35.7	34.3	32.5	32.7	34
36	31.8	31.3	30.3	29.0	27.2	27.4	36
38	27.1	26.6	25.7	24.4	22.5	22.7	38
40	22.9	22.5	21.5	20.3	18.4	18.6	40
42	19.3	18.8	17.9	16.6	14.8	15.0	42
44	16.0	15.5	14.6	13.3	11.5	11.7	44
46	13.0	12.5	11.6	10.4	8.6	8.8	46
48	10.3	9.8	8.9	7.7	5.8	6.1	48
50	7.8	7.4	6.5	5.3			50
52	5.6	5.1					52
吊钩	200t						吊钩
倍率	10			9			倍率
组合	111122	111222	112222	122222	333221	222222	组合
风速	9m/s						风速











	63.8m	69.5m	75.1m	80.8m	83.8m	86.5m	
10	161.6						10
12	162.6	162.6					12
14	142.5	140.6	138.7				14
16	123.5	121.6	120.7	118.8	117.3	116.9	16
18	101.4	100.7	99.6	98.0	95.8	96.0	18
20	80.9	80.3	79.2	77.7	75.6	75.7	20
22	65.6	65.0	63.9	62.4	60.4	60.5	22
24	53.6	53.0	52.0	50.5	48.5	48.7	24
26	44.0	43.4	42.4	41.0	39.0	39.2	26
28	36.1	35.6	34.6	33.2	31.3	31.4	28
30	29.5	29.0	28.0	26.7	24.8	24.9	30
32	24.0	23.5	22.5	21.2	19.3	19.4	32
34	19.2	18.7	17.7	16.4	14.5	14.7	34
36	15.0	14.5	13.6	12.3	10.4	10.6	36
38	11.4	10.9	10.0	8.7	6.9	7.0	38
40	8.2	7.7	6.8	5.5			40
42	5.3						42
吊钩	200t						吊钩
倍率	10		9		7		倍率
组合	111122	111222	112222	122222	333221	222222	组合
风速	9m/s						风速


W 51.5m
T 86.5m
86.5
80.8
75.1
69.5
63.8
150m
140
130
120
110
100
90
80
70
60
50
40
30
20
10
0
10
20
30
40
50
60
70
80m

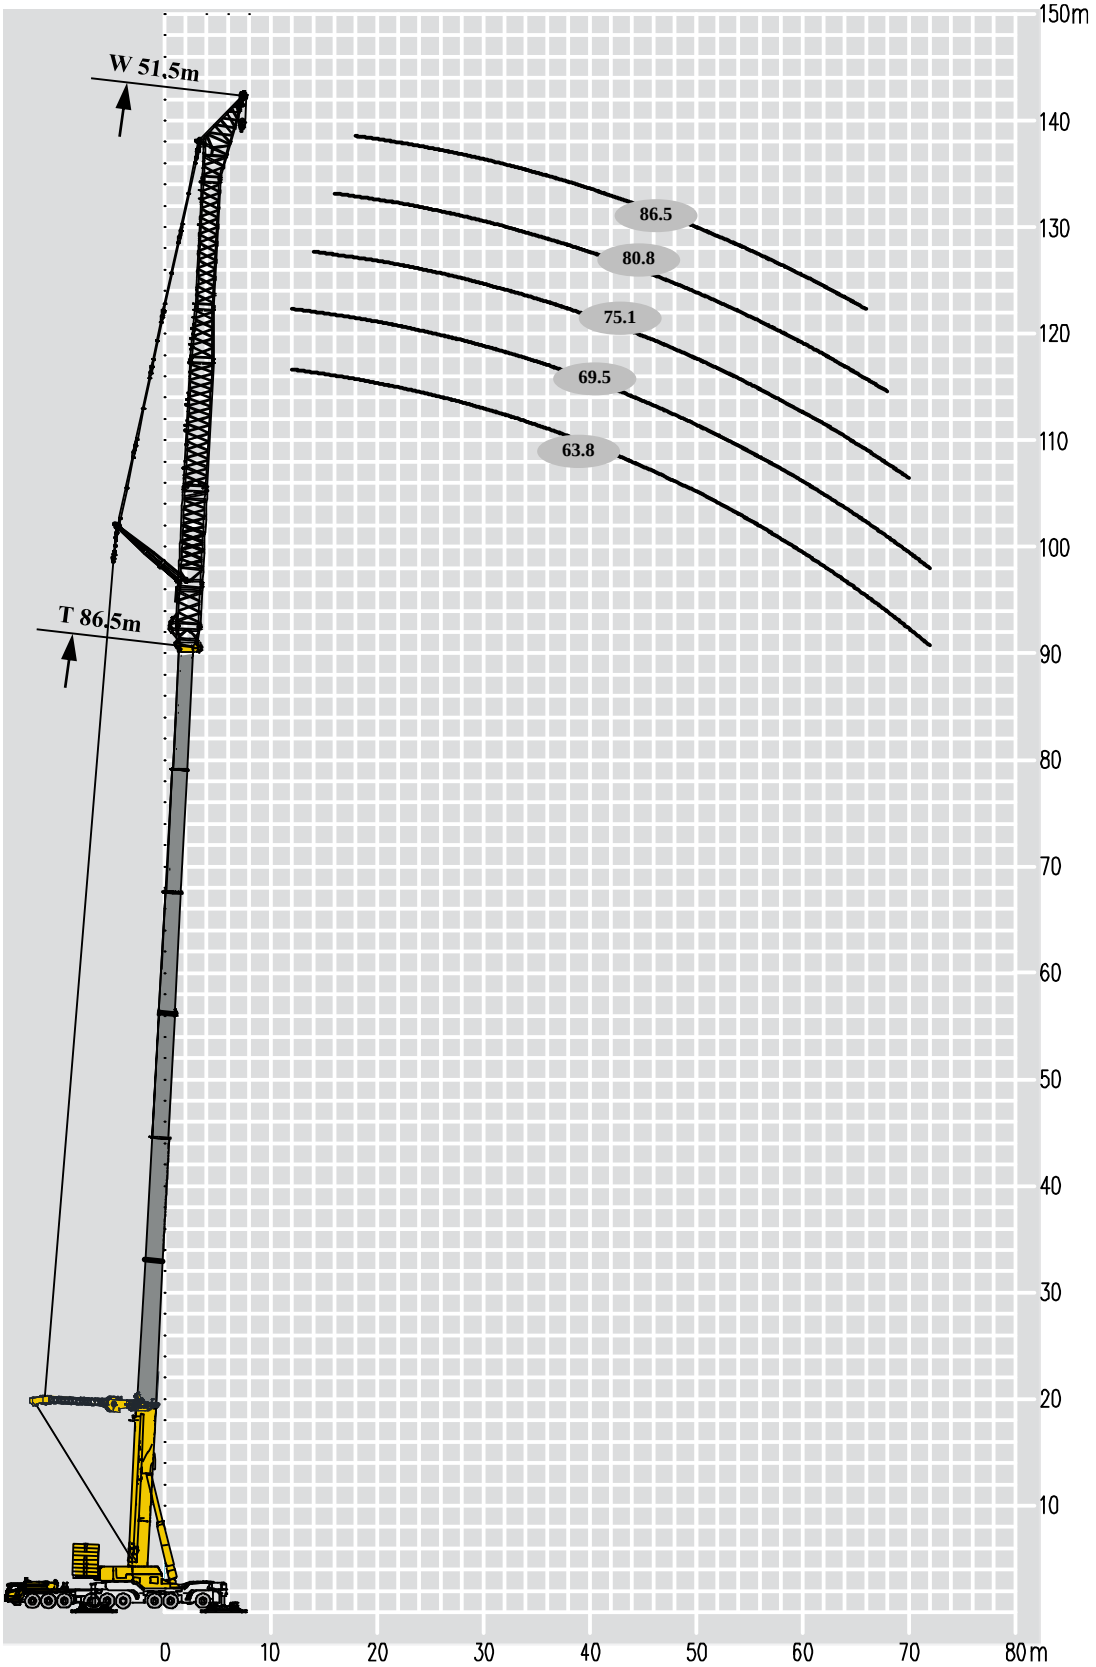








	63.8m	69.5m	75.1m	80.8m	83.8m	86.5m	
12	136.0						12
14	136.0	136.0					14
16	135.2	134.3	132.6				16
18	122.4	120.7	119.9	125.0	125.0	120.0	18
20	110.5	109.7	108.0	107.1	107.0	106.9	20
22	99.5	97.8	96.9	95.2	94.4	94.4	22
24	89.3	88.4	87.6	85.9	84.6	84.2	24
26	80.8	79.9	79.1	77.4	76.5	76.5	26
28	73.1	72.3	71.4	70.6	68.9	68.9	28
30	64.6	63.9	62.9	61.6	60.0	60.0	30
32	56.6	56.0	55.0	53.7	52.1	52.1	32
34	49.8	49.2	48.2	46.9	45.3	45.4	34
36	43.9	43.3	42.3	41.0	39.4	39.5	36
38	38.7	38.1	37.1	35.9	34.3	34.3	38
40	34.1	33.5	32.6	31.3	29.8	29.8	40
42	30.1	29.5	28.5	27.3	25.7	25.8	42
44	26.4	25.8	24.9	23.7	22.1	22.2	44
46	23.1	22.5	21.6	20.4	18.8	18.9	46
48	20.1	19.6	18.6	17.4	15.9	15.9	48
50	17.4	16.8	15.9	14.7	13.2	13.3	50
52	15.0	14.4	13.5	12.3	10.7	10.8	52
54	12.7	12.1	11.2	10.0	8.5	8.6	54
56	10.6	10.0	9.1	7.9	6.4	6.5	56
58	8.7	8.1	7.2	6.0			58
60	6.9	6.3	5.4				60
62	5.2						62
吊钩	200t			130t			吊钩
倍率	9		8				倍率
组合	111122	111222	112222	122222	333221	222222	组合
风速	9m/s						风速










	63.8m	69.5m	75.1m	80.8m	83.8m	86.5m	
12	136.0						12
14	136.0	136.0					14
16	135.2	134.3	132.6				16
18	122.4	120.7	119.7	117.8	113.4	110.0	18
20	108.3	107.4	106.4	104.5	103.1	102.6	20
22	96.9	96.0	94.1	93.1	91.7	91.2	22
24	82.7	81.9	80.7	79.2	77.3	77.3	24
26	70.2	69.4	68.2	66.7	64.8	64.9	26
28	59.9	59.1	58.0	56.5	54.6	54.7	28
30	51.3	50.5	49.4	47.9	46.1	46.2	30
32	44.0	43.3	42.2	40.7	38.9	38.9	32
34	37.7	37.0	35.9	34.5	32.7	32.8	34
36	32.3	31.6	30.5	29.1	27.3	27.4	36
38	27.6	26.9	25.8	24.4	22.6	22.7	38
40	23.4	22.7	21.6	20.2	18.5	18.6	40
42	19.7	19.0	17.9	16.5	14.8	14.9	42
44	16.3	15.6	14.6	13.2	11.5	11.5	44
46	13.3	12.6	11.6	10.2	8.5	8.6	46
48	10.6	9.9	8.9	7.5	5.8	5.9	48
50	8.1	7.4	6.4	5.1			50
52	5.8	5.2					52
吊钩	200t			130t			吊钩
倍率	9		8	7			倍率
组合	111122	111222	112222	122222	333221	222222	组合
风速	9m/s						风速















	63.8m	69.5m	75.1m	80.8m	83.8m	86.5m	
12	136.0						12
14	136.0	136.0					14
16	121.6	120.7	118.8				16
18	103.5	102.6	101.3	99.6	97.5	97.5	18
20	82.7	81.8	80.6	78.9	76.9	76.9	20
22	67.0	66.2	65.0	63.4	61.4	61.5	22
24	54.8	54.0	52.8	51.3	49.4	49.4	24
26	45.1	44.3	43.1	41.6	39.7	39.8	26
28	37.0	36.3	35.1	33.7	31.8	31.8	28
30	30.4	29.6	28.5	27.0	25.2	25.2	30
32	24.7	24.0	22.8	21.4	19.6	19.6	32
34	19.8	19.1	18.0	16.6	14.8	14.8	34
36	15.6	14.9	13.8	12.4	10.6	10.7	36
38	11.9	11.2	10.1	8.7	7.0	7.0	38
40	8.6	7.9	6.9	5.5			40
42	5.7	5.0					42
吊钩	200t		130t				吊钩
倍率	9		7	6			倍率
组合	111122	111222	112222	122222	333221	222222	组合
风速	9m/s						风速

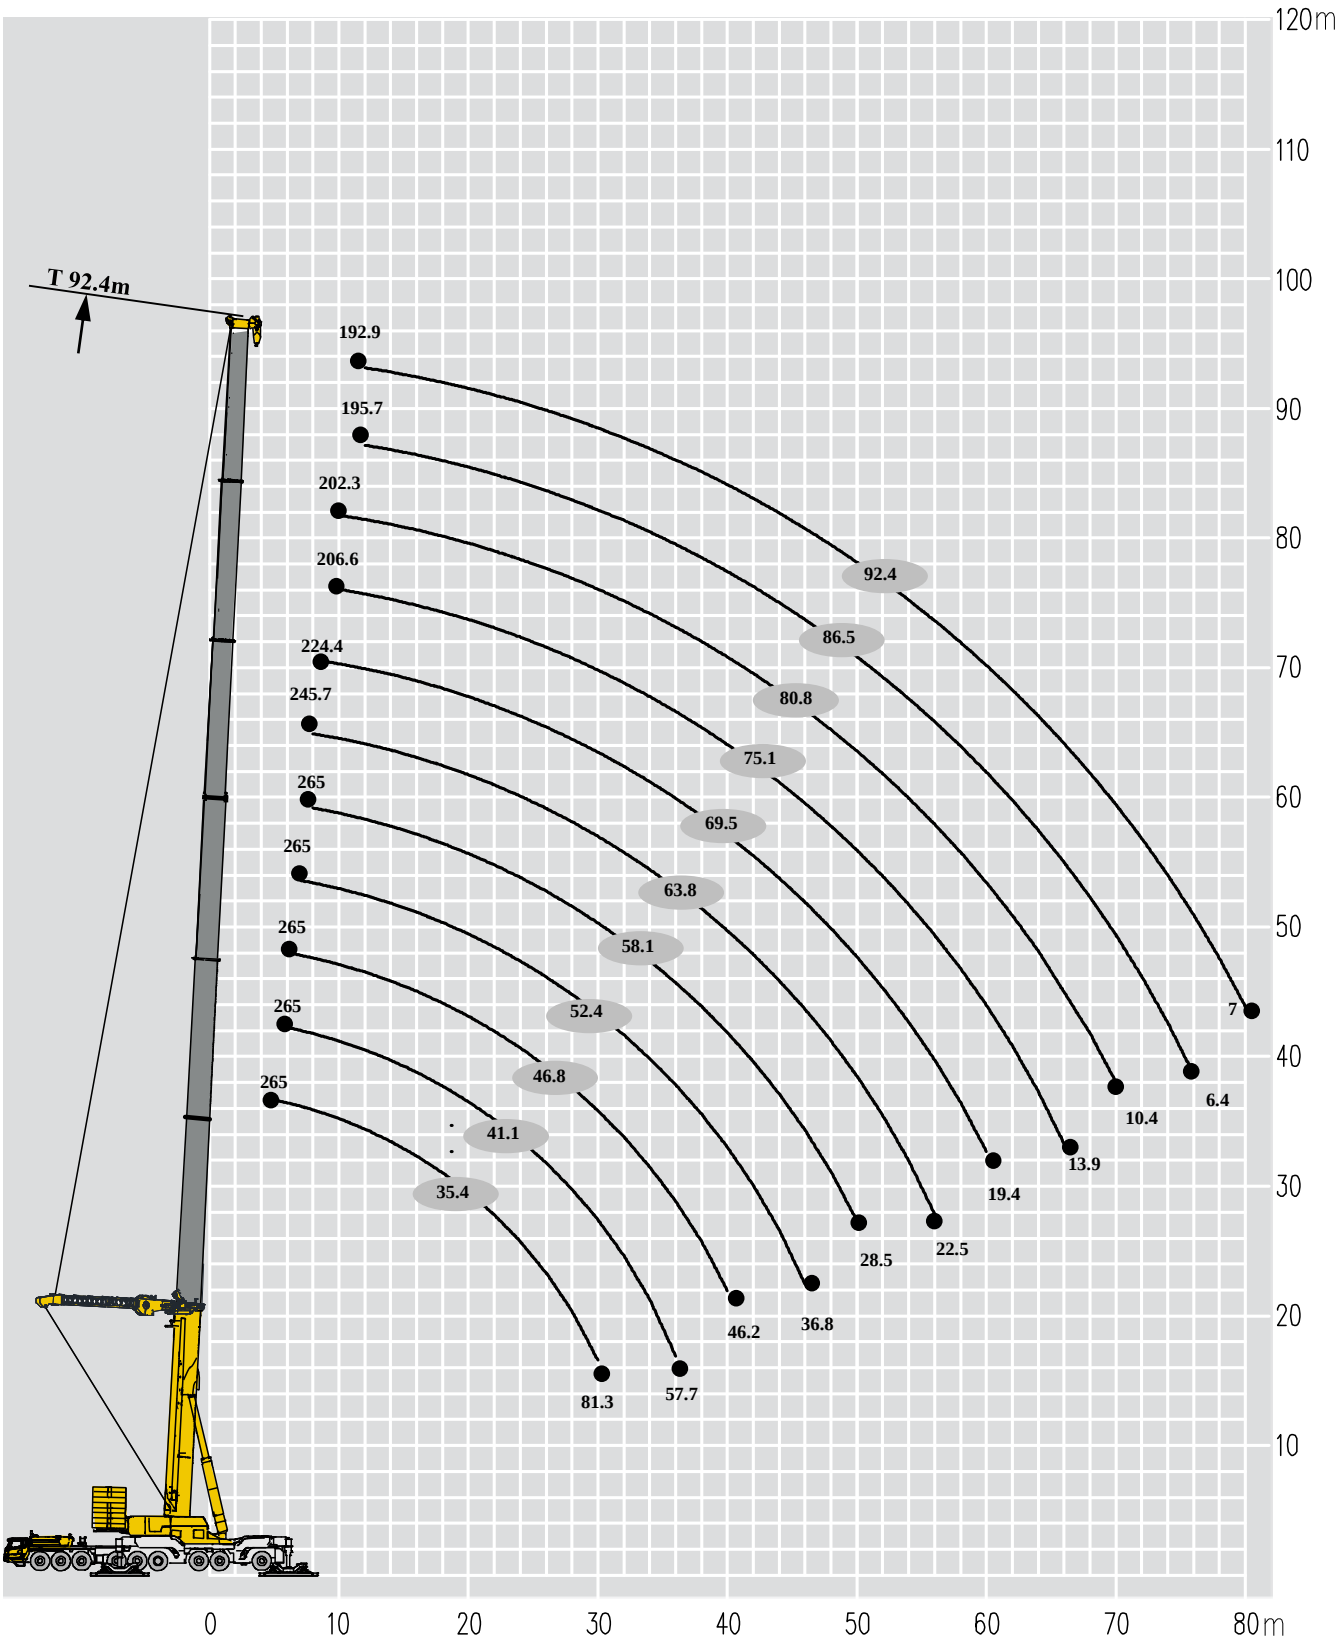
T 92.4m
192.9
195.7
202.3
206.6
224.4
245.7
265
265
265
265
265
92.4
86.5
80.8
75.1
69.5
63.8
58.1
52.4
46.8
41.1
35.4
81.3
57.7
46.2
36.8
28.5
22.5
19.4
13.9
10.4
6.4
7
120m
110
100
90
80
70
60
50
40
30
20
10
0
10
20
30
40
50
60
70
80m

起重性能表
Lifting capacities

T 35.4~58.1m








	35.4m	35.4m	41.1m	41.1m	46.8m	46.8m	52.4m	52.4m	58.1m	58.1m	
5	265.0	265.0									5
6	265.0	265.0	265.0	265.0	265.0	265.0					6
7	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0			7
8	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	8
9	265.0	265.0	265.0	265.0	265.0	264.1	264.1	261.3	258.4	255.6	9
10	256.5	254.6	252.7	249.9	248.0	245.1	246.1	243.2	240.4	238.5	10
12	224.2	221.4	221.4	218.5	217.6	213.8	215.7	212.8	210.9	209.0	12
14	197.6	195.7	195.7	192.9	191.9	189.1	191.0	188.1	187.2	184.3	14
16	175.8	173.9	174.8	171.0	172.0	168.2	171.0	168.2	167.2	165.3	16
18	158.7	154.9	156.8	153.0	154.9	150.1	154.9	151.1	151.1	148.2	18
20	139.7	136.8	138.7	134.9	136.8	133.0	137.8	134.0	134.9	131.1	20
22	124.5	121.6	124.5	120.7	122.6	117.8	123.5	119.7	120.7	116.9	22
24	111.2	108.3	111.2	107.4	110.2	105.5	111.2	107.4	108.3	104.5	24
26	100.7	96.9	100.7	96.9	98.8	95.0	100.7	96.9	97.9	95.0	26
28	90.3	87.4	91.2	87.4	90.3	85.5	92.2	87.4	89.3	85.5	28
30	81.3	76.6	82.7	78.9	81.7	77.0	83.6	79.8	81.7	77.9	30
32			74.3	68.8	75.1	68.8	77.0	73.2	75.1	71.3	32
34			65.5	60.1	66.4	60.2	70.3	65.6	68.4	64.6	34
36			57.7	52.3	58.9	52.7	63.6	58.1	62.3	57.3	36
38					52.2	46.1	57.0	51.5	55.8	50.8	38
40					46.2	40.1	51.1	45.7	50.0	45.0	40
42							45.8	40.5	44.8	39.9	42
44							41.1	35.8	40.1	35.3	44
46							36.8	31.5	35.9	31.1	46
48									32.1	27.2	48
50									28.5	23.7	50
52											52
54											54
56											56
吊钩	360t	360t	360t	360t	360t	360t	360t	360t	360t	360t	吊钩
倍率	18	18	18	18	18	18	18	18	18	18	倍率
组合	000111	001110	001111	011110	011111	111110	011112	111111	111112	211111	组合
风速	11.1m/s	11.1m/s	11.1m/s	11.1m/s	11.1m/s	11.1m/s	11.1m/s	11.1m/s	11.1m/s	11.1m/s	风速

起重性能表
Lifting capacities

T 63.8~92.4m




	63.8m	63.8m	69.5m	69.5m	75.1m	75.1m	80.8m	80.8m	86.5m	92.4m	
8	245.7	242.3									8
9	227.8	225.3	224.4	221.9							9
10	217.0	209.1	213.0	204.0	206.6	204.0	202.3	201.5			10
12	209.0	201.0	188.0	184.0	181.9	178.5	178.5	176.8	195.7	192.9	12
14	185.3	181.5	183.4	179.6	172.0	165.0	159.0	158.0	174.8	172.0	14
16	166.3	162.5	164.4	160.6	162.5	158.7	151.0	150.0	156.8	154.9	16
18	150.1	145.4	149.2	144.4	147.3	142.5	144.4	141.6	141.6	139.7	18
20	134.0	129.2	133.0	127.3	131.1	127.3	129.2	126.4	126.4	124.5	20
22	120.7	115.0	119.7	114.0	117.8	114.0	115.9	113.1	113.1	112.1	22
24	108.3	103.6	108.3	102.6	106.4	102.6	104.5	102.6	102.6	101.7	24
26	98.8	93.1	97.9	93.1	96.9	93.1	95.0	93.1	93.1	92.2	26
28	90.3	84.6	89.3	84.6	88.4	84.6	87.4	84.6	85.5	84.6	28
30	82.7	77.0	81.7	77.0	80.8	77.0	79.8	77.0	77.9	77.0	30
32	75.1	70.3	75.1	70.3	75.1	70.3	73.2	71.3	71.3	71.3	32
34	69.4	64.6	69.4	64.6	69.4	64.6	67.5	65.6	66.5	65.6	34
36	63.7	57.7	64.6	58.9	63.7	59.9	62.7	59.9	60.8	60.8	36
38	58.5	51.2	59.9	52.4	58.9	54.2	58.0	56.1	56.1	56.1	38
40	52.7	45.5	54.2	46.7	54.6	48.5	54.2	50.7	52.3	52.3	40
42	47.5	40.4	49.0	41.6	49.5	43.4	49.0	45.5	47.9	48.5	42
吊钩	360t	360t	360t	360t	360t	360t	360t	360t	200t	200t	吊钩
倍率	16	16	15	14	13	13	13	13	13	12	倍率
组合	111122	221111	111222	222111	112222	222211	122222	222221	222222	333333	组合
风速	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	风速

起重性能表
Lifting capacities

T 63.8~92.4m












	63.8m	63.8m	69.5m	69.5m	75.1m	75.1m	80.8m	80.8m	86.5m	92.4m	
44	42.9	35.8	44.4	37.0	44.8	38.8	44.4	41.0	43.3	43.9	44
46	38.7	31.6	40.2	32.9	40.7	34.7	40.3	36.8	39.2	39.8	46
48	34.9	27.9	36.4	29.1	36.9	31.0	36.5	33.1	35.4	34.1	48
50	31.4	24.4	33.0	25.7	33.5	27.6	33.1	29.7	32.0	29.2	50
52	28.2	21.2	29.8	22.6	30.3	24.5	30.0	26.6	28.9	26.5	52
54	25.2	18.3	26.9	19.7	27.4	21.6	27.1	23.7	26.1	23.9	54
56	22.5	15.6	24.2	17.0	24.8	18.9	24.5	21.1	23.4	21.6	56
58			21.7	14.6	22.3	16.5	22.0	18.7	21.0	19.4	58
60			19.4	12.2	20.0	14.2	19.7	16.4	18.7	17.4	60
62					17.9	12.1	17.6	14.3	16.6	15.5	62
64					15.8	10.1	15.6	12.3	14.7	13.7	64
66					13.9	8.2	13.8	10.5	11.1	10.9	66
68							12.0	8.7	9.5	9.5	68
70							10.4	7.1	8.1	8.2	70
72									6.4	7.0	72
吊钩	360t	360t	360t	360t	360t	360t	360t	360t	200t	200t	吊钩
倍率	16	16	15	14	13	13	13	13	13	12	倍率
组合	111122	221111	111222	222111	112222	222211	122222	222221	222222	333333	组合
风速	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	风速

起重性能表
Lifting capacities


T 35.4~58.1m



	35.4m	35.4m	41.1m	41.1m	46.8m	46.8m	52.4m	52.4m	58.1m	58.1m	
5	265.0	265.0									5
6	265.0	265.0	265.0	265.0	265.0	265.0					6
7	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0			7
8	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	8
9	265.0	265.0	263.2	260.3	257.5	254.6	254.6	252.7	249.9	247.0	9
10	248.0	246.1	244.2	241.3	239.4	236.6	237.5	234.7	232.8	229.9	10
12	216.6	213.8	212.8	210.0	210.0	206.2	208.1	205.2	203.3	201.4	12
14	186.2	182.4	183.4	179.6	180.5	175.8	179.6	175.8	174.8	172.0	14
16	159.6	156.8	158.7	154.9	155.8	151.1	155.8	152.0	152.0	148.2	16
18	139.7	135.9	138.7	134.0	135.9	132.1	136.8	133.0	133.0	130.2	18
20	122.6	118.8	121.6	117.8	119.7	115.9	120.7	116.9	117.8	115.0	20
22	107.9	102.9	108.3	104.5	106.4	102.6	108.3	104.5	105.5	101.7	22
24	90.5	85.6	93.3	87.4	93.7	86.9	96.9	92.5	95.0	91.2	24
26	76.5	71.8	79.4	73.6	79.9	73.3	84.7	78.8	83.1	77.7	26
28	65.0	60.3	68.0	62.3	68.5	62.0	73.3	67.5	71.8	66.5	28
30	55.1	50.5	58.4	52.8	59.0	52.6	63.8	58.1	62.3	57.1	30
32			50.2	44.7	51.0	44.7	55.7	50.1	54.3	49.2	32
34			43.1	37.7	44.0	37.8	48.7	43.2	47.4	42.4	34
36			36.8	31.4	37.9	31.8	42.7	37.2	41.4	36.4	36
38					32.6	26.4	37.4	31.9	36.2	31.2	38
40					27.7	21.7	32.6	27.3	31.5	26.6	40
42							28.4	23.1	27.3	22.5	42
44							24.6	19.3	23.6	18.8	44
46							21.1	15.8	20.2	15.4	46
48									17.1	12.3	48
50									14.3	9.5	50
吊钩	360t	360t	360t	360t	360t	360t	360t	360t	360t	360t	吊钩
倍率	18	18	18	18	18	18	18	18	18	18	倍率
组合	000111	001110	001111	011110	011111	111110	011112	111111	111112	211111	组合
风速	11.1m/s	11.1m/s	11.1m/s	11.1m/s	11.1m/s	11.1m/s	11.1m/s	11.1m/s	11.1m/s	11.1m/s	风速

起重性能表
Lifting capacities


T 63.8~92.4m



	63.8m	63.8m	69.5m	69.5m	75.1m	75.1m	80.8m	80.8m	86.5m	92.4m	
8	245.7	242.3									
9	227.8	225.3	224.4	221.9							9
10	217.0	209.1	213.0	204.0	206.6	204.0	202.3	201.5			10
12	201.4	197.6	188.0	184.0	181.9	178.5	178.5	176.8	188.1	185.3	12
14	173.9	169.1	172.0	166.3	169.1	165.0	159.0	158.0	162.5	159.6	14
16	151.1	146.3	149.2	144.4	147.3	143.5	144.4	142.5	141.6	139.7	16
18	133.0	128.3	132.1	126.4	130.2	125.4	127.3	125.4	124.5	122.6	18
20	117.8	113.1	116.9	112.1	115.0	111.2	113.1	111.2	111.2	109.3	20
22	105.5	100.7	104.5	99.8	103.6	99.8	101.7	98.8	99.8	97.9	22
24	95.0	90.3	94.1	89.3	93.1	89.3	91.2	89.3	89.3	88.4	24
26	85.5	78.0	85.5	79.2	84.6	80.8	82.7	80.8	80.8	80.8	26
28	74.5	66.8	76.1	68.0	76.4	69.9	75.9	72.1	74.1	73.2	28
30	65.1	57.5	66.6	58.6	66.9	60.5	66.4	62.7	65.1	65.8	30
32	57.0	49.5	58.5	50.7	58.9	52.5	58.4	54.7	57.1	57.8	32
34	50.1	42.7	51.6	43.9	52.0	45.7	51.5	47.9	50.3	50.9	34
36	44.1	36.8	45.6	38.0	46.0	39.8	45.6	42.0	44.3	45.0	36
38	38.9	31.6	40.4	32.8	40.8	34.6	40.3	36.8	39.1	39.8	38
40	34.2	27.0	35.7	28.2	36.2	30.1	35.7	32.2	34.5	35.2	40
42	30.1	22.9	31.6	24.2	32.0	26.0	31.6	28.1	30.5	31.1	42
44	26.3	19.3	27.9	20.5	28.3	22.3	27.9	24.5	26.8	27.4	44
46	23.0	15.9	24.5	17.2	25.0	19.0	24.6	21.2	23.5	24.1	46
48	19.9	12.9	21.5	14.2	22.0	16.0	21.6	18.2	20.5	21.1	48
50	17.1	10.2	18.7	11.5	19.2	13.3	18.9	15.5	17.8	18.4	50
52	14.6	7.6	16.2	8.9	16.7	10.8	16.4	13.0	15.3	15.9	52
54	12.2	5.2	13.8	6.6	14.4	8.5	14.1	10.7	13.0	13.7	54
56	9.9		11.7		12.2	6.4	11.9	8.6	10.9	11.5	56
58			9.7		10.2		10.0	6.6	8.9	9.6	58
60			7.8		8.4		8.1		7.1	7.8	60
62					6.7		6.4		5.4	6.1	62
64					5.0						64
吊钩	360t	360t	360t	360t	360t	360t	360t	360t	200t	200t	吊钩
倍率	16	16	15	14	13	13	13	13	12	12	倍率
组合	111122	221111	111222	222111	112222	222211	122222	222221	222222	333333	组合
风速	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	风速

起重性能表
Lifting capacities


T 35.4~58.1m



	35.4m	35.4m	41.1m	41.1m	46.8m	46.8m	52.4m	52.4m	58.1m	58.1m	
5	265.0	265.0									5
6	265.0	265.0	265.0	265.0	265.0	265.0					6
7	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0			7
8	265.0	265.0	265.0	265.0	265.0	265.0	265.0	263.2	259.4	257.5	8
9	257.5	254.6	252.7	248.9	247.0	243.2	244.2	240.4	237.5	234.7	9
10	231.8	229.0	228.0	224.2	223.3	218.5	221.4	217.6	215.7	211.9	10
12	191.0	188.1	189.1	185.3	185.3	180.5	184.3	180.5	179.6	175.8	12
14	161.5	157.7	159.6	155.8	156.8	152.0	156.8	153.0	153.0	149.2	14
16	138.0	132.2	136.8	133.0	134.9	130.2	134.9	131.1	132.1	128.3	16
18	107.3	101.8	110.0	103.4	110.2	102.6	115.5	108.7	113.6	107.4	18
20	85.3	80.1	88.0	81.7	88.3	81.0	93.3	86.9	91.5	85.7	20
22	68.7	63.6	71.4	65.3	71.7	64.8	76.7	70.5	75.0	69.3	22
24	55.7	50.8	58.4	52.5	58.9	52.1	63.7	57.7	62.1	56.6	24
26	45.2	40.4	48.0	42.3	48.5	41.9	53.3	47.4	51.7	46.4	26
28	36.4	31.7	39.5	33.8	40.0	33.5	44.8	39.0	43.3	38.0	28
30	29.0	24.3	32.3	26.7	32.9	26.5	37.6	31.9	36.2	31.0	30
32			26.1	20.6	26.8	20.5	31.5	25.9	30.2	25.1	32
34			20.7	15.2	21.6	15.4	26.3	20.8	25.0	19.9	34
36			15.9	10.5	17.0	10.9	21.8	16.3	20.5	15.5	36
38					13.0	6.8	17.8	12.3	16.6	11.6	38
40					9.3		14.2	8.8	13.1	8.1	40
42							11.0	5.6	9.9	5.0	42
44							8.1		7.1		44
46							5.4				46
吊钩	360t	360t	360t	360t	360t	360t	360t	360t	360t	360t	吊钩
倍率	18	18	18	18	18	18	18	18	17	17	倍率
组合	000111	001110	001111	011110	011111	111110	011112	111111	111112	211111	组合
风速	11.1m/s	11.1m/s	11.1m/s	11.1m/s	11.1m/s	11.1m/s	11.1m/s	11.1m/s	11.1m/s	11.1m/s	风速

起重性能表
Lifting capacities


T 63.8~92.4m



	63.8m	63.8m	69.5m	69.5m	75.1m	75.1m	80.8m	80.8m	86.5m	92.4m	
8	245.7	242.3									
9	227.8	225.3	224.4	221.9							9
10	212.8	208.1	209.0	204.0	205.2	201.4	200.5	198.6			10
12	177.7	172.9	174.8	170.1	172.0	168.2	169.1	166.3	165.3	162.5	12
14	152.0	146.3	150.1	144.4	147.3	143.5	144.4	142.5	141.6	139.7	14
16	131.1	126.4	130.2	125.4	128.3	124.5	125.4	123.5	122.6	121.6	16
18	115.0	107.6	114.0	108.9	112.1	108.3	110.2	108.3	108.3	106.4	18
20	94.5	85.9	96.1	87.1	96.4	89.1	95.8	91.5	94.2	94.9	20
22	77.9	69.6	79.4	70.8	79.8	72.7	79.2	75.1	77.7	78.3	22
24	64.9	56.8	66.5	58.0	66.8	60.0	66.2	62.3	64.8	65.4	24
26	54.5	46.6	56.1	47.8	56.4	49.7	55.9	52.0	54.5	55.1	26
28	46.0	38.3	47.5	39.5	47.9	41.3	47.4	43.6	46.0	46.7	28
30	38.9	31.3	40.4	32.5	40.8	34.3	40.3	36.5	39.0	39.6	30
32	32.9	25.4	34.4	26.6	34.8	28.4	34.3	30.6	33.0	33.6	32
34	27.7	20.3	29.2	21.5	29.6	23.3	29.1	25.5	27.9	28.5	34
36	23.2	15.9	24.7	17.1	25.1	18.9	24.7	21.1	23.4	24.1	36
38	19.3	12.0	20.8	13.2	21.2	15.0	20.7	17.2	19.5	20.2	38
40	15.8	8.6	17.3	9.8	17.7	11.6	17.3	13.7	16.1	16.7	40
42	12.6	5.5	14.2	6.7	14.6	8.6	14.2	10.7	13.0	13.7	42
44	9.8		11.4	4.0	11.8	5.8	11.4	7.9	10.3	10.9	44
46	7.3		8.9		9.3		8.9	5.5	7.8	8.4	46
48	5.0		6.6		7.0		6.7		5.6	6.2	48
50					5.0						50
吊钩	360t	360t	360t	360t	360t	360t	360t	200t	200t	200t	吊钩
倍率	16	16	15	14	13	13	13	13	11	10	倍率
组合	111122	221111	111222	222111	112222	222211	122222	222221	222222	333333	组合
风速	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	风速

起重性能表
Lifting capacities

T 35.4~58.1m




	35.4m	35.4m	41.1m	41.1m	46.8m	46.8m	52.4m	52.4m	58.1m	58.1m	
5	265.0	265.0									5
6	265.0	265.0	265.0	265.0	265.0	265.0					6
7	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0			7
8	263.2	259.4	257.5	253.7	250.8	247.0	248.0	244.2	241.3	237.5	8
9	233.7	230.9	229.9	226.1	224.2	220.4	222.3	218.5	215.7	212.8	9
10	210.0	207.1	206.2	202.4	202.4	197.6	200.5	196.7	194.8	191.9	10
12	172.9	169.1	170.1	166.3	167.2	162.5	166.3	162.5	162.5	158.7	12
14	131.5	125.2	134.4	126.7	134.5	125.7	140.5	132.7	137.8	131.0	14
16	96.1	90.3	98.9	91.9	99.1	91.0	104.6	97.4	102.5	96.0	16
18	72.4	67.0	75.1	68.5	75.4	67.8	80.6	73.9	78.7	72.5	18
20	55.4	50.2	58.1	51.8	58.4	51.1	63.5	57.0	61.7	55.8	20
22	42.5	37.5	45.2	39.2	45.6	38.6	50.5	44.3	48.8	43.2	22
24	32.4	27.5	35.2	29.3	35.6	28.8	40.5	34.4	38.9	33.3	24
26	24.3	19.5	27.1	21.3	27.6	21.0	32.4	26.5	30.8	25.4	26
28	17.4	12.7	20.4	14.8	21.0	14.5	25.7	20.0	24.3	19.0	28
30	11.5	6.9	14.8	9.2	15.5	9.1	20.2	14.5	18.8	13.6	30
32			10.0		10.8		15.5	9.8	14.1	9.0	32
34			5.7		6.7		11.4	5.8	10.1	5.0	34
36							7.8		6.6		36
吊钩	360t	360t	360t	360t	360t	360t	360t	360t	360t	360t	吊钩
倍率	18	18	18	18	18	18	18	18	16	16	倍率
组合	000111	001110	001111	011110	011111	111110	011112	111111	111112	211111	组合
风速	11.1m/s	11.1m/s	11.1m/s	11.1m/s	11.1m/s	11.1m/s	11.1m/s	11.1m/s	11.1m/s	11.1m/s	风速

起重性能表
Lifting capacities

T 63.8~92.4m









	63.8m	63.8m	69.5m	69.5m	75.1m	75.1m	80.8m	80.8m	86.5m	92.4m	
8	237.5	232.8									
9	212.8	208.1	209.0	204.3							9
10	192.9	188.1	190.0	185.3	186.2	182.4	182.4	179.6			10
12	160.6	155.8	158.7	153.9	155.8	152.0	153.0	151.1	149.2	147.3	12
14	136.8	131.2	135.9	130.2	133.0	129.2	130.2	128.3	127.3	125.4	14
16	105.8	96.2	107.5	97.5	107.8	99.7	107.0	102.3	105.3	106.0	16
18	81.8	72.8	83.4	74.0	83.8	76.1	83.1	78.6	81.4	82.1	18
20	64.6	56.0	66.2	57.2	66.6	59.2	65.9	61.7	64.4	65.0	20
22	51.7	43.4	53.3	44.6	53.6	46.6	53.0	48.9	51.5	52.2	22
24	41.7	33.6	43.2	34.8	43.6	36.7	43.0	39.0	41.6	42.2	24
26	33.6	25.7	35.1	26.9	35.5	28.8	34.9	31.1	33.6	34.2	26
28	27.0	19.3	28.5	20.4	28.9	22.3	28.3	24.6	27.0	27.7	28
30	21.5	13.9	23.0	15.1	23.4	16.9	22.8	19.1	21.6	22.2	30
32	16.8	9.3	18.3	10.5	18.7	12.3	18.2	14.5	16.9	17.5	32
34	12.8	5.4	14.3	6.5	14.7	8.4	14.2	10.6	12.9	13.6	34
36	9.3		10.8		11.2	5.0	10.7	7.1	9.5	10.1	36
38	6.2		7.7		8.1		7.7		6.5	7.1	38
40			5.0		5.4		5.0				40
吊钩	360t	360t	360t	360t	200t	200t	200t	200t	200t	200t	吊钩
倍率	16	15	14	13	12	12	12	11	9	9	倍率
组合	111122	221111	111222	222111	112222	222211	122222	222221	222222	333333	组合
风速	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	风速


T 92.4m
58.3
76.3
91.9
110.3
123.7
139.9
164.7
265
265
265
265
265
265
265
92.4
86.5
80.8
75.1
69.5
63.8
58.1
52.4
46.8
41.1
35.4
29.7
24.1
18.4
4.7
6.7
10.6
15.4
20.4
23.5
32.3
41.2
50.8
58
82.8
109.1
147.3
142.4
120m
110
100
90
80
70
60
50
40
30
20
10
0
10
20
30
40
50
60
70
80m

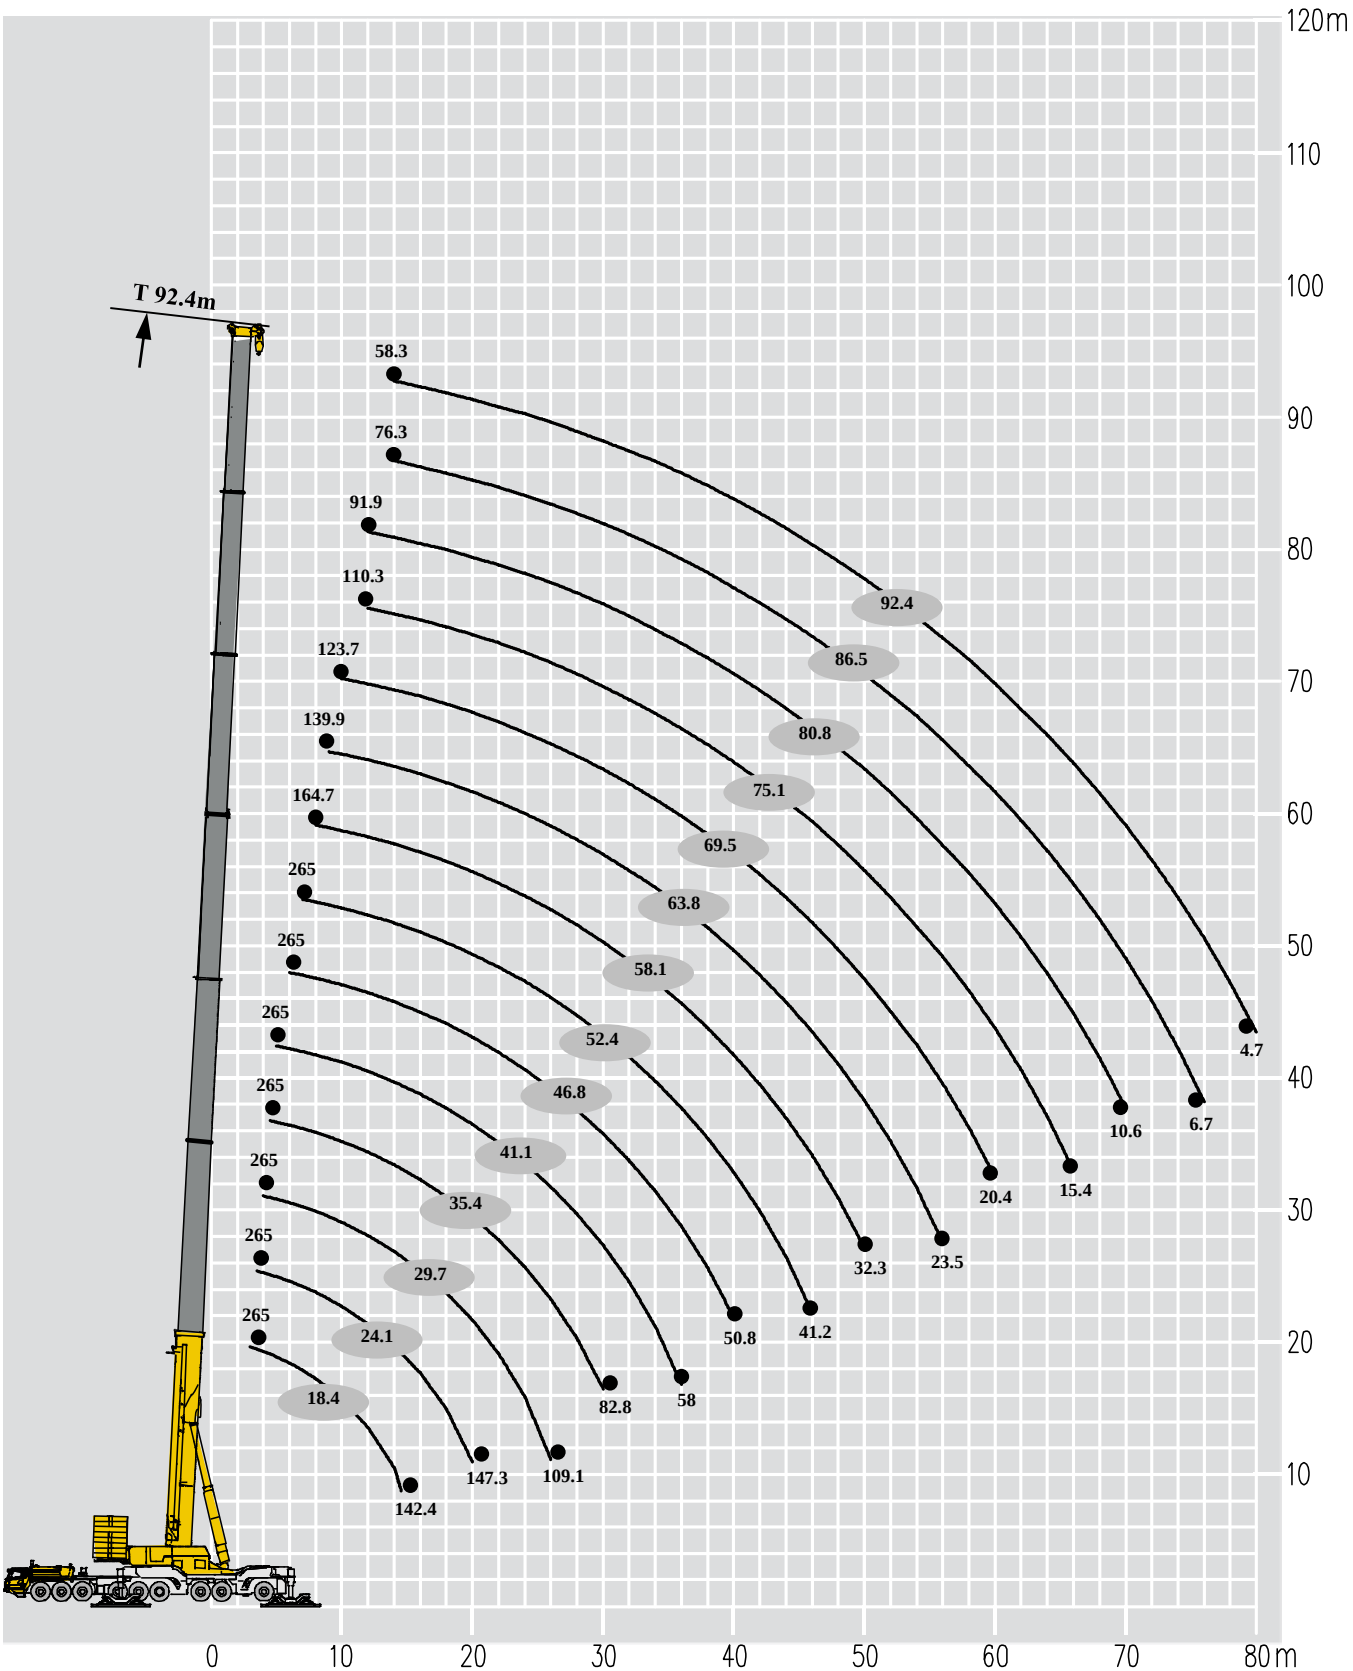起重性能表
Lifting capacities

T 18.4~52.4m










	18.4*	18.4m	24.1m	24.1m	29.7m	29.7m	35.4m	35.4m	41.1m	41.1m	46.8m	46.8m	52.4m	52.4m	
2	1600**														
2.5	320.0														
3	320.0	265.0													3
3.5	320.0	265.0	265.0	265.0											3.5
4	320.0	265.0	265.0	265.0	265.0	265.0									4
4.5	320.0	265.0	265.0	265.0	259.7	259.7	265.0	265.0							4.5
5	320.0	265.0	265.0	265.0	254.4	254.4	251.8	259.7	265.0	265.0					5
6	320.0	265.0	265.0	265.0	249.1	249.1	238.5	254.4	259.7	259.7	265.0	265.0			6
7	320.0	265.0	265.0	265.0	243.8	243.8	225.3	249.1	254.4	254.4	259.7	265.0	170.4	265.0	7
8	320.0	265.0	265.0	265.0	238.5	238.5	220.0	243.8	249.1	249.1	254.4	265.0	161.2	259.7	8
9	320.0	265.0	265.0	265.0	227.9	238.5	207.7	238.5	243.8	243.8	247.4	260.3	152.1	245.3	9
10	320.0	265.0	261.3	263.2	211.7	236.8	192.2	230.9	224.4	224.9	226.4	243.2	144.3	225.0	10
12	245.0	238.5	236.6	229.9	185.3	208.6	168.6	203.5	195.6	202.8	195.8	214.7	129.8	194.9	12
14	218.0	210.9	210.9	203.3	164.6	185.5	149.3	181.3	173.1	184.9	175.3	191.0	118.5	170.1	14
16	142.4	142.4	186.2	177.7	148.1	164.2	133.5	160.7	154.8	166.0	154.8	167.2	109.0	153.0	16
18			164.4	155.8	137.5	148.6	120.9	141.9	139.9	149.9	136.8	148.2	101.1	138.4	18
20			147.3	137.8	128.9	134.8	113.3	129.4	126.5	136.8	123.1	132.1	93.3	126.8	20
22					121.2	124.0	106.8	118.8	114.6	123.5	111.2	118.8	87.1	116.4	22
24					114.8	114.5	101.1	110.4	103.5	111.2	103.1	107.4	82.6	108.3	24
26					109.1	105.6	95.3	102.4	94.9	101.7	96.4	97.9	77.4	98.8	26
28							88.7	93.7	87.2	92.7	90.3	89.3	73.0	90.3	28
30							80.5	82.8	78.8	81.9	84.4	79.6	68.6	82.7	30
32									70.5	72.7	76.9	70.5	65.3	74.4	32
34									63.3	64.8	69.0	62.7	63.0	66.6	34
36									57.1	58.0	62.2	55.9	60.1	59.8	36
38											56.2	49.9	55.8	53.8	38
40											50.8	44.7	51.8	48.5	40
42													48.3	43.8	42
44													45.0	39.6	44
46													41.2	35.8	46
吊钩	360t	360t	360t	360t	360t	360t	360t	360t	360t	360t	360t	360t	200t	360t	吊钩
倍率	17	17	17	17	17	17	17	17	17	17	17	17	12	17	倍率
组合	000000	000000	000001	100000	000011	000110	000111	001110	001111	011110	011111	111110	011112	111111	组合
风速	14.1m/s	14.1m/s	12.8m/s	12.8m/s	12.8m/s	12.8m/s	11.1m/s	11.1m/s	11.1m/s	11.1m/s	11.1m/s	11.1m/s	11.1m/s	11.1m/s	风速

*正后方作业　　**参考吊重










	58.1m	58.1m	63.8m	63.8m	69.5m	69.5m	75.1m	75.1m	80.8m	80.8m	86.5m	92.4m	
8	163.9	164.7											8
9	155.3	150.6	126.4	139.9									9
10	147.6	136.8	120.5	131.1	105.0	123.7							10
12	134.7	117.1	109.4	116.2	95.3	110.4	89.4	110.3	85.4	91.9			12
14	123.5	101.7	100.6	103.2	86.5	99.1	81.5	97.9	79.4	84.0	76.3	58.3	14
16	114.1	88.4	91.5	93.3	79.4	89.0	75.4	86.7	73.5	76.4	70.0	56.5	16
18	106.1	79.8	84.2	84.0	73.3	79.7	68.6	77.2	68.4	70.4	64.4	54.0	18
20	98.9	72.7	78.3	75.3	68.0	71.5	63.5	68.9	63.3	63.5	59.3	50.6	20
22	92.5	66.3	72.6	67.5	63.5	64.4	58.4	61.9	58.6	57.1	54.2	47.9	22
24	87.0	60.5	68.3	61.4	59.2	58.1	54.2	56.9	53.8	52.1	49.3	44.1	24
26	82.3	55.9	64.0	55.6	54.7	52.8	51.0	52.1	49.6	47.7	45.2	41.0	26
28	79.7	53.3	59.9	51.1	51.2	48.0	47.7	48.0	45.2	43.9	41.9	38.1	28
30	76.8	50.9	56.6	46.7	48.9	43.6	44.3	44.9	40.6	40.5	38.5	35.6	30
32	73.9	48.6	53.3	43.2	45.7	40.5	41.2	40.8	37.0	37.2	35.5	33.6	32
34	68.3	46.7	50.4	40.4	43.4	37.7	39.0	38.5	35.9	34.9	33.1	31.7	34
36	62.8	45.0	48.2	37.6	41.2	35.2	36.8	35.0	34.7	32.7	30.9	29.7	36
38	56.8	42.5	45.9	35.1	38.9	33.3	34.5	32.6	33.4	30.9	29.3	27.8	38
40	51.6	39.1	43.7	33.7	36.7	30.5	32.8	29.8	31.9	28.9	28.0	26.2	40
42	46.9	36.1	41.4	31.9	35.5	28.5	31.1	27.5	29.0	27.0	26.1	24.7	42
吊钩	200t	200t	130t	200t	130t	130t	130t	130t	130t	130t	130t	130t	吊钩
倍率	12	13	9	11	7	9	6	7	6	6	5	5	倍率
组合	111112	211111	111122	221111	111222	222111	112222	222211	122222	222221	222222	333333	组合
风速	11.1m/s	11.1m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	风速



	58.1m	58.1m	63.8m	63.8m	69.5m	69.5m	75.1m	75.1m	80.8m	80.8m	86.5m	92.4m	
44	42.7	33.2	39.8	29.0	33.4	26.6	29.4	25.6	28.3	26.0	24.6	23.7	44
46	38.9	30.6	36.6	26.5	32.0	25.2	28.0	24.1	26.0	23.7	23.1	22.0	46
48	35.4	27.5	33.5	24.1	30.0	22.9	26.6	22.6	24.3	22.0	22.2	20.7	48
50	32.3	24.7	30.7	21.6	28.8	20.6	25.0	21.3	22.1	20.9	20.7	19.5	50
52			28.1	19.3	27.7	19.7	23.7	19.4	20.6	19.5	19.7	18.3	52
54			25.7	17.3	26.4	18.7	22.6	17.6	19.5	18.5	18.3	17.1	54
56			23.5	15.3	24.2	17.7	22.0	16.0	18.5	16.8	17.3	16.5	56
58					22.2	16.6	20.8	14.5	17.4	15.2	16.3	15.5	58
60					20.4	11.5	19.7	13.3	16.6	13.6	15.0	14.5	60
62							18.5	12.0	15.7	12.2	13.6	13.4	62
64							16.9	10.3	14.3	10.9	12.3	12.5	64
66							15.4	9.0	13.0	9.6	11.3	11.4	66
68									11.7	8.5	10.4	10.4	68
70									10.6	7.4	9.5	9.3	70
72											8.6	8.4	72
74											7.7	7.4	74
76											6.7	6.4	76
78												5.5	78
80												4.7	80
吊钩	200t	200t	130t	200t	130t	130t	130t	130t	130t	130t	130t	130t	吊钩
倍率	12	13	9	11	7	9	6	7	6	6	5	5	倍率
组合	111112	211111	111122	221111	111222	222111	112222	222211	122222	222221	222222	333333	组合
风速	11.1m/s	11.1m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	风速

起重性能表
Lifting capacities

T 18.4~52.4m




	18.4m	24.1m	24.1m	29.7m	29.7m	35.4m	35.4m	41.1m	41.1m	46.8m	46.8m	52.4m	52.4m	
3	265.0													3
3.5	265.0	265.0	265.0											3.5
4	265.0	265.0	265.0	265.0	265.0	265.0								4
4.5	265.0	265.0	265.0	259.7	259.7	251.8	265.0	265.0						4.5
5	265.0	265.0	265.0	254.4	254.4	238.5	259.7	259.7	265.0					5
6	265.0	265.0	265.0	249.1	249.1	225.3	254.4	254.4	259.7	265.0	265.0			6
7	265.0	265.0	265.0	243.8	243.8	220.0	249.1	249.1	254.4	259.7	265.0	170.4	265.0	7
8	265.0	265.0	265.0	238.5	238.5	207.7	243.8	243.8	249.1	254.4	265.0	161.2	259.7	8
9	265.0	265.0	265.0	227.9	238.5	192.2	238.5	224.4	243.8	247.4	251.8	152.1	245.3	9
10	263.2	260.3	254.6	211.7	236.8	168.6	230.9	195.6	224.9	226.4	232.8	144.3	225.0	10
12	222.3	221.4	212.8	185.3	208.6	149.3	203.5	173.1	202.8	195.8	196.7	129.8	193.8	12
14	188.1	189.1	180.5	164.6	185.3	133.5	180.5	154.8	174.8	173.9	169.1	118.5	167.2	14
16	142.4	164.4	155.8	148.1	161.5	120.9	157.7	139.9	153.0	152.0	147.3	109.0	147.3	16
18		144.4	131.3	137.5	141.6	113.3	138.7	126.5	134.9	134.9	130.2	101.1	130.2	18
20		119.5	105.3	126.0	122.1	106.8	123.0	114.6	119.7	119.7	115.9	93.3	115.9	20
22				106.0	102.3	101.1	103.2	103.5	102.0	106.5	99.4	87.1	103.7	22
24				90.4	86.8	92.7	87.7	92.6	86.6	91.0	84.1	82.6	88.3	24
26				77.8	74.2	80.2	75.3	80.1	74.3	78.6	71.8	77.4	75.9	26
28						70.0	65.2	69.9	64.2	68.4	61.8	71.7	65.8	28
30						61.4	56.6	61.4	55.7	59.9	53.4	63.2	57.4	30
32								54.2	48.6	52.8	46.4	56.0	50.3	32
34								48.0	42.4	46.6	40.3	49.8	44.2	34
36								42.6	37.1	41.2	35.0	44.4	38.8	36
38										36.5	30.3	39.7	34.2	38
40										32.4	26.2	35.6	30.1	40
42												31.9	26.4	42
44												28.5	23.1	44
46												25.5	20.2	46
吊钩	360t	360t	360t	360t	360t	360t	360t	360t	360t	360t	360t	200t	360t	吊钩
倍率	17	17	17	17	17	17	17	17	17	17	17	12	17	倍率
组合	000000	000001	100000	000011	000110	000111	001110	001111	011110	011111	111110	011112	111111	组合
风速	14.1m/s	12.8m/s	12.8m/s	12.8m/s	12.8m/s	11.1m/s	11.1m/s	11.1m/s	11.1m/s	11.1m/s	11.1m/s	11.1m/s	11.1m/s	风速

起重性能表
Lifting capacities

T 58.1~92.4m










	58.1m	58.1m	63.8m	63.8m	69.5m	69.5m	75.1m	75.1m	80.8m	80.8m	86.5m	92.4m	
8	163.9	164.7											8
9	155.3	150.6	126.4	139.9									9
10	147.6	136.8	120.5	131.1	105.0	123.7							10
12	134.7	117.1	109.4	116.2	95.3	110.4	89.4	110.3	85.4	91.9			12
14	123.5	101.7	100.6	103.2	86.5	99.1	81.5	97.9	79.4	84.0	76.3	58.3	14
16	114.1	88.4	91.5	93.3	79.4	89.0	75.4	86.7	73.5	76.4	70.0	56.5	16
18	106.1	79.8	84.2	84.0	73.3	79.7	68.6	77.2	68.4	70.4	64.4	54.0	18
20	98.9	72.7	78.3	75.3	68.0	71.5	63.5	68.9	63.3	63.5	59.3	50.6	20
22	92.5	66.3	72.6	67.5	63.5	64.4	58.4	61.9	58.6	57.1	54.2	47.9	22
24	87.0	60.5	68.3	61.4	59.2	58.1	54.2	56.9	53.8	52.1	49.3	44.1	24
26	79.2	55.9	64.0	55.6	54.7	52.8	51.0	52.1	49.6	47.7	45.2	41.0	26
28	69.0	53.3	59.9	51.1	51.2	48.0	47.7	48.0	45.2	43.9	41.9	38.1	28
30	60.6	50.9	56.6	46.7	48.9	43.6	44.3	44.9	40.6	40.5	38.5	35.6	30
32	53.4	48.2	55.2	43.2	45.7	40.5	41.2	40.8	37.0	37.2	35.5	33.6	32
34	47.2	42.1	49.0	40.4	43.4	37.7	39.0	38.5	35.9	34.9	33.1	31.7	34
36	41.9	36.8	43.7	36.3	41.2	35.2	36.8	35.0	34.7	32.7	30.9	29.7	36
38	37.2	32.2	39.0	31.7	38.9	32.1	34.5	32.6	33.4	30.9	29.3	27.8	38
40	33.1	28.1	34.9	27.6	35.6	28.0	32.8	29.2	31.9	28.9	28.0	26.2	40
42	29.4	24.5	31.2	24.0	31.9	24.4	31.1	25.6	29.0	27.0	26.1	24.7	42
吊钩	200t	200t	130t	200t	130t	130t	130t	130t	130t	130t	130t	130t	吊钩
倍率	12	13	9	11	7	9	6	7	6	6	5	5	倍率
组合	111112	211111	111122	221111	111222	222111	112222	222211	122222	222221	222222	333333	组合
风速	11.1m/s	11.1m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	风速










	58.1m	58.1m	63.8m	63.8m	69.5m	69.5m	75.1m	75.1m	80.8m	80.8m	86.5m	92.4m	
44	26.2	21.2	27.9	20.7	28.6	21.2	28.4	22.3	27.5	24.0	24.6	23.7	44
46	23.2	18.3	24.9	17.8	25.7	18.2	25.5	19.4	24.5	21.0	22.9	22.0	46
48	20.5	15.6	22.3	15.2	23.0	15.6	22.8	16.8	21.9	18.4	20.3	20.5	48
50	18.1	13.2	19.8	12.7	20.5	13.2	20.3	14.4	19.4	16.0	17.9	18.1	50
52			17.6	10.5	18.3	11.0	18.1	12.2	17.2	13.8	15.7	15.9	52
54			15.5	8.5	16.3	9.0	16.1	10.1	15.2	11.7	13.6	13.9	54
56			13.6	6.6	14.4	7.1	14.2	8.3	13.3	9.9	11.8	12.0	56
58					12.6	5.4	12.5	6.6	11.6	8.2	10.0	10.3	58
60					11.0	3.8	10.8	5.0	10.0	6.6	8.4	8.7	60
62							9.3	3.5	8.5	5.1	7.0	7.2	62
64							7.9	2.1	7.1	3.7	5.6	5.8	64
66							6.6		5.8	2.4	4.3	4.5	66
68									4.6	1.2	3.1	3.3	68
70									3.4		1.9	2.2	70
72												1.1	72
吊钩	200t	200t	130t	200t	130t	130t	130t	130t	130t	130t	130t	130t	吊钩
倍率	12	13	9	11	7	9	6	7	6	6	5	5	倍率
组合	111112	211111	111122	221111	111222	222111	112222	222211	122222	222221	222222	333333	组合
风速	11.1m/s	11.1m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	风速

起重性能表
Lifting capacities

T 18.4~52.4m










	18.4m	24.1m	24.1m	29.7m	29.7m	35.4m	35.4m	41.1m	41.1m	46.8m	46.8m	52.4m	52.4m	
3	265.0													3
3.5	265.0	265.0	265.0											3.5
4	265.0	265.0	265.0	265.0	265.0									4
4.5	265.0	265.0	265.0	259.7	259.7	265.0	265.0							4.5
5	265.0	265.0	265.0	254.4	254.4	251.8	259.7	265.0	265.0					5
6	265.0	265.0	265.0	249.1	249.1	238.5	254.4	259.7	259.7	265.0	265.0			6
7	265.0	265.0	265.0	243.8	243.8	225.3	249.1	254.4	254.4	259.7	265.0	170.4	265.0	7
8	265.0	265.0	265.0	238.5	238.5	220.0	243.8	249.1	249.1	252.7	248.9	161.2	243.2	8
9	259.4	256.5	248.0	227.9	238.5	207.7	238.5	236.6	232.8	228.0	224.2	152.1	220.4	9
10	232.8	231.8	223.3	211.7	225.2	192.2	218.5	214.7	211.9	208.1	204.3	144.3	200.5	10
12	192.9	193.8	184.3	185.3	189.1	168.6	183.4	181.5	177.7	175.8	172.0	129.8	170.1	12
14	144.7	159.9	142.8	163.4	161.5	149.3	156.8	155.8	152.0	151.1	147.3	118.5	146.3	14
16	105.2	120.3	104.6	127.1	122.8	129.6	123.7	129.4	122.2	127.4	119.2	109.0	124.1	16
18		93.8	79.0	100.3	96.3	102.8	97.2	102.5	95.8	100.7	93.0	101.1	97.6	18
20		74.7	60.5	81.2	77.3	83.5	78.2	83.3	76.9	81.6	74.2	85.2	78.7	20
22				66.7	63.1	69.1	63.9	69.0	62.8	67.3	60.2	70.8	64.5	22
24				55.5	51.9	57.9	52.9	57.7	51.7	56.1	49.2	59.5	53.4	24
26				46.4	42.9	48.9	43.9	48.8	42.9	47.2	40.5	50.5	44.6	26
28						41.5	36.6	41.4	35.6	39.9	33.3	43.2	37.3	28
30						35.3	30.5	35.3	29.6	33.8	27.3	37.0	31.3	30
32								30.1	24.5	28.6	22.2	31.8	26.1	32
34								25.6	20.0	24.2	17.9	27.4	21.7	34
36								21.6	16.2	20.3	14.1	23.5	17.9	36
38										16.9	10.7	20.1	14.6	38
40										13.9	7.8	17.1	11.6	40
42												14.4	9.0	42
44												12.0	6.6	44
46												9.8	4.5	46
吊钩	360t	360t	360t	360t	360t	360t	360t	360t	360t	360t	360t	200t	360t	吊钩
倍率	17	17	17	17	17	17	17	17	17	17	17	12	17	倍率
组合	000000	000001	100000	000011	000110	000111	001110	001111	011110	011111	111110	011112	111111	组合
风速	14.1m/s	12.8m/s	12.8m/s	12.8m/s	12.8m/s	11.1m/s	11.1m/s	11.1m/s	11.1m/s	11.1m/s	11.1m/s	11.1m/s	11.1m/s	风速

起重性能表
Lifting capacities

T 58.1~92.4m










	58.1m	58.1m	63.8m	63.8m	69.5m	69.5m	75.1m	75.1m	80.8m	80.8m	86.5m	92.4m	
8	163.9	164.7											8
9	155.3	150.6	126.4	139.9									9
10	147.6	136.8	120.5	131.1	105.0	123.7							10
12	134.7	117.1	109.4	116.2	95.3	110.4	89.4	110.3	85.4	91.9			12
14	123.5	101.7	100.6	103.2	86.5	99.1	81.5	97.9	79.4	84.0	76.3	58.3	14
16	114.1	88.4	91.5	93.3	79.4	89.0	75.4	86.7	73.5	76.4	70.0	56.5	16
18	101.3	79.8	84.2	84.0	73.3	79.7	68.6	77.2	68.4	70.4	64.4	54.0	18
20	82.2	72.7	78.3	75.3	68.0	71.5	63.5	68.9	63.3	63.5	59.3	50.6	20
22	67.9	62.1	69.9	61.5	63.5	61.9	58.4	61.9	58.6	57.1	54.2	47.9	22
24	56.7	51.1	58.7	50.5	59.2	50.9	54.2	52.3	53.8	52.1	49.3	44.1	24
26	47.8	42.4	49.7	41.7	50.5	42.2	50.2	43.5	49.2	45.2	45.2	41.0	26
28	40.5	35.2	42.4	34.5	43.1	35.0	42.9	36.2	41.8	38.0	40.1	38.1	28
30	34.4	29.1	36.2	28.5	37.0	29.0	36.8	30.2	35.7	32.0	34.0	34.3	30
32	29.3	24.1	31.1	23.5	31.8	23.9	31.6	25.1	30.6	26.8	28.9	29.1	32
34	24.8	19.7	26.6	19.1	27.4	19.6	27.1	20.8	26.1	22.5	24.5	24.7	34
36	21.0	15.9	22.8	15.4	23.5	15.8	23.3	17.0	22.3	18.7	20.6	20.9	36
38	17.6	12.6	19.4	12.1	20.1	12.5	19.9	13.7	18.9	15.3	17.3	17.6	38
40	14.7	9.7	16.4	9.1	17.2	9.6	16.9	10.8	16.0	12.4	14.4	14.6	40
42	12.0	7.1	13.8	6.5	14.5	7.0	14.3	8.2	13.3	9.8	11.7	12.0	42
44	9.6	4.7	11.4	4.2	12.1	4.6	11.9	5.8	11.0	7.5	9.4	9.6	44
46	7.5	2.6	9.3	2.1	10.0	2.5	9.8	3.7	8.8	5.3	7.3	7.5	46
48	5.6		7.3		8.1		7.8	1.8	6.9	3.4	5.3	5.6	48
50	3.8		5.5		6.3		6.1		5.2	1.7	3.6	3.9	50
52			3.9		4.7		4.5		3.6		2.0	2.3	52
54			2.4		3.2		3.0		2.1				54
56			1.1		1.8		1.6						56
58					0.6		0.4						58
吊钩	200t	200t	130t	200t	130t	130t	130t	130t	130t	130t	130t	130t	吊钩
倍率	12	13	9	11	7	9	6	7	6	6	5	5	倍率
组合	111112	211111	111122	221111	111222	222111	112222	222211	122222	222221	222222	333333	组合
风速	11.1m/s	11.1m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	风速


起重性能表
Lifting capacities

T 18.4~52.4m



	18.4m	24.1m	24.1m	29.7m	29.7m	35.4m	35.4m	41.1m	41.1m	46.8m	46.8m	52.4m	52.4m	
3	265.0													3
3.5	265.0	265.0	265.0											3.5
4	265.0	265.0	265.0	265.0	265.0									4
4.5	265.0	265.0	265.0	259.7	259.7	265.0	265.0							4.5
5	265.0	265.0	265.0	254.4	254.4	251.8	259.7	265.0	265.0					5
6	265.0	265.0	265.0	249.1	249.1	238.5	254.4	259.7	259.7	265.0	265.0			6
7	265.0	265.0	265.0	243.8	243.8	225.3	249.1	254.4	254.4	256.5	252.7	170.4	246.1	7
8	263.2	260.3	250.8	238.5	238.5	220.0	243.2	237.5	234.7	229.0	225.2	161.2	220.4	8
9	233.7	232.8	224.2	227.9	225.2	207.7	218.5	214.7	210.9	207.1	203.3	152.1	199.5	9
10	210.0	210.0	201.4	206.2	204.3	192.2	198.6	194.8	191.9	188.1	184.3	144.3	181.5	10
12	139.3	156.0	136.6	164.2	158.9	167.3	159.9	164.4	158.1	158.7	154.3	129.8	153.0	12
14	92.4	107.6	90.5	114.9	110.2	117.6	111.1	117.3	109.5	115.1	106.2	118.5	111.6	14
16	63.4	78.5	62.8	85.2	81.0	87.8	81.8	87.5	80.4	85.6	77.4	89.6	82.3	16
18		58.9	44.1	65.4	61.4	67.9	62.3	67.7	61.0	65.8	58.1	69.6	62.8	18
20		44.8	30.6	51.3	47.5	53.7	48.3	53.5	47.1	51.7	44.4	55.3	48.8	20
22				40.6	36.9	43.0	37.8	42.8	36.6	41.1	34.0	44.6	38.3	22
24				32.3	28.7	34.6	29.6	34.5	28.5	32.9	26.0	36.3	30.2	24
26				25.5	21.9	27.9	23.0	27.9	22.0	26.3	19.6	29.6	23.6	26
28						22.4	17.6	22.4	16.6	20.9	14.3	24.2	18.3	28
30						17.8	13.1	17.8	12.2	16.4	9.9	19.6	13.8	30
32								14.0	8.4	12.5	6.1	15.7	10.0	32
34								10.6	5.1	9.2	2.9	12.4	6.8	34
36								7.7	2.2	6.4	0.1	9.5	4.0	36
38										3.9		7.0	1.5	38
40										1.6		4.8		40
42												2.8		42
44												1.0		44
吊钩	360t	360t	360t	360t	360t	360t	360t	360t	360t	360t	360t	200t	360t	吊钩
倍率	17	17	17	17	17	17	17	17	17	17	17	12	17	倍率
组合	000000	000001	100000	000011	000110	000111	001110	001111	011110	011111	111110	011112	111111	组合
风速	14.1m/s	12.8m/s	12.8m/s	12.8m/s	12.8m/s	11.1m/s	11.1m/s	11.1m/s	11.1m/s	11.1m/s	11.1m/s	11.1m/s	11.1m/s	风速










	58.1m	58.1m	63.8m	63.8m	69.5m	69.5m	75.1m	75.1m	80.8m	80.8m	86.5m	92.4m	
8	163.9	164.7											8
9	155.3	150.6	126.4	139.9									9
10	147.6	136.8	120.5	131.1	105.0	123.7							10
12	134.7	117.1	109.4	116.2	95.3	110.4	89.4	110.3	85.4	91.9			12
14	115.9	101.7	100.6	103.2	86.5	99.1	81.5	97.9	79.4	84.0	76.3	58.3	14
16	86.2	79.6	88.5	78.8	79.4	79.3	75.4	80.9	73.5	76.4	70.0	56.5	16
18	66.5	60.2	68.6	59.5	69.5	60.0	68.6	61.4	68.0	63.5	64.4	54.0	18
20	52.3	46.4	54.4	45.7	55.3	46.1	55.0	47.6	53.8	49.5	51.8	50.6	20
22	41.7	36.0	43.7	35.3	44.6	35.8	44.3	37.1	43.2	39.0	41.3	41.5	22
24	33.5	27.9	35.4	27.3	36.2	27.7	36.0	29.0	34.9	30.9	33.0	33.3	24
26	26.9	21.4	28.8	20.8	29.6	21.2	29.3	22.5	28.2	24.3	26.5	26.7	26
28	21.5	16.1	23.4	15.5	24.1	16.0	23.9	17.2	22.8	19.0	21.1	21.3	28
30	17.0	11.7	18.8	11.1	19.6	11.5	19.3	12.8	18.3	14.5	16.6	16.8	30
32	13.2	8.0	15.0	7.4	15.7	7.8	15.5	9.1	14.5	10.8	12.8	13.0	32
34	9.9	4.8	11.7	4.2	12.4	4.6	12.2	5.8	11.2	7.5	9.5	9.8	34
36	7.1	2.0	8.8	1.4	9.6	1.8	9.3	3.1	8.4	4.7	6.7	7.0	36
38	4.6		6.3		7.1		6.8		5.9	2.3	4.2	4.5	38
40	2.4		4.1		4.9		4.6		3.7		2.0	2.3	40
42			2.1		2.9		2.7		1.7				42
44					1.1								44
吊钩	200t	200t	130t	200t	130t	130t	130t	130t	130t	130t	130t	130t	吊钩
倍率	12	13	9	11	7	9	6	7	6	6	5	5	倍率
组合	111112	211111	111122	221111	111222	222111	112222	222211	122222	222221	222222	333333	组合
风速	11.1m/s	11.1m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	风速











	18.4m	24.1m	24.1m	29.7m	29.7m	35.4m	35.4m	41.1m	41.1m	46.8m	46.8m	52.4m	52.4m	
3	265.0													3
3.5	265.0	265.0	265.0											3.5
4	265.0	265.0	265.0	265.0	265.0									4
4.5	265.0	265.0	265.0	259.7	259.7	265.0	265.0							4.5
5	265.0	265.0	265.0	254.4	254.4	251.8	259.7	265.0	265.0					5
6	265.0	265.0	265.0	249.1	249.1	238.5	254.4	259.7	258.1	250.9	247.3			6
7	258.1	254.5	246.4	243.8	243.8	225.3	236.5	231.0	227.4	222.0	218.4	170.4	213.0	7
8	226.5	224.7	216.6	219.3	217.5	213.0	210.3	205.8	203.1	198.6	194.9	161.2	191.3	8
9	192.9	200.4	188.6	196.7	194.9	192.2	188.6	185.9	182.3	179.6	175.1	152.1	172.4	9
10	133.8	153.2	130.3	162.7	156.5	166.3	157.6	165.8	155.4	162.5	150.9	144.3	157.0	10
12	74.4	90.3	71.9	98.0	93.0	101.0	93.9	100.6	92.2	98.3	88.6	103.0	94.4	12
14	44.4	58.8	42.5	65.7	61.3	68.3	62.1	68.0	60.6	65.9	57.4	70.1	62.5	14
16	25.5	39.8	24.9	46.2	42.2	48.6	43.0	48.4	41.6	46.5	38.7	50.3	43.4	16
18		27.0	12.9	33.2	29.4	35.5	30.2	35.3	28.9	33.6	26.2	37.2	30.6	18
20		17.8	4.3	23.9	20.2	26.1	21.1	26.0	19.9	24.3	17.3	27.7	21.5	20
22				16.8	13.3	19.1	14.2	18.9	13.1	17.3	10.6	20.7	14.7	22
24				11.3	7.9	13.6	8.8	13.5	7.7	11.9	5.4	15.2	9.3	24
26				6.8	3.5	9.2	4.5	9.1	3.5	7.6	1.2	10.8	5.1	26
28						5.5		5.5		4.0		7.1	1.6	28
30						2.4		2.5		1.1		4.1		30
32												1.6		32
吊钩	360t	360t	360t	360t	360t	360t	360t	360t	360t	360t	360t	200t	360t	吊钩
倍率	17	17	17	17	17	17	17	17	16	16	16	11	13	倍率
组合	000000	000001	100000	000011	000110	000111	001110	001111	011110	011111	111110	011112	111111	组合
风速	14.1m/s	12.8m/s	12.8m/s	12.8m/s	12.8m/s	11.1m/s	11.1m/s	11.1m/s	11.1m/s	11.1m/s	11.1m/s	11.1m/s	11.1m/s	风速










	58.1m	58.1m	63.8m	63.8m	69.5m	69.5m	75.1m	75.1m	80.8m	80.8m	86.5m	92.4m	
8	163.9	164.7											8
9	155.3	150.6	126.4	139.9									9
10	147.6	136.8	120.5	131.1	105.0	123.7							10
12	99.0	91.2	101.7	90.2	95.3	90.8	89.4	92.7	85.4	91.9			12
14	66.6	59.7	69.0	58.9	69.9	59.4	69.6	61.0	68.2	63.3	66.0	58.3	14
16	47.2	40.8	49.3	40.1	50.2	40.6	49.9	42.1	48.7	44.1	46.6	46.9	16
18	34.2	28.2	36.2	27.5	37.1	28.0	36.8	29.4	35.6	31.3	33.6	33.9	18
20	24.9	19.2	26.8	18.6	27.7	19.0	27.4	20.3	26.3	22.2	24.4	24.7	20
22	17.9	12.5	19.8	11.8	20.6	12.2	20.3	13.5	19.3	15.3	17.5	17.7	22
24	12.5	7.2	14.3	6.6	15.1	7.0	14.8	8.3	13.8	10.0	12.1	12.3	24
26	8.2	3.0	10.0	2.4	10.7	2.8	10.5	4.0	9.5	5.7	7.8	8.0	26
28	4.6		6.4		7.1		6.9		5.9	2.2	4.2	4.5	28
30	1.7		3.4		4.1		3.9		2.9		1.3	1.5	30
32					1.6		1.3						32
吊钩	200t	200t	130t	200t	130t	130t	130t	130t	130t	130t	130t	130t	吊钩
倍率	11	11	8	10	7	8	6	6	6	6	4	4	倍率
组合	111112	211111	111122	221111	111222	222111	112222	222211	122222	222221	222222	333333	组合
风速	11.1m/s	11.1m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	风速

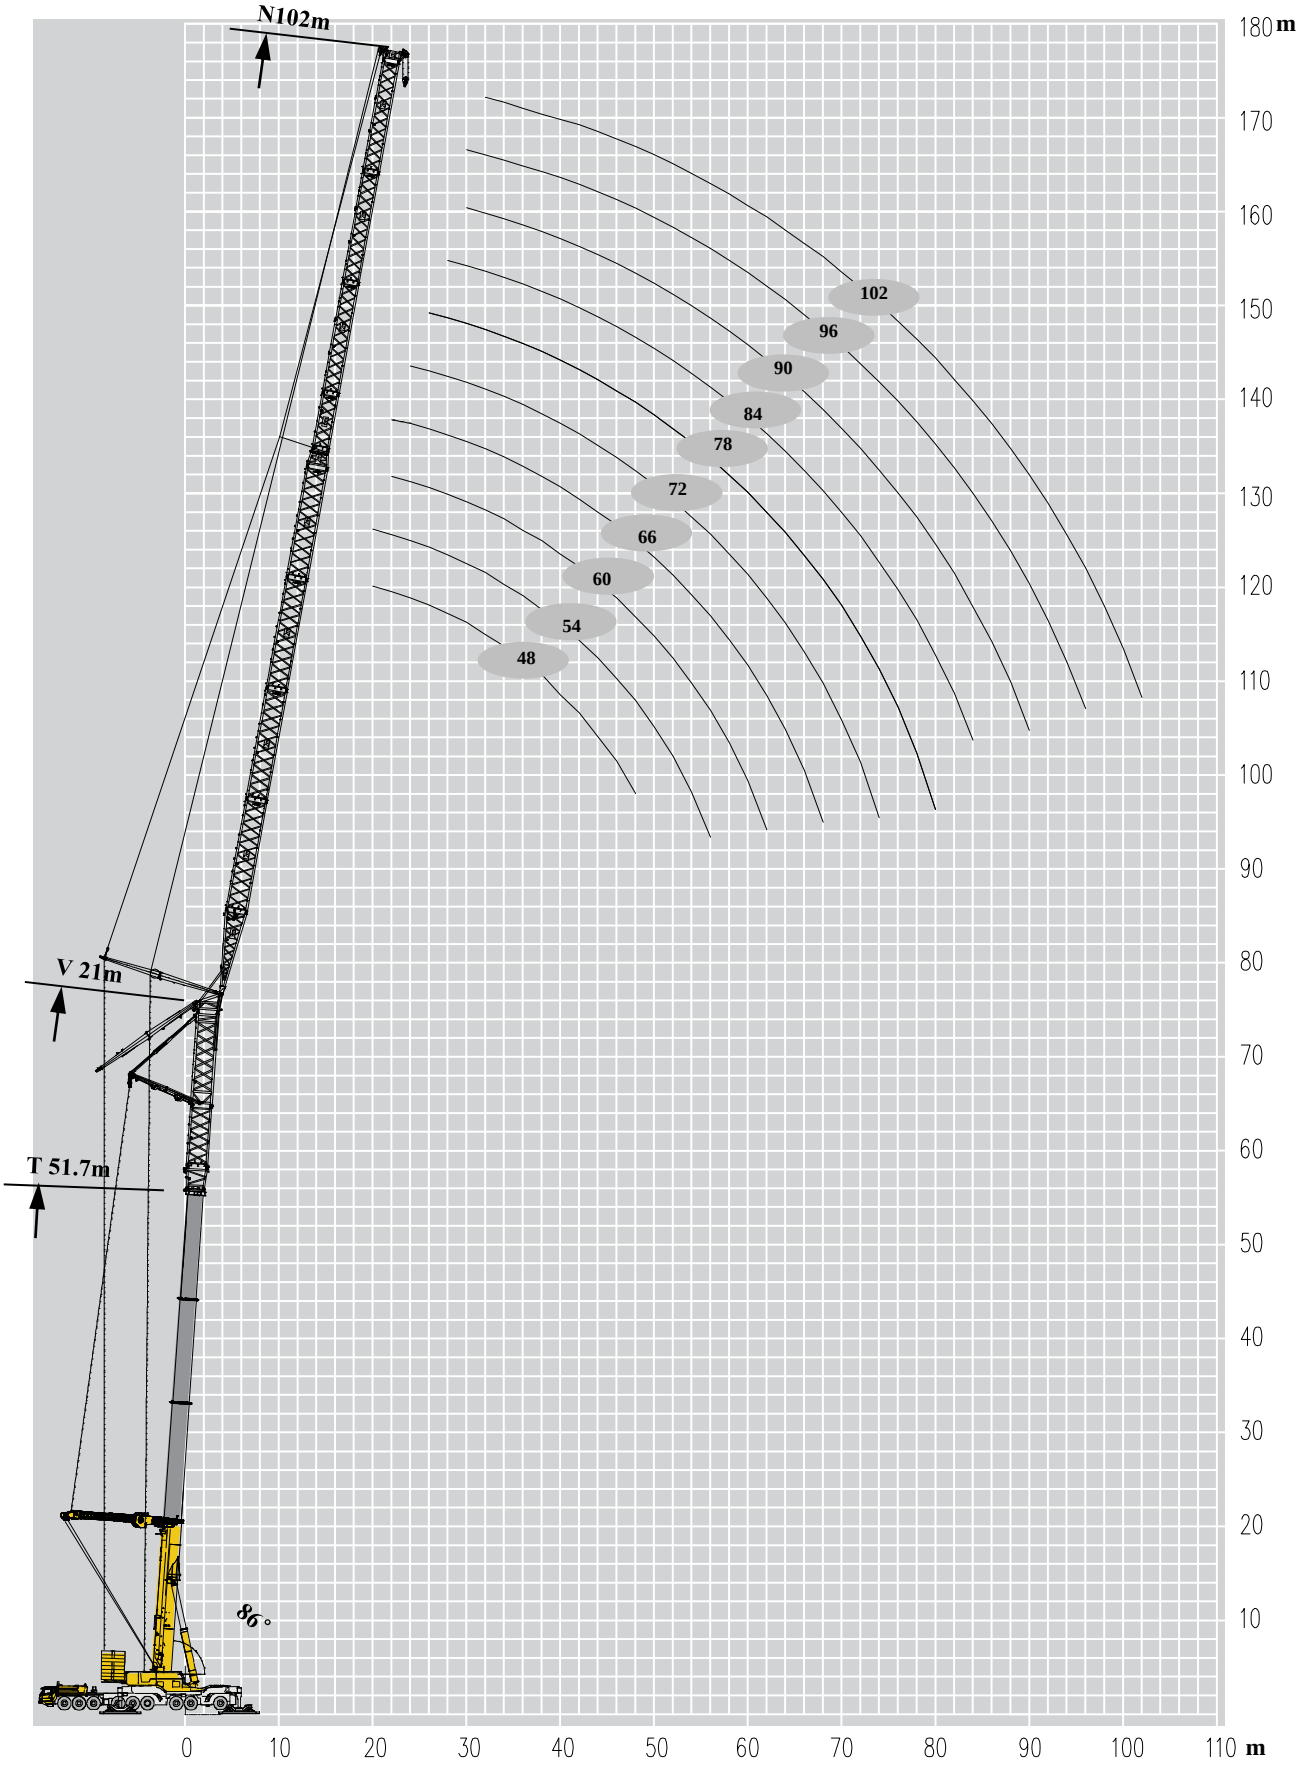
N102m
V 21m
T 51.7m
86°
102
96
90
84
78
72
66
60
54
48
180 m
170
160
150
140
130
120
110
100
90
80
70
60
50
40
30
20
10
0
10
20
30
40
50
60
70
80
90
100
110 m

起重性能表
Lifting capacities


T 29~51.7m



	48m					
	29m	**34.7m**	**40.3m**	**46m**	**51.7m**	
14						14
16	134.0	135.8				16
18	124.5	125.3	126.4	126.8		18
20	108.6	121.5	122.4	123.8	124.3	20
22	100.8	112.6	114.5	116.7	119.7	22
24	93.6	105.4	107.8	108.9	111.6	24
26	87.1	98.2	101.2	103.0	105.3	26
28	82.2	93.7	96.8	97.6	99.0	28
30	76.2	86.4	89.9	91.5	92.7	30
32	71.7	81.9	85.4	86.7	87.3	32
34	67.1	77.3	79.5	80.7	81.9	34
36	63.2	72.7	75.4	76.3	77.4	36
38	60.2	68.2	71.5	72.4	72.9	38
40	53.2	62.0	65.6	67.9	69.3	40
42	51.0	58.2	59.4	61.4	62.1	42
44	48.3	49.0	49.7	50.8	51.5	44
46	47.6	46.4	47.3	48.1	50.4	46
48	46.5	44.3	45.1	46.2	48.3	48
50			42.1	43.1	44.1	50
组合C	110	111	211	221	222	组合C
倍率	8	9	8	8	8	倍率
吊钩重量	5.9t	5.9t	5.4t	5.4t	5.4t	吊钩重量
吊钩	200t	200t	130t	130t	130t	吊钩
风速	10m/s	10m/s	10m/s	10m/s	10m/s	风速

起重性能表
Lifting capacities

T 29~51.7m



	54m					60m					
	29m	34.7m	40.3m	46m	51.7m	29m	34.7m	40.3m	46m	51.7m	
16	134.0	135.8									16
18	122.4	122.8	123.3	123.3		124.9	129.8	129.9			18
20	108.6	114.3	116.5	118.7	123.1	108.8	109.7	111.0	122.2		20
22	100.8	106.7	107.3	108.1	119.7	105.7	106.3	107.5	108.7	121.2	22
24	93.6	102.2	103.8	104.1	109.8	96.7	97.8	98.6	99.1	105.6	24
26	87.1	98.2	99.4	100.4	102.6	93.6	94.3	94.9	95.6	99.9	26
28	82.2	93.7	94.5	95.3	96.3	87.1	89.7	91.4	92.5	94.5	28
30	76.2	86.4	89.9	90.3	90.9	82.2	84.5	86.7	87.6	89.1	30
32	71.7	81.9	83.4	84.0	84.6	76.2	80.8	81.4	82.2	82.8	32
34	67.1	77.3	78.6	79.6	80.1	71.7	75.3	76.9	77.4	78.3	34
36	63.2	72.7	74.1	74.9	75.6	67.1	71.4	72.2	73.0	73.8	36
38	60.2	68.2	69.3	70.4	71.1	63.2	64.5	65.6	67.9	69.3	38
40	53.2	62.0	65.6	67.0	67.5	60.2	63.4	64.4	65.0	65.7	40
42	51.0	58.2	59.4	61.2	62.1	53.2	60.3	61.2	61.9	62.1	42
44	48.3	49.0	49.7	50.8	51.5	51.0	55.8	57.8	58.4	59.4	44
46	45.2	46.4	47.3	48.1	50.4	48.3	49.0	49.7	50.8	51.5	46
48	42.7	44.3	45.1	46.2	48.3	45.2	46.4	47.3	48.1	50.4	48
50	40.4	41.2	42.1	43.1	44.1	42.7	44.3	45.1	46.2	48.3	50
52	39.0	39.7	40.8	42.4	43.5	40.4	41.2	42.1	43.1	44.1	52
54	37.6	37.9	38.4	40.3	41.8	39.0	39.7	40.8	42.4	43.5	54
56				38.4	40.2	37.6	37.9	38.4	40.3	41.8	56
58						34.3	35.4	36.3	38.4	40.2	58
60							33.6	34.7	35.5	37.4	60
62										34.6	62
组合C	110	111	211	221	222	110	111	211	221	222	组合C
倍率	8	9	8	8	8	8	8	8	7	7	倍率
吊钩重量	5.9t	5.9t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	吊钩重量
吊钩	200t	200t	130t	130t	130t	130t	130t	130t	130t	130t	吊钩
风速	10m/s	10m/s	10m/s	10m/s	10m/s	10m/s	10m/s	10m/s	10m/s	10m/s	风速

起重性能表
Lifting capacities

T 29~51.7m




	66m					72m					
	29m	34.7m	40.3m	46m	51.7m	29m	34.7m	40.3m	46m	51.7m	
18	110.3	120.8									18
20	104.9	109.7	120.2			101.1					20
22	95.2	98.7	105.3	113.2	120.0	94.8	111.4	111.6			22
24	90.8	96.5	97.8	101.6	105.6	85.5	91.1	92.4	103.3	111.4	24
26	86.4	87.6	88.9	90.9	98.1	81.1	88.7	90.1	91.1	93.4	26
28	80.1	86.6	87.3	88.0	92.7	76.7	80.7	81.9	83.5	90.9	28
30	75.6	84.5	85.0	85.6	86.4	72.2	79.7	80.5	81.2	84.6	30
32	71.1	77.3	78.1	79.5	81.0	67.7	76.6	77.8	78.6	80.1	32
34	66.6	73.4	74.5	75.9	76.5	65.2	73.4	74.5	74.6	74.7	34
36	62.0	68.6	69.4	70.8	72.0	61.0	68.7	69.2	69.7	70.2	36
38	59.8	64.5	65.6	67.9	68.4	58.5	65.0	65.4	66.0	66.6	38
40	57.5	62.1	63.4	63.7	63.9	54.2	61.4	62.0	62.5	63.0	40
42	53.0	60.3	60.7	60.8	61.2	51.7	58.4	58.9	59.0	59.4	42
44	50.7	55.8	56.0	56.4	57.6	49.4	54.3	55.4	56.0	56.7	44
46	48.3	49.0	49.7	50.8	51.5	47.1	51.1	52.2	52.7	53.1	46
48	43.5	46.4	47.3	48.1	50.4	44.8	49.0	49.7	50.0	50.4	48
50	41.4	44.3	45.1	46.2	46.8	42.6	46.4	47.3	48.1	48.6	50
52	39.5	41.2	42.1	43.1	44.1	38.0	44.3	45.1	45.7	45.9	52
54	39.0	39.7	40.8	42.4	42.5	38.0	41.2	41.4	41.6	41.7	54
56	37.0	37.9	38.4	40.3	40.8	35.8	38.7	39.4	39.7	40.0	56
58	34.3	35.4	36.3	38.4	39.1	33.7	36.3	36.7	37.0	37.4	58
60	32.1	33.6	34.7	35.5	37.4	32.5	34.0	34.9	35.3	35.7	60
62	30.8	31.4	32.4	33.2	34.6	30.5	33.6	34.7	34.8	34.9	62
64	29.3	29.9	30.9	31.6	32.4	30.2	31.4	32.4	33.0	33.2	64
66	27.7	27.6	28.5	29.4	31.0	28.4	29.9	30.9	31.2	31.5	66
68				27.2	29.6	26.3	27.6	28.1	29.4	30.6	68
70						24.4	25.2	26.1	27.2	28.6	70
72								24.2	25.8	26.7	72
74										24.9	74
组合C	110	111	211	221	222	110	111	211	221	222	组合C
倍率	7	7	7	6	7	6	6	6	6	6	倍率
吊钩重量	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	吊钩重量
吊钩	130t	130t	130t	130t	130t	130t	130t	130t	130t	130t	吊钩
风速	10m/s	10m/s	10m/s	10m/s	10m/s	10m/s	10m/s	10m/s	10m/s	10m/s	风速

起重性能表
Lifting capacities

T 29~51.7m













	78m					84m					
	29m	34.7m	40.3m	46m	51.7m	29m	34.7m	40.3m	46m	51.7m	
22	89.2	99.1									22
24	84.9	91.3	111.2			80.4	93.4				24
26	76.1	82.3	84.5	95.2	110.9	78.2	83.2	99.0	103.0		26
28	73.6	81.7	82.7	83.6	93.1	69.9	78.0	84.5	85.0	110.0	28
30	69.6	75.1	76.4	77.0	82.8	67.7	74.3	74.8	75.3	88.0	30
32	65.1	72.2	73.5	74.4	78.3	64.0	71.8	72.4	72.8	76.5	32
34	62.4	69.1	70.4	71.6	72.9	61.1	68.2	69.5	70.7	71.1	34
36	60.2	66.4	67.3	68.0	68.4	57.4	65.3	66.4	67.0	67.5	36
38	56.3	61.8	62.4	63.4	64.8	54.3	61.5	62.4	62.7	63.0	38
40	53.5	60.3	60.7	61.0	61.2	52.1	57.4	58.7	59.0	59.4	40
42	51.2	56.8	56.9	57.3	57.6	49.9	55.3	56.1	56.4	56.7	42
44	49.0	52.4	53.3	54.0	54.9	47.6	52.2	52.7	52.9	53.1	44
46	46.7	51.7	51.9	52.0	52.2	45.4	49.6	49.9	50.2	50.4	46
48	44.4	49.0	49.2	49.4	49.5	43.1	45.5	46.7	47.0	47.7	48
50	42.1	46.0	46.2	46.5	46.8	40.8	43.5	44.3	44.8	45.0	50
52	39.8	43.4	43.7	43.8	44.1	38.5	42.2	42.5	42.8	43.2	52
54	35.4	40.4	40.8	41.7	42.3	36.2	40.8	41.0	41.2	41.4	54
56	33.2	36.6	37.4	38.0	38.3	33.9	37.4	37.8	38.2	38.7	56
58	33.0	35.4	35.8	36.3	36.6	33.2	35.5	36.0	36.4	36.9	58
60	31.0	34.6	34.8	34.9	34.9	29.8	32.4	33.0	33.1	33.2	60
62	29.8	32.1	32.5	32.8	33.2	28.5	31.8	32.0	32.1	32.3	62
64	27.7	30.5	30.8	31.1	31.5	27.4	29.8	30.4	30.5	30.6	64
66	27.7	30.2	30.3	30.4	30.5	26.3	27.4	28.0	28.7	28.9	66
68	26.6	28.8	29.2	29.8	28.9	25.2	26.5	27.8	28.1	28.1	68
70	25.4	25.2	28.1	28.1	28.1	24.1	25.0	25.1	25.6	26.4	70
72	24.4	23.9	24.1	26.2	26.3	23.0	23.5	24.0	24.5	25.5	72
74	22.3	23.7	24.1	25.5	25.5	23.0	21.8	22.0	22.4	22.7	74
76	21.4	22.2	22.2	22.9	24.6	20.8	21.3	22.0	22.5	22.8	76
78			22.0	22.2	22.3	20.8	19.4	19.8	20.5	22.1	78
80					19.8	20.4	19.2	20.5	20.6	20.7	80
82						17.6	18.1	18.5	19.0	19.8	82
84								16.2	18.4	18.5	84
86											86
组合C	110	111	211	221	222	110	111	211	221	222	组合C
倍率	6	6	6	5	6	5	6	5	5	7	倍率
吊钩重量	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	吊钩重量
吊钩	130t	130t	130t	130t	130t	130t	130t	130t	130t	130t	吊钩
风速	10m/s	10m/s	10m/s	10m/s	10m/s	10m/s	10m/s	10m/s	10m/s	10m/s	风速

起重性能表
Lifting capacities

T 29~51.7m



	90m					96m					
	29m	34.7m	40.3m	46m	51.7m	29m	34.7m	40.3m	46m	51.7m	
24	70.8	78.1									24
26	68.7	74.2	79.1			63.6					26
28	62.9	72.3	73.0	79.0		61.4	69.6	71.2			28
30	60.8	69.5	70.5	71.4	78.9	56.1	66.4	67.0	67.5	67.7	30
32	58.6	67.0	68.0	68.8	71.4	55.1	63.3	64.7	65.5	66.5	32
34	56.5	66.3	66.7	66.8	70.2	54.2	61.1	62.8	63.1	64.3	34
36	54.3	62.3	63.4	64.6	65.7	51.9	59.0	59.4	60.9	63.9	36
38	52.1	60.1	60.7	61.0	61.2	49.7	56.8	58.4	59.4	60.3	38
40	48.7	57.4	58.4	58.5	58.5	47.5	54.6	55.0	55.8	56.7	40
42	45.3	53.3	53.7	54.1	54.9	45.3	52.5	52.7	52.9	53.1	42
44	43.0	51.1	51.2	51.3	51.3	43.1	50.2	50.3	50.4	50.4	44
46	40.8	48.0	48.2	48.4	48.6	40.8	46.2	46.5	47.2	47.7	46
48	38.5	45.5	45.6	45.8	45.9	38.6	44.3	44.6	44.8	45.0	48
50	36.2	43.5	43.8	44.1	44.1	36.3	41.5	42.0	42.2	42.3	50
52	35.2	41.0	41.2	41.3	41.4	34.0	39.4	39.9	40.5	40.5	52
54	34.0	38.1	38.4	38.9	39.6	31.6	37.1	37.4	37.7	37.8	54
56	31.6	37.4	37.6	37.7	37.8	30.4	35.1	35.4	35.7	36.0	56
58	30.0	35.5	36.0	36.0	36.0	29.5	33.1	33.7	34.0	34.2	58
60	28.9	32.4	33.0	33.1	33.2	27.6	32.3	32.3	32.4	32.4	60
62	25.5	31.2	31.5	32.1	32.3	25.9	30.0	30.4	31.5	31.5	62
64	24.8	28.4	28.9	28.9	28.9	24.8	28.0	29.1	29.7	29.7	64
66	23.3	27.4	28.0	28.1	28.1	23.6	26.2	26.8	27.1	27.6	66
68	22.6	25.4	25.7	26.4	26.4	21.3	24.8	25.1	25.3	25.5	68
70	21.9	25.0	25.1	25.5	25.5	20.7	22.3	22.7	23.2	23.8	70
72	20.8	23.3	23.5	23.8	23.8	19.6	20.4	21.0	21.6	22.1	72
74	19.7	21.5	21.6	21.8	22.3	18.5	19.7	21.1	21.2	22.1	74
76	19.4	20.3	20.4	20.5	21.9	18.1	19.1	19.4	19.9	20.4	76
78	18.5	19.4	19.8	20.2	20.4	17.4	18.5	19.0	19.6	19.6	78
80	17.4	19.2	19.6	19.6	19.6	15.4	17.6	18.7	18.7	18.7	80
82	17.3	17.7	18.0	18.5	18.7	14.9	15.3	15.8	16.3	17.9	82
84	15.2	16.0	16.2	16.4	16.6	14.9	15.0	15.9	15.9	17.0	84
86	15.2	15.2	16.0	16.2	16.4	13.0	13.7	15.3	15.5	15.8	86
88	14.8	15.1	14.9	15.9	16.0	12.8	12.8	13.8	13.8	14.5	88
90			13.5	13.9	14.6	12.8	12.0	12.7	13.5	13.7	90
92						10.6	10.9	11.7	11.7	11.8	92
94							10.7	11.7	11.7	11.7	94
									10.6	11.6	96
组合C	110	111	211	221	222	110	111	211	221	222	组合C
倍率	5	5	5	5	5	4	4	5	4	4	倍率
吊钩重量	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	吊钩重量
吊钩	130t	130t	130t	130t	130t	130t	130t	130t	130t	130t	吊钩
风速	10m/s	10m/s	10m/s	10m/s	10m/s	10m/s	10m/s	10m/s	10m/s	10m/s	风速

起重性能表
Lifting capacities

T 29~51.7m



	102m					
	29m	34.7m	40.3m	46m	51.7m	
26	60.5					26
28	58.3	63.7				28
30	53.1	63.4	67.0			30
32	51.0	57.8	58.3	58.6	66.5	32
34	48.8	55.7	56.7	60.7	64.3	34
36	47.5	53.6	55.3	57.3	62.1	36
38	46.9	53.6	54.3	55.8	58.5	38
40	44.6	51.6	53.6	54.1	54.9	40
42	42.4	49.4	52.1	52.2	52.2	42
44	40.2	47.2	47.9	48.2	48.6	44
46	37.9	44.9	45.2	45.6	45.9	46
48	35.7	42.7	43.0	43.1	43.2	48
50	33.4	40.4	41.0	41.4	41.4	50
52	31.7	38.2	38.5	38.6	38.7	52
54	31.2	36.3	36.5	36.7	36.9	54
56	28.8	35.1	35.1	35.1	35.1	56
58	27.2	33.1	33.2	33.3	33.3	58
60	26.7	31.3	31.4	31.5	31.5	60
62	24.6	29.0	29.4	29.7	29.7	62
64	23.5	27.3	27.6	27.8	27.9	64
66	22.3	24.6	26.1	26.9	27.0	66
68	21.2	24.7	25.1	25.2	25.2	68
70	20.0	22.3	22.7	23.2	23.8	70
72	18.3	20.2	21.0	21.6	22.1	72
74	17.4	19.7	19.9	20.4	20.4	74
76	16.2	19.1	19.4	19.6	19.6	76
78	15.6	17.0	17.6	18.0	18.7	78
80	13.9	16.5	16.7	16.9	17.0	80
82	13.1	14.9	15.0	15.0	15.0	82
84	13.1	13.4	13.6	14.0	15.1	84
86	11.7	12.7	13.0	14.0	14.5	86
88	11.1	12.0	12.2	12.4	13.0	88
90	10.3	10.6	10.9	11.9	12.8	90
92	10.3	10.3	11.0	11.7	11.8	92
94	9.2	9.5	9.6	9.8	10.9	94
96	8.7	8.8	8.9	9.8	10.9	96
98	8.4	8.5	8.9	9.0	9.0	98
100		7.4	7.5	7.7	8.8	100
102				5.6	5.8	102
组合C	110	111	211	221	222	组合C
倍率	4	4	4	4	4	倍率
吊钩重量	5.4t	5.4t	5.4t	5.4t	5.4t	吊钩重量
吊钩	130t	130t	130t	130t	130t	吊钩
风速	10m/s	10m/s	10m/s	10m/s	10m/s	风速

起重性能表
Lifting capacities

T 29~51.7m




	48m					
	29m	**34.7m**	**40.3m**	**46m**	**51.7m**	
14						14
16	97.7	99.0				16
18	90.8	91.3	92.1	92.4		18
20	79.2	86.3	86.9	88.4	90.6	20
22	73.5	78.8	80.1	80.6	85.3	22
24	68.3	76.9	77.1	77.7	80.0	24
26	63.5	71.6	73.8	74.4	74.8	26
28	59.9	68.3	68.9	69.3	69.5	28
30	55.6	63.0	63.4	64.6	65.0	30
32	52.3	59.7	60.1	60.7	61.0	32
34	46.2	53.2	54.8	55.8	57.1	34
36	43.5	50.0	50.9	51.4	53.8	36
38	41.4	47.0	47.4	48.0	48.3	38
40	38.8	43.4	44.1	45.0	45.9	40
42	37.2	40.7	41.6	42.4	43.4	42
44	35.2	35.7	36.2	37.0	37.6	44
46	33.0	33.8	34.5	35.1	36.8	46
48	32.0	32.3	32.9	33.7	35.2	48
50			30.7	31.4	31.7	50
组合C	110	111	211	221	222	组合C
倍率	6	6	6	6	6	倍率
吊钩重量	5.4t	5.4t	5.4t	5.4t	5.4t	吊钩重量
吊钩	130t	130t	130t	130t	130t	吊钩
风速	10m/s	10m/s	10m/s	10m/s	10m/s	风速

起重性能表
Lifting capacities

T 29~51.7m














	54m					60m					
	29m	34.7m	40.3m	46m	51.7m	29m	34.7m	40.3m	46m	51.7m	
16	97.7	99.0									16
18	89.2	89.5	89.9	89.9		91.1	99.0	99.7			18
20	79.2	83.3	84.9	86.5	89.6	79.3	80.0	80.9	81.8		20
22	73.5	75.7	78.2	78.8	87.3	77.1	77.5	78.4	79.2	81.8	22
24	68.3	74.5	75.7	75.9	78.7	70.5	71.3	71.9	72.2	76.8	24
26	63.5	70.1	71.0	71.7	72.8	68.3	68.7	69.2	69.7	71.5	26
28	59.9	66.6	67.6	68.0	68.2	63.5	64.5	65.4	65.6	66.3	28
30	55.6	60.9	62.5	63.2	63.6	59.9	61.6	62.0	62.2	62.3	30
32	52.3	56.9	58.1	59.0	59.7	55.6	57.0	58.1	58.3	58.4	32
34	48.9	52.9	54.0	54.6	55.8	52.3	52.2	53.2	53.7	54.5	34
36	46.1	49.2	49.7	50.9	52.5	48.9	49.2	50.1	51.1	51.8	36
38	43.9	45.4	46.7	47.7	49.9	46.1	47.0	47.8	48.1	48.6	38
40	38.8	42.4	43.3	44.4	44.6	43.9	43.8	44.9	45.4	45.9	40
42	37.2	40.6	41.6	41.9	42.1	38.8	42.8	43.3	43.7	44.0	42
44	35.2	35.7	36.2	37.0	37.6	37.2	38.4	39.3	39.7	41.3	44
46	33.0	33.8	34.5	35.1	36.8	35.2	35.7	36.2	37.0	37.2	46
48	31.1	32.3	32.9	33.7	35.2	33.0	33.8	34.5	35.1	35.3	48
50	29.5	30.0	30.7	31.4	32.1	31.1	32.3	32.9	33.2	33.5	50
52	28.4	28.9	29.7	30.9	31.7	29.5	30.0	30.7	31.4	32.1	52
54	27.4	27.6	28.0	29.4	30.5	28.4	28.9	29.7	30.9	31.0	54
56				28.0	29.3	27.4	27.6	28.0	28.8	29.1	56
						25.0	25.8	26.5	27.5	27.9	58
							24.5	25.3	25.9	27.3	60
										25.2	62
组合C	110	111	211	221	222	110	111	211	221	222	组合C
倍率	6	6	6	6	6	6	6	6	5	5	倍率
吊钩重量	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	吊钩重量
吊钩	130t	130t	130t	130t	130t	130t	130t	130t	130t	130t	吊钩
风速	10m/s	10m/s	10m/s	10m/s	10m/s	10m/s	10m/s	10m/s	10m/s	10m/s	风速

起重性能表
Lifting capacities

T 29~51.7m















	66m					72m					
	29m	34.7m	40.3m	46m	51.7m	29m	34.7m	40.3m	46m	51.7m	
18	79.7	84.2									
20	72.4	80.0	80.9			72.3					20
22	69.4	72.0	73.2	74.8	80.8	69.1	72.2	72.2			22
24	66.2	70.3	71.3	71.9	75.5	62.3	66.4	67.4	68.3	72.2	24
26	63.0	63.9	64.8	66.3	70.2	59.1	64.7	65.7	66.4	68.1	26
28	58.4	63.1	63.6	64.1	65.0	55.9	58.8	59.7	60.9	63.6	28
30	55.1	61.6	62.0	61.7	61.0	52.6	58.1	58.7	59.2	59.7	30
32	51.9	56.4	56.9	57.7	57.1	49.4	55.8	56.7	56.4	55.8	32
34	48.6	53.5	54.3	54.5	53.8	47.6	51.4	51.8	52.2	52.5	34
36	45.2	50.0	50.6	51.2	50.5	44.5	48.2	48.5	48.8	49.2	36
38	43.6	47.0	47.8	47.9	47.2	42.6	45.4	45.6	46.0	46.6	38
40	41.9	45.3	45.9	45.3	44.6	39.5	42.9	43.2	43.6	44.0	40
42	38.6	44.0	43.3	43.3	42.6	37.7	39.9	40.3	40.9	41.3	42
44	34.9	39.7	39.0	38.4	40.0	36.0	38.4	38.9	39.1	39.4	44
46	33.3	35.7	36.2	36.6	35.9	34.4	36.9	37.3	37.3	37.4	46
48	31.7	33.8	34.5	34.7	34.1	32.7	34.3	34.7	35.1	35.4	48
50	30.2	32.3	32.9	32.8	32.8	29.3	30.8	31.0	31.3	31.6	50
52	28.8	30.0	30.7	31.4	31.0	27.7	29.5	29.9	30.1	30.4	52
54	28.4	28.9	29.7	30.4	29.7	27.7	27.8	28.2	28.4	28.5	54
56	26.9	27.6	28.0	28.5	28.5	26.1	26.6	26.7	27.1	27.3	56
58	25.0	25.8	26.5	27.3	27.3	24.6	25.4	25.7	25.9	26.0	58
60	23.4	24.5	25.3	25.9	26.0	23.7	24.1	24.1	24.5	24.8	60
62	22.5	22.9	23.6	24.2	24.8	22.3	22.5	22.9	23.5	24.2	62
64	21.4	21.8	22.5	23.0	23.5	22.0	22.3	22.5	22.7	22.9	64
66	20.2	20.1	20.8	21.4	22.6	20.7	21.1	21.2	21.5	21.7	66
68				19.8	21.6	19.2	20.1	20.5	20.9	21.1	68
						17.8	18.4	19.0	19.8	19.8	70
								17.6	18.8	19.2	72
										18.2	74
组合C	110	111	211	221	222	110	111	211	221	222	组合C
倍率	5	5	5	5	5	5	5	5	4	5	倍率
吊钩重量	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	吊钩重量
吊钩	130t	130t	130t	130t	130t	130t	130t	130t	130t	130t	吊钩
风速	10m/s	10m/s	10m/s	10m/s	10m/s	10m/s	10m/s	10m/s	10m/s	10m/s	风速

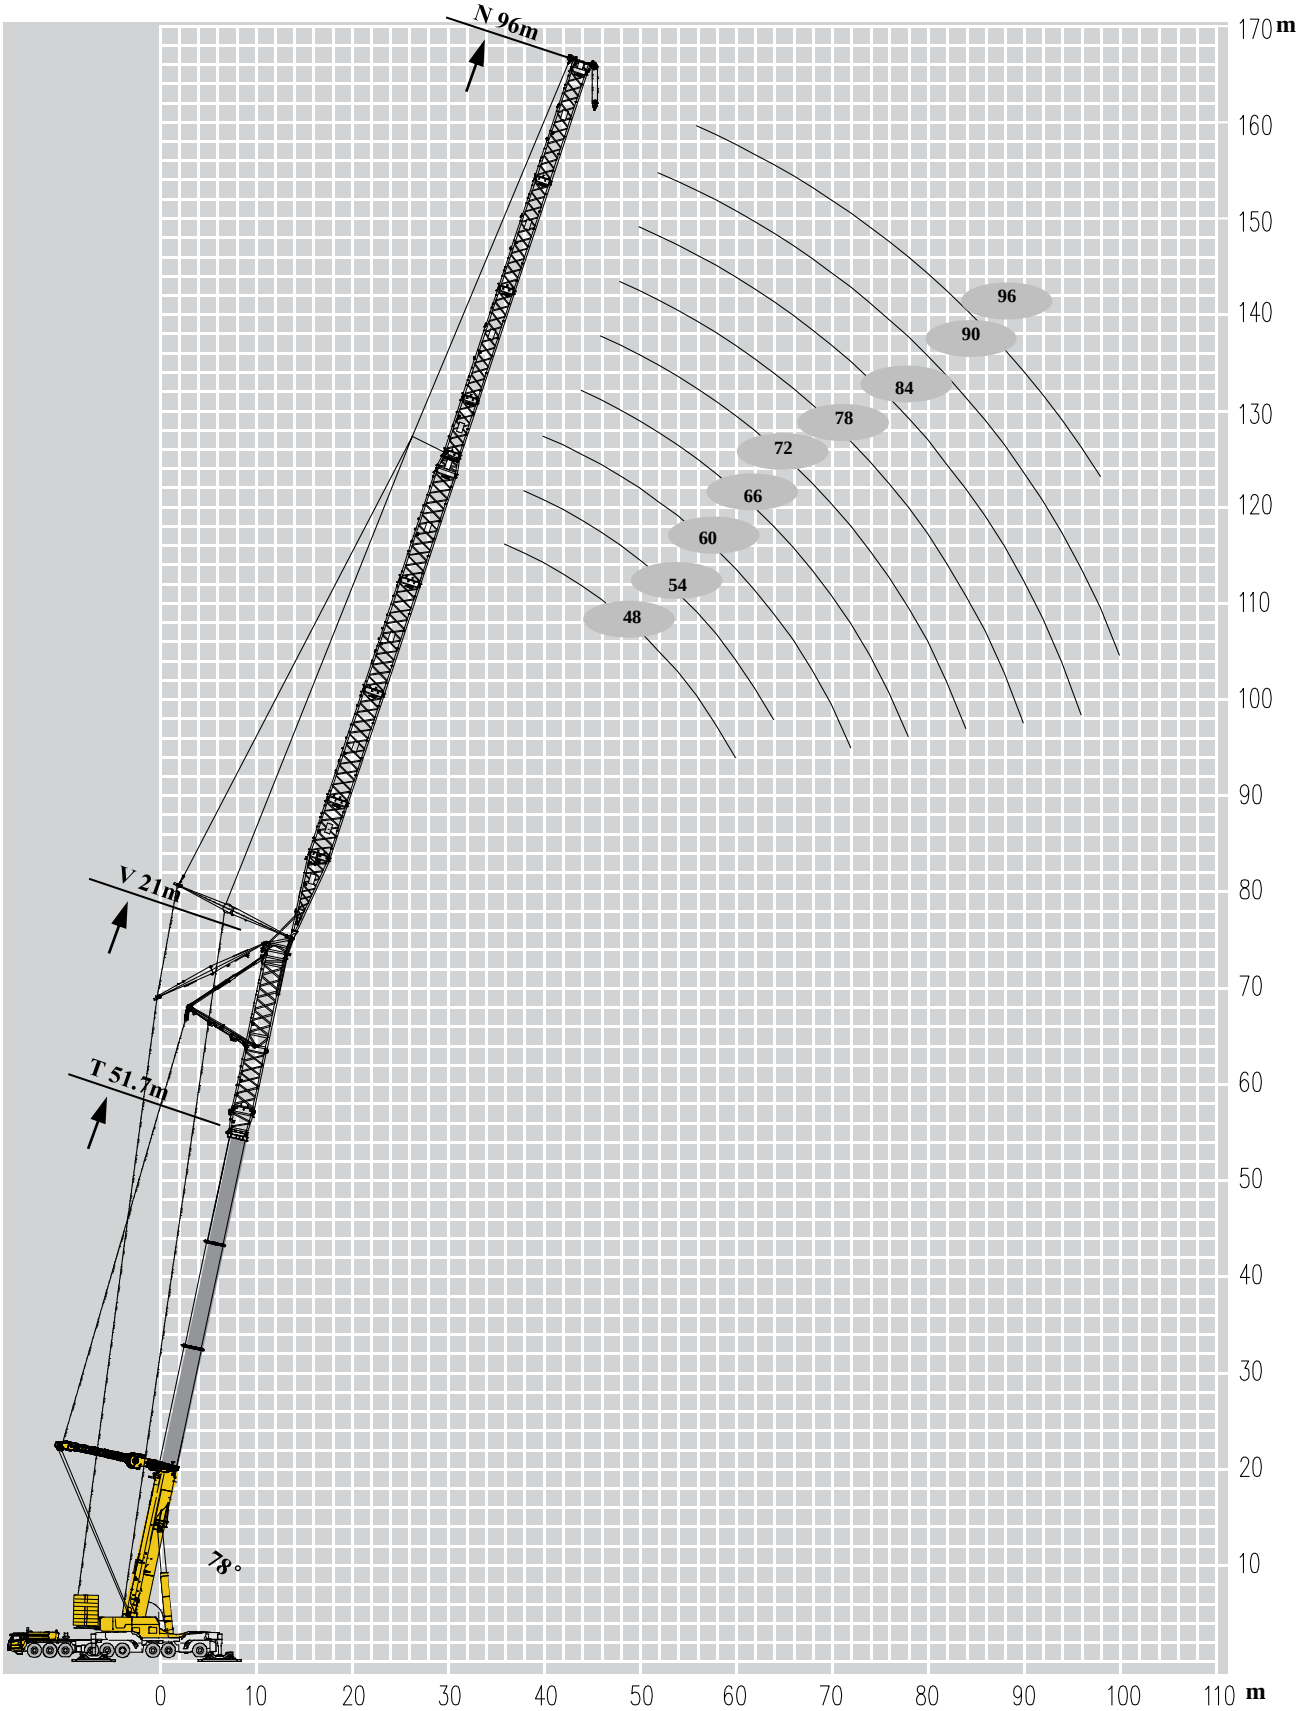
N 96m
V 21m
T 51.7m
78°
96
90
84
78
72
66
60
54
48
170 m
160
150
140
130
120
110
100
90
80
70
60
50
40
30
20
10
0
10
20
30
40
50
60
70
80
90
100
110 m

起重性能表
Lifting capacities

T 29~51.7m



	96m					90m					
	29m	34.7m	40.3m	46m	51.7m	29m	34.7m	40.3m	46m	51.7m	
						39.0					46
48	35.2					37.1	35.2				48
50	33.3	31.4				34.2	33.3	31.4			50
52	31.4	29.5	27.6			32.3	31.4	29.5	27.6	26.6	52
54	29.5	27.6	26.6	24.7		30.4	29.5	27.6	26.6	24.7	54
56	27.6	26.6	24.7	22.8	21.9	29.5	27.6	26.6	24.7	23.8	56
58	25.7	24.7	22.8	21.9	20.9	27.6	26.6	24.7	23.8	21.9	58
60	24.7	22.8	21.9	20.0	19.0	25.7	24.7	22.8	21.9	20.9	60
62	22.8	21.9	20.0	19.0	18.1	24.7	23.8	21.9	20.9	19.0	62
64	21.9	20.9	19.0	18.1	17.1	22.8	21.9	20.9	19.0	18.1	64
66	20.0	19.0	18.1	17.1	15.2	21.9	20.9	19.0	18.1	17.1	66
68	19.0	18.1	17.1	15.2	14.3	20.9	20.0	18.1	17.1	16.2	68
70	18.1	17.1	16.2	14.3	13.3	19.0	18.1	17.1	16.2	15.2	70
72	17.1	16.2	14.3	13.3	12.4	18.1	17.1	16.2	15.2	14.3	72
74	16.2	15.2	13.3	12.4	11.4	15.3	15.2	15.2	14.3	13.3	74
76	15.2	14.3	12.4	11.4	10.5	14.5	13.6	13.3	13.3	12.4	76
78	12.8	13.3	11.4	10.5	9.5	13.6	12.8	11.9	11.4	11.4	78
80	11.9	11.1	11.4	10.5	9.5	12.8	11.9	11.1	10.2	9.4	80
82	11.1	10.2	9.4	9.5	8.6	11.9	11.1	10.2	9.4	8.5	82
84	10.2	9.4	8.5	7.7	7.6	11.1	10.2	9.4	8.5	8.5	84
86	9.4	8.5	7.7	6.8	6.0	11.1	10.2	9.4	8.5	7.7	86
88	8.5	7.7	6.8	6.0	6.0	10.2	9.4	8.5	7.7	6.8	88
90	7.7	7.7	6.8	6.0	5.1	9.4	8.5	7.7	6.8	6.0	90
92	7.7	6.8	6.0	5.1	4.3	8.5	7.7	6.8	6.0	5.9	92
94	6.8	6.0	5.1	4.3	3.9	7.7	7.7	6.8	6.0	5.1	94
96	6.0	5.9	4.9	4.0	3.2		6.8	6.0	5.1	4.3	96
98	5.9	5.1	4.2	3.3	2.6			5.1	4.3	3.8	98
100	5.1	4.3	3.4	2.6					3.9	3.2	100
102		3.8	2.9	2.1							
104			2.3								
组合C	110	111	211	221	222	110	111	211	221	222	组合C
倍率	2	2	2	2	2	3	2	2	2	2	倍率
吊钩重量	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	吊钩重量
吊钩	130t	130t	130t	130t	130t	130t	130t	130t	130t	130t	吊钩
风速	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	风速

起重性能表
Lifting capacities


T 29~51.7m



	84m					78m					
	29m	34.7m	40.3m	46m	51.7m	29m	34.7m	40.3m	46m	51.7m	
36											36
38											38
40						50.4					40
42						47.5	45.6				42
44	43.7					44.7	43.7	40.9			44
46	40.9	39.0				42.8	40.9	39.0	37.1		46
48	38.0	37.1	35.2	33.3		39.9	39.0	37.1	35.2	33.3	48
50	36.1	35.2	33.3	31.4	30.4	38.0	36.1	35.2	33.3	31.4	50
52	34.2	33.3	31.4	29.5	28.5	36.1	34.2	33.3	31.4	30.4	52
54	32.3	31.4	29.5	28.5	26.6	34.2	32.3	31.4	29.5	28.5	54
56	30.4	29.5	27.6	26.6	25.7	32.3	31.4	29.5	28.5	26.6	56
58	29.5	27.6	26.6	24.7	23.8	30.4	29.5	27.6	26.6	25.7	58
60	27.6	26.6	24.7	23.8	22.8	29.5	27.6	26.6	24.7	23.8	60
62	25.7	24.7	23.8	21.9	20.9	27.2	26.6	24.7	23.8	22.8	62
64	24.7	23.8	21.9	20.9	20.0	26.4	24.7	23.8	22.8	21.9	64
66	23.8	22.8	20.9	20.0	19.0	22.1	22.0	21.8	20.9	20.0	66
68	21.9	20.9	20.0	19.0	18.1	21.3	20.4	20.2	20.0	19.0	68
70	18.7	20.0	19.0	18.1	17.1	20.4	19.6	17.9	17.6	17.3	70
72	17.9	17.0	18.1	16.2	15.2	18.7	17.9	17.0	16.2	16.0	72
74	17.0	16.2	15.3	13.6	14.3	17.9	17.0	16.2	15.3	14.5	74
76	16.2	15.3	14.5	13.6	12.8	17.0	16.2	15.3	14.5	13.6	76
78	15.3	14.5	13.6	12.8	11.9	16.2	15.3	14.5	13.6	12.8	78
80	14.5	13.6	12.8	11.9	11.1	15.3	14.5	13.6	12.8	11.9	80
82	13.6	12.8	11.9	11.1	10.2	14.5	13.6	12.8	11.9	11.1	82
84	12.8	11.9	11.1	10.2	9.4		13.6	11.9	11.1	11.1	84
86	11.9	11.1	10.2	9.4	8.5			11.9	11.1	10.2	86
88	11.1	10.2	9.4	8.5	8.5				10.2	9.4	88
90		10.2	9.4	8.5	7.7					8.5	90
92			8.5	7.7	6.8						92
94				6.8	6.6						94
96					5.9						96
组合C	110	111	211	221	222	110	111	211	221	222	组合C
倍率	3	3	2	2	2	3	3	3	3	2	倍率
吊钩重量	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	吊钩重量
吊钩	130t	130t	130t	130t	130t	130t	130t	130t	130t	130t	吊钩
风速	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	风速

起重性能表
Lifting capacities


T 29~51.7m



	72m					66m					
	29m	34.7m	40.3m	46m	51.7m	29m	34.7m	40.3m	46m	51.7m	
36						60.8					36
38	56.1					57.0	56.1				38
40	52.3	50.4				54.2	52.3	50.4			40
42	49.4	47.5	45.6			51.3	49.4	47.5	45.6		42
44	46.6	44.7	42.8	41.8		48.5	46.6	44.7	42.8	41.8	44
46	43.7	42.8	40.9	39.0	38.0	45.6	44.7	42.8	40.9	39.0	46
48	41.8	39.9	39.0	37.1	35.2	43.7	41.8	39.9	39.0	37.1	48
50	39.9	38.0	36.1	35.2	33.3	40.9	39.9	38.0	37.1	35.2	50
52	38.0	36.1	34.2	33.3	31.4	39.0	38.0	36.1	35.2	33.3	52
54	36.1	34.2	33.3	31.4	30.4	37.1	36.1	34.2	33.3	31.4	54
56	34.2	32.3	31.4	29.5	28.5	34.9	34.2	32.3	31.4	30.4	56
58	32.3	31.4	29.5	28.5	26.6	30.6	32.3	31.4	29.5	28.5	58
60	27.2	29.5	28.5	26.6	25.7	28.9	28.1	29.5	28.1	27.6	60
62	26.4	25.5	25.3	25.2	24.7	27.2	26.4	25.5	26.6	25.7	62
64	24.7	23.8	23.0	22.9	22.8	26.4	25.5	23.8	23.0	24.7	64
66	23.8	23.0	21.3	20.4	20.2	24.7	23.8	23.0	22.1	21.3	66
68	23.0	21.3	20.4	19.6	18.7	23.8	23.0	22.1	21.3	20.4	68
70	21.3	20.4	19.6	18.7	17.9	23.0	22.1	21.3	19.6	18.7	70
72	20.4	19.6	18.7	17.9	17.0		21.3	19.6	18.7	17.9	72
74	19.6	18.7	17.9	17.0	16.2			18.7	17.9	17.0	74
76	18.7	17.9	17.0	16.2	15.3				17.0	16.2	76
78		17.0	16.2	15.3	14.5					15.3	78
80			15.3	14.5	13.6						80
82				13.6	12.8						82
84					11.9						84
组合C	110	111	211	221	222	110	111	211	221	222	组合C
倍率	4	3	3	3	3	4	4	3	3	3	倍率
吊钩重量	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	吊钩重量
吊钩	130t	130t	130t	130t	130t	130t	130t	130t	130t	130t	吊钩
风速	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	风速

起重性能表
Lifting capacities

T 29~51.7m



	60m					54m					
	29m	**34.7m**	**40.3m**	**46m**	**51.7m**	**29m**	**34.7m**	**40.3m**	**46m**	**51.7m**	
						73.2					32
34	67.5					69.4	66.5	64.6			34
36	62.7	60.8				64.6	62.7	60.8	58.9		36
38	59.9	58.0	55.1	53.2		60.8	59.9	57.0	55.1	53.2	38
40	56.1	54.2	52.3	50.4	48.5	58.0	56.1	54.2	52.3	50.4	40
42	53.2	51.3	49.4	47.5	45.6	55.1	53.2	51.3	49.4	47.5	42
44	50.4	48.5	46.6	44.7	43.7	52.3	50.4	48.5	46.6	45.6	44
46	47.5	46.6	44.7	42.8	40.9	49.4	47.5	45.6	44.7	42.8	46
48	45.6	43.7	41.8	40.9	39.0	41.7	41.5	41.3	41.2	40.9	48
50	41.7	41.5	39.9	38.0	37.1	40.0	39.1	37.4	37.3	37.2	50
52	40.0	39.1	37.4	36.1	35.2	38.3	36.6	35.7	34.0	33.9	52
54	34.9	34.7	34.3	34.0	33.3	36.6	34.9	34.0	32.3	31.5	54
56	33.2	32.3	32.2	32.0	31.5	34.9	33.2	32.3	31.5	29.8	56
58	31.5	30.6	29.8	28.1	28.0	33.2	32.3	30.6	29.8	28.9	58
60	30.6	28.9	28.1	27.2	26.4	31.5	30.6	29.8	28.1	27.2	60
62	28.9	28.1	26.4	25.5	24.7		28.9	28.1	27.2	26.4	62
64	28.1	26.4	25.5	24.7	23.8			27.2	25.5	24.7	64
66	26.4	25.5	24.7	23.8	22.1				24.7	23.8	66
68		24.7	23.0	22.1	21.3						
70			22.1	21.3	20.4						
72				20.4	19.6						
组合C	110	111	211	221	222	110	111	211	221	222	组合C
倍率	4	4	4	4	3	5	4	4	4	4	倍率
吊钩重量	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	吊钩重量
吊钩	130t	130t	130t	130t	130t	130t	130t	130t	130t	130t	吊钩
风速	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	风速

起重性能表
Lifting capacities

T 29~51.7m



	48m					
	29m	**34.7m**	**40.3m**	**46m**	**51.7m**	
26						26
28	86.5					28
30	80.8	78.9				30
32	76.0	73.2	71.3			32
34	71.3	69.4	66.5	64.6		34
36	67.5	65.6	62.7	60.8	58.9	36
38	63.7	61.8	58.9	57.0	55.1	38
40	59.9	58.0	56.1	54.2	52.3	40
42	55.3	55.1	53.2	51.3	49.4	42
44	48.5	51.0	50.4	48.5	47.5	44
46	45.9	44.2	46.8	46.5	44.7	46
48	43.4	42.5	40.8	40.5	40.2	48
50	41.7	40.0	39.1	37.4	37.2	50
52	40.0	38.3	37.4	35.7	34.9	52
54	38.3	36.6	35.7	34.0	33.2	54
56		34.9	34.0	32.3	31.5	56
58			32.3	31.5	30.6	58
60				29.8	28.9	60
组合C	110	111	211	221	222	组合C
倍率	5	5	5	4	4	倍率
吊钩重量	5.4t	5.4t	5.4t	5.4t	5.4t	吊钩重量
吊钩	130t	130t	130t	130t	130t	吊钩
风速	9m/s	9m/s	9m/s	9m/s	9m/s	风速

起重性能表
Lifting capacities

T 29~51.7m




	66m					48m					
	29m	34.7m	40.3m	46m	51.7m	29m	34.7m	40.3m	46m	51.7m	
36	35.6										36
38	33.8	32.7				50.8					38
40	31.5	30.9	29.2			47.8	46.1				40
42	29.8	29.2	27.4	26.8		44.3	43.2	41.4			42
44	28.0	27.4	26.3	25.1	23.9	42.0	40.8	39.1	37.9		44
46	26.8	25.7	24.5	23.9	22.8	39.7	38.5	36.8	35.6	34.4	46
48	25.1	24.5	23.3	22.2	21.6	37.3	36.2	35.0	33.3	32.7	48
50	23.9	23.3	22.2	21.0	20.4	35.0	33.8	32.7	31.5	30.9	50
52	22.8	22.2	21.0	20.4	19.3	30.8	29.7	28.6	27.6	27.0	52
54	20.0	19.5	18.4	17.8	16.8	28.2	27.7	26.6	25.6	24.5	54
56	18.3	17.7	16.7	16.2	15.7	26.6	26.1	25.1	24.0	23.5	56
58	17.7	16.7	16.2	15.7	14.6	25.6	25.1	24.0	23.0	22.4	58
60	16.7	16.2	15.1	14.6	14.1	24.5	23.5	23.0	21.9	21.4	60
62	16.2	15.1	14.6	14.1	13.6	23.0	22.4	21.4	20.9	20.4	62
64	15.1	14.6	14.1	13.1	12.5	21.9	21.4	20.9	19.8	19.3	64
66	14.6	14.1	13.1	12.5	12.0		20.4	19.8	18.8	18.3	66
68	13.6	13.1	12.5	12.0	11.5			18.8	18.3	17.7	68
70	13.1	12.5	12.0	11.5	11.0				17.2	16.7	70
72		12.0	11.5	11.0	10.4						72
74			11.0	10.4	9.6						74
76				9.6	8.9						76
78					8.1						78
组合C	110	111	211	221	222	110	111	211	221	222	组合C
倍率	2	2	2	2	2	3	3	3	3	2	倍率
吊钩重量	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	吊钩重量
吊钩	130t	130t	130t	130t	130t	130t	130t	130t	130t	130t	吊钩
风速	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	风速

起重性能表
Lifting capacities

T 29~51.7m














	54m					60m					
	29m	**34.7m**	**40.3m**	**46m**	**51.7m**	**29m**	**34.7m**	**40.3m**	**46m**	**51.7m**	
32	43.2										32
34	40.8	39.1	37.9			39.7					34
36	37.9	36.8	35.6	34.4		36.8	35.6				36
38	36.2	35.0	33.3	32.1	30.9	35.0	33.8	32.1	30.9		38
40	33.8	32.7	31.5	30.3	29.2	32.7	32.1	30.3	29.2	28.6	40
42	32.1	30.9	29.8	28.6	28.0	30.9	30.3	28.6	28.0	26.8	42
44	30.3	29.8	28.6	27.4	26.3	29.2	28.6	27.4	26.3	25.1	44
46	27.0	25.9	24.9	23.8	23.2	28.0	26.8	25.7	25.1	23.9	46
48	24.5	24.0	23.0	21.9	21.4	26.3	25.7	24.5	23.3	22.8	48
50	23.5	22.4	21.9	20.9	20.4	23.2	22.7	21.6	20.5	20.0	50
52	22.4	21.4	20.9	19.8	19.3	21.4	20.9	19.8	18.8	18.3	52
54	21.4	20.4	19.8	18.8	18.3	20.4	19.8	18.8	18.3	17.2	54
56	20.4	19.8	18.8	18.3	17.2	19.3	18.8	17.7	17.2	16.7	56
58	19.3	18.8	17.7	17.2	16.7	18.3	17.7	17.2	16.2	15.7	58
60	18.3	17.7	17.2	16.2	15.7	17.7	17.2	16.2	15.7	15.1	60
62		17.2	16.2	15.7	15.1	16.7	16.2	15.7	14.6	14.1	62
64			15.7	15.1	14.6	16.2	15.7	14.6	14.1	13.6	64
66				14.1	13.6	15.1	14.6	14.1	13.6	13.1	66
							14.1	13.6	13.1	12.5	68
								13.1	12.0	12.0	70
									11.5	11.0	72
组合C	110	111	211	221	222	110	111	211	221	222	组合C
倍率	3	3	3	2	2	3	2	2	2	2	倍率
吊钩重量	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	吊钩重量
吊钩	130t	130t	130t	130t	130t	130t	130t	130t	130t	130t	吊钩
风速	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	风速

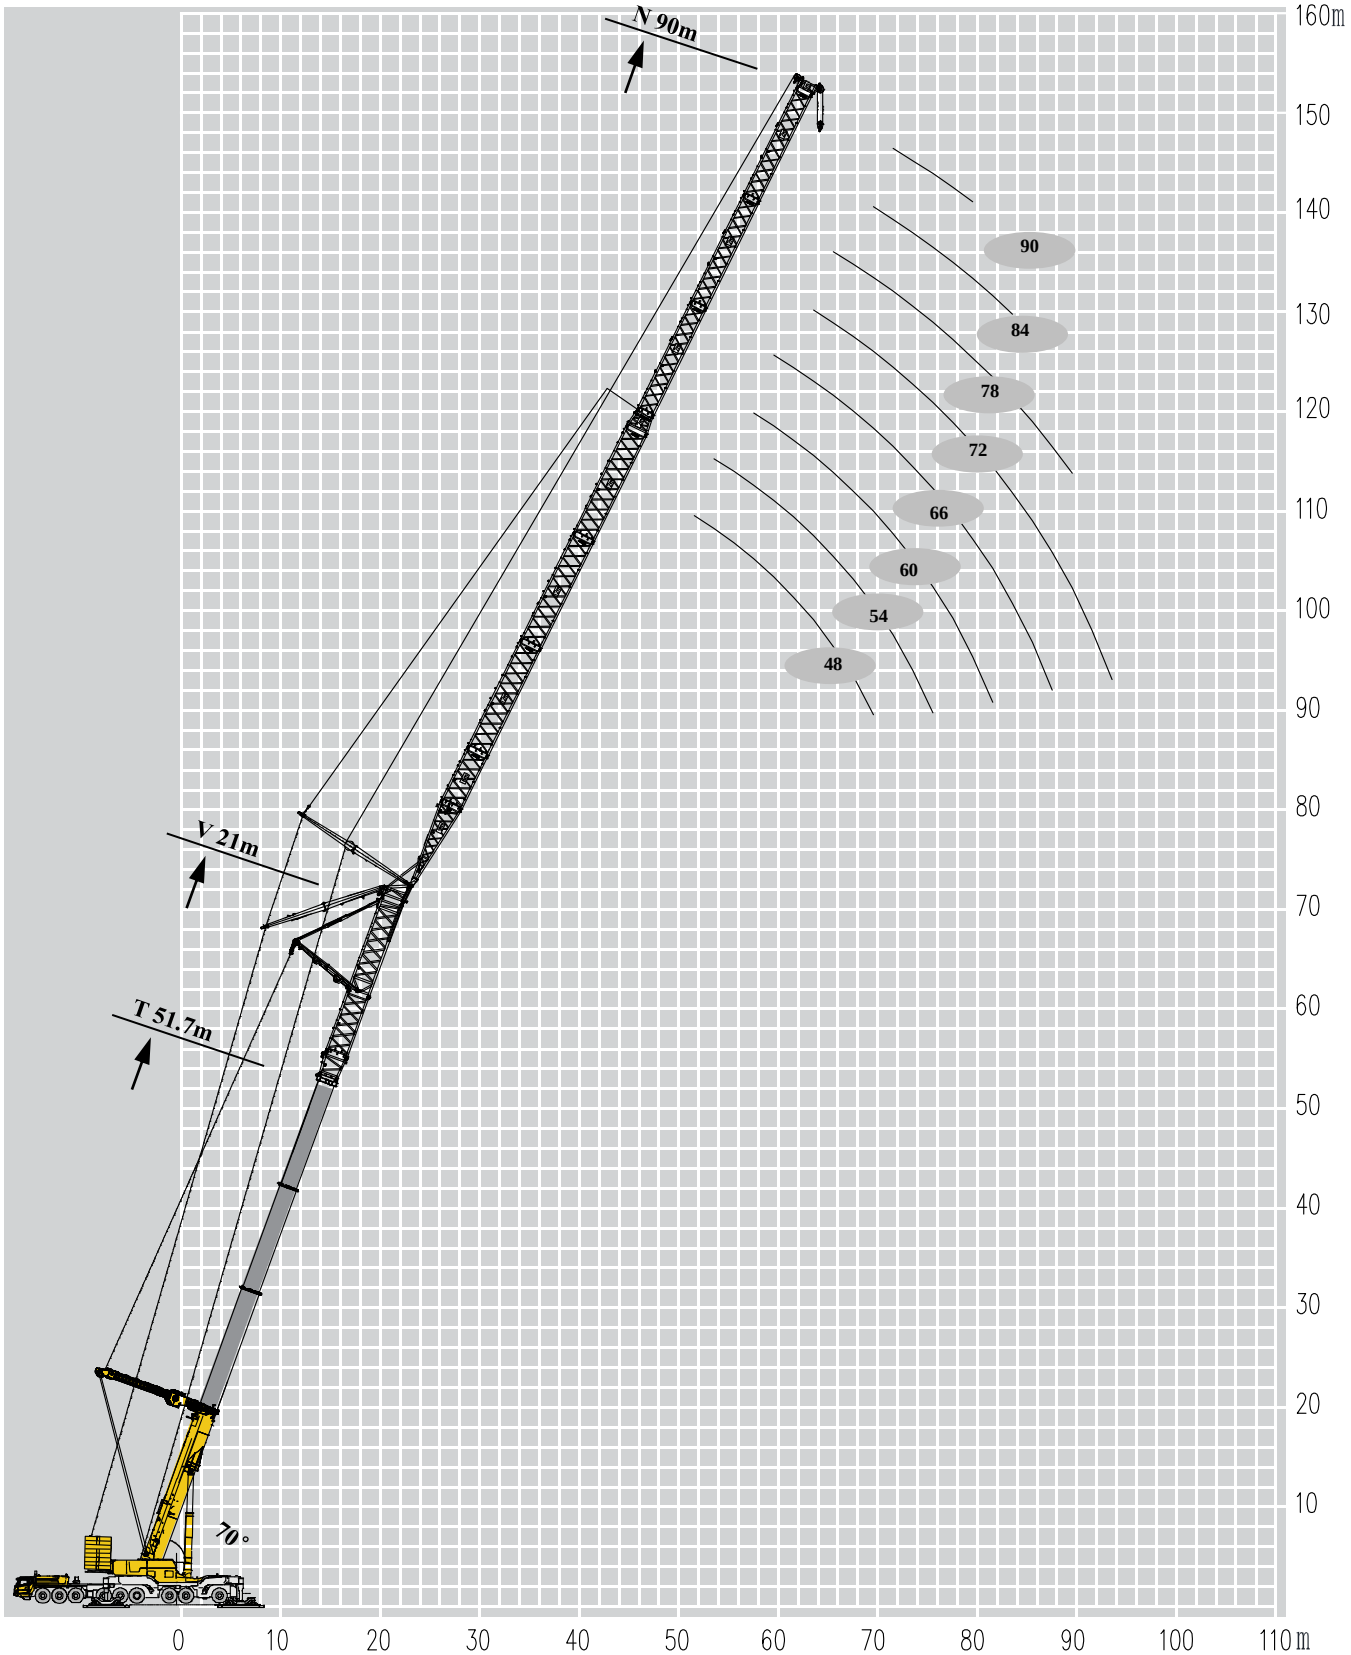
N 90m
V 21m
T 51.7m
70°
90
84
78
72
66
60
54
48
160m
150
140
130
120
110
100
90
80
70
60
50
40
30
20
10
0
10
20
30
40
50
60
70
80
90
100
110m

起重性能表
Lifting capacities

T 29~51.7m




	90m					48m					
	29m	34.7m	40.3m	46m	51.7m	29m	34.7m	40.3m	46m	51.7m	
64	16.2										40
66	14.1	13.3				48.5					42
68	13.2	11.4	10.5			42.2	41.4				44
70	12.3	10.6	8.8	7.6		40.5	37.8	36.8			46
72	11.4	9.7	7.9	6.2	5.7	37.8	36.1	33.4			48
74	10.6	8.8	7.0	6.2	4.4	36.1	34.3	31.7	31.3		50
76	9.7	8.8	7.0	5.3	3.5	34.3	32.6	30.8	28.2	27.6	52
78	8.8	7.9	6.2	4.4	2.9	31.5	30.8	29.0	27.3	25.5	54
80	7.9	7.0	5.3	3.5	2.2	30.6	28.9	27.3	25.5	23.8	56
82	7.2	6.2	4.4	3.0		28.9	27.2	25.5	24.6	22.9	58
84	6.8	6.0	4.1	2.3		27.2	26.4	23.8	23.5	22.0	60
86	6.0	5.0	3.3			26.4	24.7	23.0	21.3	21.1	62
88	5.7	4.3	2.6				23.8	22.1	20.4	19.6	64
90	5.0	3.6						21.3	19.6	17.9	66
92	4.3	3.0							18.7	17.0	68
94	3.6	2.4								16.2	70
96	3.0										72
98	2.4										74
组合C	110	111	211	221	222	110	111	211	221	222	组合C
倍率	1	1	1	1	1	3	3	3	2	2	倍率
吊钩重量	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	吊钩重量
吊钩	130t	130t	130t	130t	130t	130t	130t	130t	130t	130t	吊钩
风速	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	风速

起重性能表
Lifting capacities

T 29~51.7m













	54m					60m					
	29m	34.7m	40.3m	46m	51.7m	29m	34.7m	40.3m	46m	51.7m	
44	43.7										44
46	37.8	37.3				37.1					46
48	36.1	34.3				32.6	32.2				48
50	34.3	32.6	32.3			30.8	29.0	28.5			50
52	32.6	30.8	28.2	27.6		29.9	28.2	25.5	24.8		52
54	30.8	29.0	27.3	25.5	24.8	28.2	26.4	23.8	22.0		54
56	29.9	28.2	25.5	23.8	22.0	26.4	24.6	22.9	21.1	20.9	56
58	27.2	26.4	24.6	22.9	21.1	25.5	23.8	22.0	20.2	18.5	58
60	26.4	24.7	23.8	22.0	20.2	23.8	22.9	20.2	19.4	17.6	60
62	24.7	23.0	22.0	20.2	19.4	22.1	21.1	19.4	17.6	16.7	62
64	23.8	22.1	20.4	19.4	18.5	21.3	19.6	18.5	16.7	15.8	64
66	23.0	21.3	19.6	17.9	16.7	20.4	18.7	17.0	15.8	15.0	66
68	21.3	20.4	18.7	17.0	16.2	19.6	17.9	16.2	14.5	14.1	68
70		19.6	17.9	16.2	15.3	18.7	17.0	15.3	13.6	13.2	70
72			17.0	15.3	14.5	17.0	16.2	14.5	13.6	11.9	72
74				14.5	13.6		15.3	13.6	12.8	11.1	74
76					12.8			12.8	11.9	11.1	76
78									11.1	10.2	78
80										9.4	80
组合C	110	111	211	221	222	110	111	211	221	222	组合C
倍率	3	3	2	2	2	3	2	2	2	2	倍率
吊钩重量	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	吊钩重量
吊钩	130t	130t	130t	130t	130t	130t	130t	130t	130t	130t	吊钩
风速	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	风速

起重性能表
Lifting capacities

T 29~51.7m




	66m					72m					
	29m	34.7m	40.3m	46m	51.7m	29m	34.7m	40.3m	46m	51.7m	
50	33.3										50
52	29.0	28.8									52
54	28.2	26.4				28.5					54
56	26.4	24.6	23.8			24.6	24.7				56
58	24.6	22.9	21.1	20.9		23.8	22.0				58
60	23.8	22.0	20.2	18.5	18.1	22.0	20.2	18.5			60
62	22.9	21.1	19.4	17.6	15.8	21.1	19.4	17.6	15.8		62
64	21.1	20.2	17.6	15.8	15.0	20.2	18.5	16.7	15.0	14.3	64
66	20.2	18.5	16.7	15.0	14.1	18.5	17.6	15.8	14.1	12.3	66
68	18.7	17.6	15.8	14.1	13.2	17.6	16.7	15.0	13.2	11.4	68
70	17.9	16.2	15.0	13.2	12.3	16.7	15.8	14.1	12.3	10.6	70
72	17.0	15.3	14.1	13.2	11.4	15.3	15.0	13.2	11.4	9.7	72
74	16.2	14.5	12.8	12.3	10.6	14.5	13.6	12.3	10.6	9.7	74
76	15.3	13.6	12.8	11.1	9.7	13.6	12.8	11.1	9.7	8.8	76
78	14.5	13.6	11.9	10.2	9.4	12.8	11.9	10.2	8.5	7.9	78
80	13.6	12.8	11.1	9.4	8.5	11.9	11.1	9.4	8.5	7.0	80
82		11.9	10.2	9.2	7.7	11.9	10.2	9.4	7.7	6.4	82
84			9.4	8.5	7.2	11.1	10.2	8.5	6.8	5.7	84
86				7.7	6.5	10.2	9.4	7.7	6.4	5.0	86
88					5.8		8.5	6.8	5.7	4.4	88
90								6.4	5.0	3.8	90
92									4.3	3.2	92
94										2.6	94
组合C	110	111	211	221	222	110	111	211	221	222	组合C
倍率	2	2	2	2	2	2	2	2	1	1	倍率
吊钩重量	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	吊钩重量
吊钩	130t	130t	130t	130t	130t	130t	130t	130t	130t	130t	吊钩
风速	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	风速


起重性能表
Lifting capacities

T 29~51.7m













	78m					84m					
	29m	34.7m	40.3m	46m	51.7m	29m	34.7m	40.3m	46m	51.7m	
56	24.7										56
58	22.0										58
60	20.2	20.0				20.9					60
62	19.4	17.6	17.1			17.6	17.1				62
64	18.5	16.7	15.0	14.3		16.7	15.0	14.3			64
66	17.6	15.8	14.1	12.3	11.4	15.8	14.1	12.3			66
68	15.8	15.0	13.2	11.4	9.7	15.0	13.2	11.4	10.5		68
70	15.0	14.1	12.3	10.6	8.8	14.1	12.3	10.6	8.8	7.6	70
72	14.1	13.2	11.4	9.7	7.9	13.2	11.4	9.7	7.9	7.0	72
74	13.2	12.3	10.6	8.8	7.9	12.3	10.6	8.8	7.0	6.2	74
76	13.2	11.4	9.7	7.9	7.0	11.4	9.7	7.9	7.0	5.3	76
78	11.9	10.6	8.8	7.9	6.2	10.6	9.7	7.9	6.2	4.4	78
80	11.1	9.7	8.8	7.0	5.6	9.4	8.8	7.0	5.3	4.0	80
82	10.2	9.4	7.9	6.2	4.9	8.5	7.7	6.2	4.8	3.2	82
84	9.4	8.5	6.8	5.6	4.2	8.5	6.8	5.1	4.1	2.6	84
86	8.5	7.7	6.0	4.8	3.5	7.7	6.6	4.8	3.4		86
88	8.5	6.8	5.6	4.1	2.8	6.8	5.9	4.2	2.6		88
90	7.7	6.6	4.9	3.5	2.2	6.0	5.1	3.5	2.0		90
92	6.8	5.8	4.3	2.9		5.8	4.5	2.9			92
94		5.1	3.6	2.3		5.1	3.9	2.3			94
96			3.0			4.4	3.3				96
98						3.8	2.6				98
100							2.0				100
组合C	110	111	211	221	222	110	111	211	221	222	组合C
倍率	2	2	1	1	1	2	1	1	1	1	倍率
吊钩重量	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	吊钩重量
吊钩	130t	130t	130t	130t	130t	130t	130t	130t	130t	130t	吊钩
风速	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	9m/s	风速

起重性能表
Lifting capacities

T 29~51.7m



	48m					
	29m	**34.7m**	**40.3m**	**46m**	**51.7m**	
40						40
42	28.0					42
44	24.3	23.8				44
46	23.2	22.2	21.5			46
48	22.2	21.1	19.5			48
50	21.1	20.0	18.4	18.1		50
52	20.0	18.9	17.3	16.2	15.8	52
54	18.3	17.8	16.8	15.7	14.6	54
56	17.7	16.7	15.7	14.6	13.5	56
58	16.7	15.7	14.6	14.1	13.0	58
60	16.2	15.1	14.1	13.4	12.1	60
62	15.1	14.6	13.1	12.2	11.2	62
64		13.6	12.5	11.3	10.0	64
66			11.9	10.5	9.2	66
68				9.7	8.4	68
70					7.7	70
组合C	110	111	211	221	222	组合C
倍率	3	2	2	2	1	倍率
吊钩重量	5.4t	5.4t	5.4t	5.4t	5.4t	吊钩重量
吊钩	130t	130t	130t	130t	130t	吊钩
风速	9m/s	9m/s	9m/s	9m/s	9m/s	风速

起重性能表
Lifting capacities

T 29~51.7m



	54m					60m					
	29m	34.7m	40.3m	46m	51.7m	29m	34.7m	40.3m	46m	51.7m	
44	25.1										44
46	22.2	21.8									46
48	21.1	20.0				21.6					48
50	20.0	18.9	18.7			18.9	18.6				50
52	18.9	17.8	16.2	15.8		17.8	16.8	15.8			52
54	17.8	16.8	15.7	14.6	14.1	17.3	15.7	14.6	14.1		54
56	17.3	16.2	14.6	13.5	12.4	16.2	15.1	14.1	12.4		56
58	15.7	15.1	14.1	13.0	11.4	15.1	14.6	13.0	11.7	10.7	58
60	15.1	14.1	13.5	12.1	10.5	14.6	13.5	12.4	10.7	9.0	60
62	14.1	13.6	12.4	11.2	9.6	14.1	13.0	11.6	9.8	8.1	62
64	13.6	12.5	11.5	10.3	8.8	12.5	12.4	10.7	8.9	7.3	64
66	13.1	12.0	10.7	9.1	8.0	12.0	11.3	9.8	8.1	6.6	66
68	12.5	11.5	9.9	8.4	7.0	11.5	10.4	8.7	7.3	5.9	68
70		10.7	9.1	7.6	6.4	10.9	9.6	7.9	6.4	5.2	70
72			8.3	6.9	5.7	10.1	8.8	7.2	5.7	4.6	72
74				6.2	5.1	9.3	8.1	6.5	5.1	3.9	74
76					4.5		7.4	5.9	4.5	3.3	76
78								5.2	3.9	2.8	78
80									3.3	2.2	80
组合C	110	111	211	221	222	110	111	211	221	222	组合C
倍率	2	2	2	1	1	2	2	1	1	1	倍率
吊钩重量	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	5.4t	吊钩重量
吊钩	130t	130t	130t	130t	130t	130t	130t	130t	130t	130t	吊钩

主要技术参数表
Table of main technical parameters

类别 Category	项目 Item		单位 Unit	参数 Parameter	
尺寸参数 Dimensions	外形尺寸（长×宽×高） Dimensions (length ×width ×height)		mm	385/95R25（14.00R25）	21568×3000×3950
				445/95R25 (16.00R25)	21568×3000×4000
				525/80R25 (20.5R25)	21568×3000×4000
	轴距 Wheel base		mm	1600+1600+2700+1600+1600+3150+1600+3250	
	轮距（前/后） Track（Front/ Rear）		mm	385/95R25（14.00R25）	2540
				445/95R25(16.00R25)	2590
	前悬/后悬 Front/ Rear overhang		mm	2780/1688	
	前伸/后伸 Front/ Rear extension		mm	0/0	
重量参数 Weight	最大允许总质量 Total vehicle mass in travel configuration		kg	91850	92000
	轴荷 Axle load	一轴 1st axle	kg	8000	
		二轴 2nd axle	kg	8000	
		三轴 3rd axle	kg	8000	
		四轴 4th axle	kg	8000	
		五轴 5th axle	kg	12000	
		六轴 6th axle	kg	12000	
		七轴 7th axle	kg	12000	
		八轴 8th axle	kg	12000	
		九轴 9th axle	kg	12000	
动力参数 Power	发动机型号 Engine model		——	(底盘Chassis) OM502LA.E3B/1	(上车Superstructure) OM460LA.E3A/5
	额定功率/转速 Engine rated power/rpm		kW/(r/min)	480/1800	295/1800
	最大净功率/转速 Max. net power/rpm		kW/(r/min)	480/1800	295/1800
	最大输出扭矩/转速 Max. output torque/rpm		N.m/(r/min)	3000/1300	1900/1300
行驶参数 Travel	最高车速 Max. travel speed		km/h	80	
	最低稳定车速 Min. stable travel speed		km/h	2.4	
	最小转弯直径 Min. turning diameter		m	30	
	最小离地间隙 Min. ground clearance		mm	519/ 385/95R25 569/ 445/95R25 (悬挂中位状态/ suspensions are partially elevated)	
	接近角 Approach angle		°	12.5（14.00R25）/ 14（16.00R25/20.50R25）	
	离去角 Departure angle		°	16（14.00R25）/ 17（16.00R25/20.50R25）	
	制动距离（制动初速度为30 km/h） Braking distance (at 30 km/h)		m	≤10	
	最大爬坡能力 Max. grade ability		%	60	
	百公里油耗 Fuel consumption per 100 km		L	110	
噪音 Noise	加速行驶机外噪声 Exterior noise level		dB(A)	≤88	
	驾驶员耳旁噪声 Noise level at seated position		dB(A)	≤90	

主要技术参数表
Table of main technical parameters

类别 Category	项目 Item			单位 Unit	参数 Parameter
主要性能参数 Main performance	最大额定总起重量 Max. total rated lifting capacity			t	1600
	最小额定工作幅度 Min. rated working radius			m	2
	转台尾部回转半经 Turning radius at turntable tail			mm	6660
	最大起重力矩 Max. load moment	基本臂 Base boom		kN.m	31360
		最长主臂 Fully-extended boom		kN.m	24634
		最长主臂+副臂 Fully-extended boom + Jib		kN.m	21560
	支腿跨距 Outrigger span	纵向 Longitudinal		m	13
		横向 Lateral		m	13
	起升高度 Hoist height	基本臂 Base boom		m	18
		最长主臂 Fully-extended boom		m	92
		最长主臂+副臂 Fully-extended boom + Jib		m	138/155
	起重臂长度 Boom length	基本臂 Base boom		m	18.4
		最长主臂 Fully-extended boom		m	92.4
		最长主臂+副臂 Fully-extended boom + Jib		m	138.4/156
工作速度参数 Working speed	起重臂起臂时间 Boom raising time			s	≤240
	起重臂全伸时间 Boom fully extending time			s	≤3000
	最大回转速度 Max. slewing speed			r/min	0.5
	支腿收放时间 Outrigger extending and retracting time	水平支腿 Outrigger beam	收 Retracting	s	≤40
			放 Extending	s	≤40
		垂直支腿 Outrigger jack	收 Retracting	s	≤240
			放 Extending	s	≤240
	起升速度（单绳,第10层，空载） Hoisting speed (single line, 10th layer, no load)	主起升机构 Main winch		m/min	≥125
	起升速度（单绳、第8层、空载）Hoisting speed (single line, 8th layer, no load)	变幅起升机构 Luffing winch system		m/min	≥110
噪声 Noise	机外辐射 Exterior noise level			dB（A）	≤124
	司机位置处 Noise level at seated position			dB（A）	≤90

符号标识
Description of symbols

	上车 Superstructure		底盘 Chassis
	起重能力 Lifting capacity		车桥 Axle
	吊臂长度 Boom length		行驶速度 Driving speed
	工作幅度 Radius		爬坡能力 Grade ability
	吊臂仰角 Boom angle		轮胎 Tires
	主臂起升高度 Hoist height with boom		支腿 Outriggers
	固定副臂长度 Fixed jib length		吊钩 Hook block
	副臂安装角 Jib offset angle		平衡重 Counterweight
	副臂起升高度 Hoist height with jib		卷扬 Winch
	独立臂头或风电臂 Independent jib head /Wind power jib		360°全回转 360° operation of the boom
	变幅副臂 Luffing jib		超起 Super lifting

注意事项
Notes

1. 本手册仅供参考，所有信息均仅供说明，不应依赖它去操作起重机，起重机的正确操作说明请参见操作手册和额定起重量手册
2. 表中所列起重量单位均为公吨（t），是当前臂长及幅度下，起重机在稳固、水平表面上能够保证的最大总起重量，包括吊钩和吊具的重量，吊重时必须减去上述装置的重量。
3. 表中的工作幅度为起吊重物离地时起重物到起重机回转轴线的水平距离。
4. 应按主臂仰角范围作业，即使是空载，也不应使主臂仰角处于范围外。
5. 只允许在5级（瞬时风速14.1m/s，风压125N/m2）风以下进行作业。

1. The manual is intended as reference only. See Operation Manual and Rated Lifting Capacity Manual for correct operation instructions.
2. The total rated loads given in the rated load charts are the maximum lifting capacity (in t) under corresponding boom length and radius when the crane is set up on firm and level ground, which includes the weight of the hook block and slings. The weight of above-mentioned devices should be deducted from the rated lifting load.
3. The working radius shown in the rated load charts is the horizontal distance between the load and slewing axis of crane when the load is lifted off the ground.
4. Observe the boom angle limit. Never operate the crane with the boom angle beyond the recommended limit even if a load is not being carried.
3. A lifting operation is permissible only when the wind force is below grade 5 (instantaneous wind speed is 14.1 m/s, wind pressure is 125 N/m2).

地址：江苏省徐州市经济技术开发区高新路68号

Add：No. 68, Gaoxin Road, Economic and Technological Development Zone, Xuzhou, Jiangsu, China

电话(Tel)：+86-516-83462242/83462350

质量监督电话(Quality Inquiry Tel)：+86-516-87888268

备件电话(Spare Parts Tel)：+86-516-83461542

邮编(Post Code)：221004

网址(Web)：www.xcmg.com/qizhongji

服务热线 Service Tel

400-110-9999

400-001-5678

本印刷品不属于合同。出于产品不断改进的需要，我们保留对产品型号、参数、配置进行变更的权利，恕不另行通知。图片仅供参考，具体产品以实物为准。图片中产品可能并非标准配置，部分部件可能需要另行购置。办理牌照和上路行驶需遵守当地法规。

This print does not belong to the contract. We reserve the right to modify the design (such as product model, parameters and configuration) without notice for improvement. The pictures are just for reference. The product in the picture may not be standard configuration. Some parts need to be purchased separately. Conform to the local laws for license application and road traveling.