



XCA500SA全地面起重机 / All Terrain Crane

技术规格书


Technical specifications



500 t



85 m



137 m





目录


Contents

| | |
|---|---------|
| 目录 Contents | |
| 尺寸参数 Dimensions | 3 |
| 技术规格 Technical specifications | 4-9 |
| 重量/作业速度 Weight / Working speeds | 10-11 |
| 运输部件尺寸 Dimension and weight of parts transported | 12-15 |
| 平衡重 Counterweight | 16 |
| 臂架组合方案 Boom / Jib combinations | 17-21 |
| 主臂 Boom | 22-25 |
| 主臂+超起 Boom + Super lifting device | 26-28 |
| 主臂+风电臂 Boom + Wind power jib | 29-31 |
| 主臂+固定副臂 Boom + Fixed Jib | 32-62 |
| 主臂+固定副臂+超起 Boom + Fixed jib + Super lifting device | 63-93 |
| 主臂+变幅副臂+超起 Boom + Luffing jib + Super lifting device | 94-113 |
| 主要技术参数表 Table of main technical data | 114-115 |
| 符号标识 Description of symbols | 116 |
| 注意事项 Notes | 117 |

尺寸参数 Dimensions

72t行驶状态 72t travel configuration

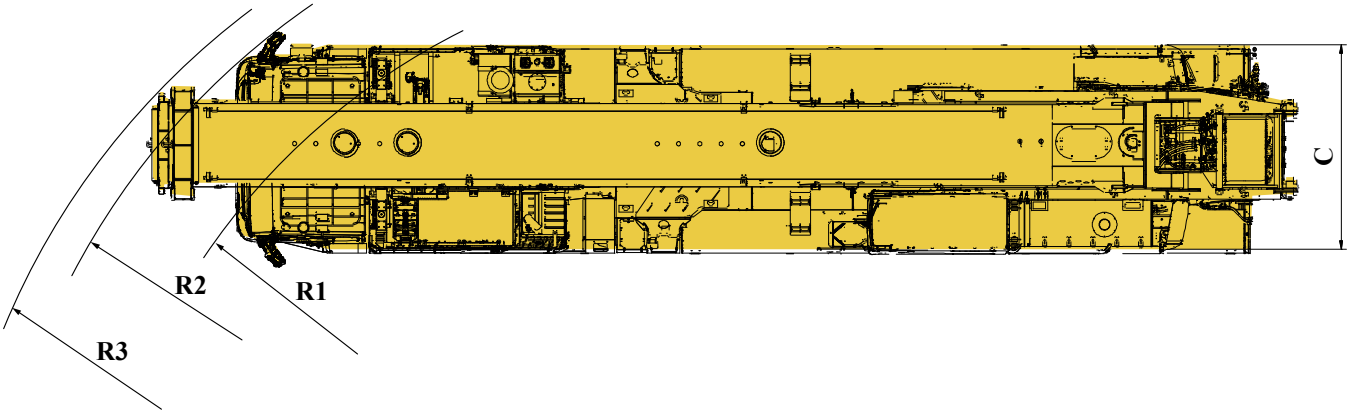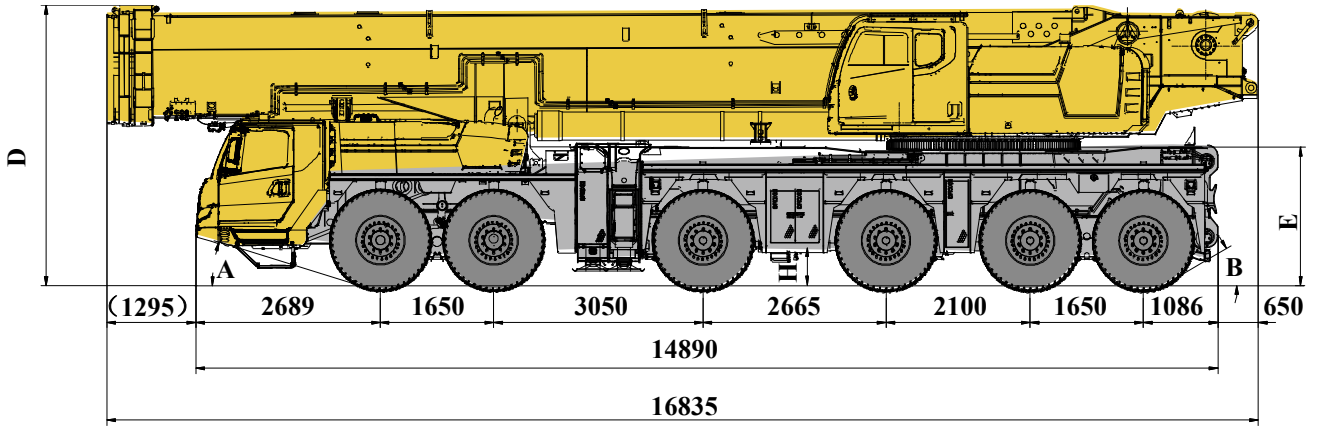

|  | A | B | C | D | E | H | R1 | R2 | R3 |
|---|-----|-----|--------|--------|--------|-------|------|-------|-------|
| 445/95 R 25 (16.00 R 25) | 16° | 30° | 3000mm | 4000mm | 2015mm | 330mm | 6780 | 11650 | 13350 |

*D=4000mm
该状态为悬挂最低位状态
Suspensions at lowest position

技术规格

Technical specifications



底盘

车架 徐工设计、制造，箱型截面结构，高强度钢材制造。

支腿 4支腿，H形布置，配备支腿压力传感器，水平伸缩和垂直伸缩由液压控制。支腿油缸均设有单向阀，且垂直支腿带有双向液压锁；底盘两侧装有电控操纵控制台，控制台板装有夜光水平仪、照明灯和增速按钮。

发动机 奔驰发动机 OM473LA.E5-1
额定功率480W/1800rpm
最大扭矩3100N·m/ (1200-1400) rpm
Eu stage V排放标准

液压系统 变量泵通过取力器连接至发动机，用于支腿、转向、悬挂和散热。

变速箱 ZF电控自动变速箱，12个前进档，2个倒档，带变矩器、缓速器。

分动箱 株齿机械式分动箱

车桥 大江高强度车桥，配备气控盘式制动器，3、4、5、6桥驱动，全桥转向。



底盘

悬挂 所有车桥均采用油气悬挂系统，减震效果好，具有自动调平、悬架升降、弹性刚性转换等功能。

悬架油缸行程：-120mm ~ +130mm。

轮胎 12个轮胎，每桥均装单胎，承载力大。
轮胎规格：445/95R25 (16.00R25)

转向 全桥转向，1~2轴为机械加液压助力转向，3~6轴为电液控制转向，可适应多种工况的要求，实现多种转向模式。


制动 行车制动：双回路气压制动，作用于所有车轮。
驻车制动：弹簧储能制动，作用于2-6轴车轮。
辅助制动：发动机制动，变速箱缓速制动。


驾驶室 新型钢结构豪华全宽驾驶室。配备电动升降器的安全玻璃、可调式座椅、电动调节后视镜、可调节高度及角度方向盘，倒车显示器、大屏幕彩色液晶显示器等。新型组合式中控台布局安全合理，采用圆弧造型，体现人性化的设计。
标配冷暖空调。

电气系统 直流24伏特，2个12伏电池组串并联。

技术规格

Technical specifications

|  | 上车 |
|--|---|
| 结构 | 徐工设计、制造，高强度钢材制造。 |
| 液压系统 | 电比例变量泵用于起升、回转，开式泵用于变幅、伸缩。采用进口电液换向阀，与变量柱塞泵进行良好的匹配，启停平稳，大功率风冷式液压油冷却器，有效降低系统油温。 |
| 操纵方式 | 先导电比例操纵，无级调速，由左右2个操纵手柄控制起重机的全部动作。 |
| 主起升机构 | 由液压马达驱动，内置行星齿轮减速器和常闭式制动器。双折线绳槽卷筒，进口钢丝绳，配置袋式索具。 |
| 回转机构 | 三排滚柱外齿式回转支承，双回转机构，由液压马达驱动，内置行星齿轮减速器和常闭式制动器，可连续回转360°，具有动力控制或自由回转的功能，可无级调速。 |
| 操纵室 | 带大圆弧玻璃，推拉式车门，可调式座椅，装有安全玻璃和顶部保护栏，配备力矩限制器、电控箱、电动前窗刮水器、发动机动力加速踏板、发动机起动开关、前顶窗双层遮阳帘、后窗遮阳帘等。标配冷暖空调。 |
| 安全装置 | 液压平衡阀、液压溢流阀、液压双向锁、力矩限制器；操纵杆弹簧式回中系统；三圈保护器，防止钢丝绳过放；臂头设置高度限位，防止钢丝绳过卷；风速仪，检测高空风速；卷扬监视装置，实时监控卷扬状态。 |
| 组合配重 | 总重153t，有0t、20t、40t、60t、80t、100t、120t、140t、150t和153t十种组合方式。 |

|  | 上车 |
|---|--|
| 力矩限制器 | 当实际力矩接近过载时，发出听视觉警报，并在过载之前自动停止危险动作。具有超载记忆功能（黑匣子）和故障自诊断功能。 |
| 电气系统 | 直流24伏特，采用PLC可编程控制器，CAN总线控制网络，具有系统实时检测和故障自诊断功能。 |
| 吊钩 | 225吨吊钩（双钩） 175吨吊钩（双钩） 90吨吊钩（双钩） 40吨吊钩 13.5吨吊钩 |
| 变副卷扬机构 | 包括变幅滑轮组，用于变幅副臂的变幅。 |
| 主臂 | 7节，“U”形截面的筒形焊接结构。单缸插销伸缩机构，1个装有安全阀的双作用的伸缩油缸，控制所有吊臂的伸缩，有46%、92%和全伸模式可供选择。主臂长度：16.1m~85m。 |
| 固定副臂 | 桁架式焊接结构，有0°、20°、40°和60°四种安装角度。固定副臂长度：6m~42m。 |
| 变幅副臂 | 桁架式焊接结构，具有68°、75°、82°三种主臂仰角。变幅副臂长度：24~78m |
| 超起 | Y型，安装在基本臂端部，双倍率超起钢丝绳设计，使超起拉力成倍提升。大臂长状态下挠度减小20%~30%，起重性能成倍提升。 |
| 风电臂头 | 桁架式结构，风电臂长度：14m |

技术规格

Technical specifications



上车


无线遥控装置 进行起重机主动作及辅助动作的远程操作，提高操作的方便性及安全性


臂头监视器 臂头监视器装在起重机臂头的位置，采用高清晰摄像头及显示器，无线方式传输信号；主要用来观察吊钩的吊装情况，可根据吊重物的远近自动调焦。

臂内监视器 臂内监视器装在伸臂内油缸上，采用高清晰摄像头及显示器，无线方式传输信号；主要用来观察伸臂内臂销的插拔过程。

技术规格


Technical specifications


|  | Chassis |
|--|--|
| Frame | Designed and manufactured by XCMG, made of high strength steel with box cross-section. |
| Outriggers | 4 outriggers are in H-shaped arrangement. Equipped with outrigger pressure sensor. Outrigger beams and jacks are hydraulically controlled. There is an outrigger control station located at each side of the chassis, and there is a level gauge, an illuminator and speed buttons on each control station. There is a check valve fitted in each outrigger cylinder, and a double-way hydraulic valve fitted in each jack cylinder. |
| Engine | Mercedes engine OM473LA.E5-1 Rated power 480KW/1800rpm Max. torque 3100Nm/1200-1400rpm. compliant with Eu Stage V emission standard. |
| Hydraulic system | The variable displacement pump is connected to the engine through PTO for controlling the movements of outriggers, steering, suspension and heat dissipation. |
| Transmission | ZF Electrical-control automatic transmission with torque converter and retarder brake; 12 forward gears and 2 reverse gears available. |
| Transfer gear | Zhuzhou Gear Mechanical transfer gear |
| Axles | Dajiang high strength axles, equipped with pneumatic disc brake, with Axle 3-6 for driving and full-axle steering. |

|  | Chassis |
|---|---|
| Suspension | Hydro-pneumatic suspension system has good shock-absorbing effect. Various functions such as automatic leveling, moving up and down of suspension, and switching over of elastic and rigid suspension. The stroke of suspension cylinder is -120mm~+130mm. |
| Tires | 12 tires, each axle is equipped with single tire, with large bearing capacity. Tire specifications: 445/95R25 (16.00R25). |
| Steering | All axles steering, 1~2 axles: the mechanical and hydraulic power steering; 3~6 axles: the electro-hydraulic control steering. It is suitable for various demands of working conditions and various steering modes can be realized. |
| Brakes | Service brake: dual-circuit air pressure brake, acting on all wheels. Parking brake: spring-loaded brake, acting on the wheels of axles 2~6. Auxiliary brake: engine brake and transmission retarder brake. |
| Driver's cab | New full dimension steel structure cab. Safety glass, electrically operated door window lifters, adjustable seats, electrical adjustable rear-view mirrors, steering wheel adjustable in height and angle, and large screen liquid crystal display are equipped. New type of combined control panel is reasonably and ergonomically arranged in arch shape. Heater and air conditioner are standard. |
| Electrical System | DC 24 V, with 2 sets of 12 V batteries in series. |

技术规格


Technical specifications

|  | Superstructure |
|--|---|
| Frame | Designed and manufactured by XCMG, made of high strength steel. |
| Hydraulic system | Electric proportional variable pump is used for lifting and slewing operations; the open pump is used for telescoping and luffing operations. Imported electro-hydraulic change valve, matching perfectly and stably with plunger variable pump. Large power air-cooled hydraulic oil cooler, which may effectively reduce the oil temperature in the system. |
| Control system | The electric proportional pilot control system is equipped with two levers at left and right sides controlling all movements of the crane, and stepless speed regulation is available. |
| Main winch system | Driven by a hydraulic motor, with built-in planetary gear reducer and constant closed brake. Drum with Lebus grooves, imported wire rope and pouch socket are available. |
| Slewing system | Three-point roller external tooth slewing ring with a dual slewing mechanism is driven by hydraulic motor, with built-in planetary gear reducer and constant-closed brake equipped, and may continuously slew 360°. Power control and free slewing function as well as stepless speed regulation are available. |
| Operator's cab | Large arc glass, sliding door, adjustable seat, safety glass, top protective rails, LMI, controller box, electric windshield wipers, engine accelerator pedal, engine start switch and sun shield for roof window and rear window, etc. are available. Heater and air conditioner are standard. |
| Safety devices | Hydraulic balance valve, hydraulic relief valve, hydraulic double-way valve, LMI, joystick spring return system are available. Lowering limiter is equipped in winch to prevent rope over-releasing. Anti-two block is fitted on the boom head to prevent rope over-winding. Anemometer is equipped to check whether aerial wind velocity is in safe working range. Winch monitor is for real-time monitoring of winch running. |
| Combined counterweight | The total weight reaches 153 t. Ten counterweight combinations of 0 t, 20 t, 40 t, 60 t, 80 t, 100 t, 120 t, 140 t, 150 t and 153 t are available. |

|  | Superstructure |
|---|--|
| LMI | When the actual load moment is approaching the limit value, audible and visual warning will be sent out, and the dangerous operation will be automatically stopped before overloading. Overload memory function (black box) and fault self-diagnosis function are available. |
| Electrical System | DC 24 V, PLC programmable controller, CAN bus control network; the control system has real-time detection and fault self-diagnosis functions. |
| Hook blocks | 225 t hook block (double hook) 175 t hook block (double hook) 90 t hook block (double hook) 40 t hook block 13.5 t hook block |
| Luffing winch jib | It mainly consists of the luffing sheave block and is used for the luffing of the luffing jib. |
| Boom | 7-section boom with U cross-section, welding structure. Single cylinder pinning telescoping system is adopted. One double-acting cylinder with safety valve is used for controlling the telescoping movements of all boom sections with 46%, 92% and fully-extended telescoping pattern available. Boom length: 16.1 m~85 m. |
| Fixed jib | Lattice welding structure with 0°, 20°, 40° and 60° offset angles available. Fixed jib length: 6 m~42 m. |
| Luffing jib | Lattice welding structure; three boom angles: 68°, 75°, 82°. Luffing jib length: 24 m~78 m. |
| Super-lifting device | Y-shaped, installed at top of base boom, wire rope with double parts of line contributes to twofold pulling force. With the boom extended out, the deflection can be decreased by 20%~30%, multiplying the lifting performance. |
| Wind power jib head | Lattice structure; jib length: 14 m |

技术规格

Technical specifications

|  | Superstructure |
|--|---|
| Wireless remote controller | The wireless controller can remote control the main operation and auxiliary operation of crane, improving the convenience and security during operation. |
| Boom head monitor | The boom head monitor is installed in the boom head of the crane. It is equipped with a high-definition camera and a display and transmits signals by wireless means. The monitor is mainly used to observe the loading of the hook blocks and can adjust focus automatically according to the distance of the loads. |
| Inner boom monitor | The inner boom monitor is installed in the cylinder of the telescopic boom. It is equipped with a high-definition camera and a display and transmits signals by wireless means. The monitor is mainly used to observe the insertion and pull of the boom pins of the telescopic boom. |

车型与选装件

Version and optional equipment

| 车型 | 功能描述 | 选择 |
|------|---|----|
| 标准型 | 主臂+超起配置+风电臂，七节主臂85m | |
| 增强型 | 主臂+超起+风电臂+固定副臂配置，七节主臂85m,固定副臂42m | |
| 全工况型 | 主臂+超起+风电臂+固定副臂+变幅副臂配置，七节主臂85m，固定副臂42m，变幅副臂78m | |

| 可选装件 | | 选择 |
|-------|-----------------|----|
| 吊钩 | 225吨钩 | |
| OBU装置 | OnKey193D-O11FA | 国六 |

Version and optional equipment

| Version | Function description | Selection |
|---------------------------|--|-----------|
| Standard | Boom + super lifting device + Wind power jib (7-section boom of 85 m) | |
| Strengthened | Boom+ super lifting device + wind power jib + fixed jib (7-section boom of 85 m, fixed jib of 42 m) | |
| Full configuration | Boom + super lifting device + wind power jib + fixed jib + luffing jib (7-section boom of 85 m, fixed jib of 42 m and a luffing jib of 78 m) | |

| Optional equipment | | Selection |
|--------------------|-----------------|-----------|
| Hook block | 225 t | |
| OBU | OnKey193D-O11FA | China VI |

重量 Weight



| 车桥 Axle | 1 | 2 | 3 | 4 | 5 | 6 | 总重量 Total weight |
|------------|------|------|------|------|------|------|---------------------|
| t | 12 | 12 | 12 | 12 | 12 | 12 | 72 ¹⁾ |
| t | 16.5 | 16.5 | 16.5 | 16.2 | 16.2 | 16.2 | 98 ²⁾ |
| t | 23.2 | 23.2 | 23.2 | 18.9 | 18.9 | 18.9 | 126 ³⁾ |

1) 72t: 上车不带3-7节吊臂、平衡重、超起、起重吊钩、固定副臂、变幅副臂、风电臂；下车不带后固定支腿及后活动腿、备胎及支架；
驱动行驶：12×8；轮胎规格445/95R25

1) 72 t: Superstructure: 3~7 boom sections, counterweight, super lifting device, hook blocks, and wind power jib are not excluded; Chassis: rear outrigger boxes and beams, spare tire and its bracket are not excluded.
Driving mode: 12×8; tire specification: 445/95R25

2) 98t: 72t状态+3-7节吊臂、后活动支腿以及后固定支腿、备胎及支架；
驱动行驶：12×8；轮胎规格445/95R25

2) 98 t: 72 t configuration + 3rd~7th boom sections, main winch and its wire rope, front and rear outrigger beams, rear outrigger boxes, spare tire and its bracket
Driving mode: 12×8; tire specification: 445/95R25

3) 126t: 72t状态+3-7节吊臂、超起、后活动支腿以及后固定支腿、备胎及支架、10t平衡重、支脚盘
驱动行驶：12×8；轮胎规格445/95R25

3) 126 t: 72 t configuration + 3rd~7th boom sections, super lifting device, main winch and its wire rope, front and rear outrigger beams, rear outrigger boxes, spare tire and its bracket, 10 t counterweight and outrigger floats
Driving mode: 12×8; tire specification: 445/95R25

表中正常重量及桥荷为装配445/95R25轮胎时的值；
The GVW and axle loads listed above are the values when 445/95R25 tires are equipped.



| 吊钩 Hook block | 倍率 Parts of line | 吊钩重量 Weight (kg) | 吊钩尺寸 Dimensions (mm) | 备注 Remarks |
|------------------|---------------------|---------------------|-------------------------|----------------|
| 225t | 20 | 4000 | 2509×1362×900 | 双钩 Double hook |
| 175 t | 15 | 3000 | 2216.5×1155×835 | 双钩 Double hook |
| 90 t | 7 | 1900 | 2157×1000×780 | 双钩 Double hook |
| 40 t | 3 | 1300 | 2004×700×573 | 单钩 Single hook |
| 13.5 t | 1 | 500 | 900×500×500 | 单钩 Single hook |

作业速度 Working speed



445/95 R 25 (16.00 R 25)



2 ~ 80










52%



| 作业机构 Operation mechanism | 作业速度 Working speed | 最大单绳拉力 Max. single line pull | 钢丝绳直径/长度 Rope diameter/ length |
|--------------------------------|--|---------------------------------|-----------------------------------|
| | 0-120 m/min, 单绳, 第5层, 空载 m/min, single line, 5th layer, no load | 13.5 t | 24 mm/620mm |
| | 0-1.2 r/min | | |
| | 从-0.5°抬起至82°约100s Approx. 100s for boom luffing from -0.5° to 82° | | |
| | 从16.1m伸出至85m约1300s Approx. 1300s for boom extension from 16.1 m to 85 m | | |






运输部件尺寸

Dimension and weight of parts transported
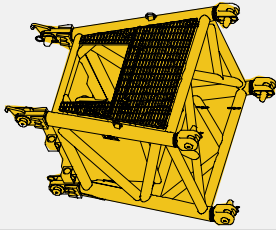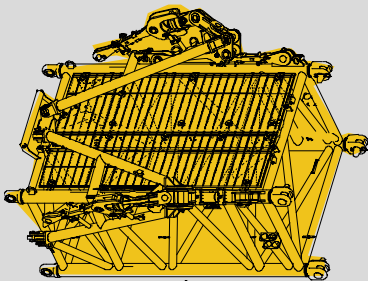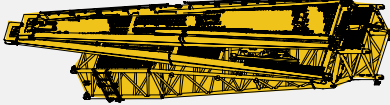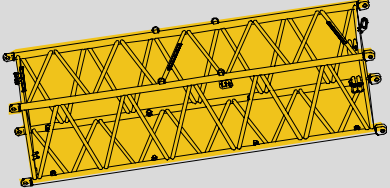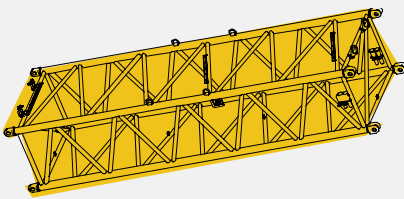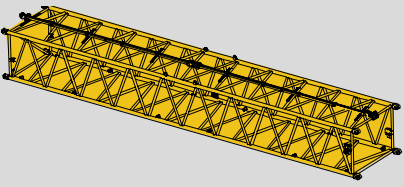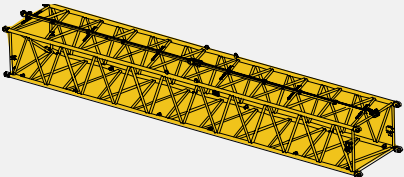
| 名称 Part Name | 图示 Figure | 单重 Weight (kg) | 数量 Quantity | 尺寸 Dimensions (mm) |
|--|---|-------------------|----------------|-----------------------|
| 连接架 (末节臂) Connecting bracket (last boom section) |  | 1100 | 1 | 2000×1900×1800 |
| 翼式连接架 Wing-type connecting bracket |  | 2280 | 1 | 3800×2700×2000 |
| 安装组件 Installation assembly |  | 8200 | 1 | 12300×2000×3000 |
| 加长节I Jib insert I |  | 880 | 2 | 6300×1800×1500 |
| 加长节II Jib insert II |  | 830 | 2 | 6300×1600×1200 |
| 加长节III Jib insert III |  | 1550 | 2 | 12300×1800×1500 |
| 加长节IV Jib insert IV |  | 1450 | 2 | 12300×1600×1200 |







运输部件尺寸

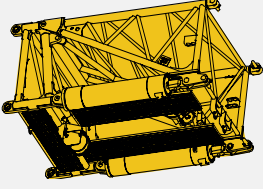Dimension and weight of parts transported

| 名称 Part Name | 图示 Figure | 单重 Weight (kg) | 数量 Quantity | 尺寸 Dimensions (mm) |
|--|---|---|----------------|-----------------------|
| 过渡节 Transition section |  | 330 | 1 | 2000×1800×1500 |
| 臂头总成 Boom head assembly |  | 680 | 1 | 2400×1600×1800 |
| 变幅起升机构 Winch for luffing jib |  | 5870 (标配Standard) /5906 (选配Optional) | 1 | 2290×1495×1750 |
| 连接架(五节臂) Connecting bracket (5 th boom section) |  | 1000 | 1 | 2100×1900×1900 |
| 旋转架 Rotating bracket |  | 2050 | 1 | 4400×2000×2300 |
| 臂头小车 Pulley cart |  | 980 | 1 | 2500×2100×1600 |
| 拉板总成 Pendant assembly |  | 1750 | 1 | 7000×620×650 |
| 腰绳总成 Center hitch assembly |  | 130 | 1 | — |

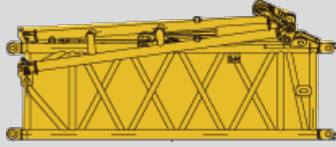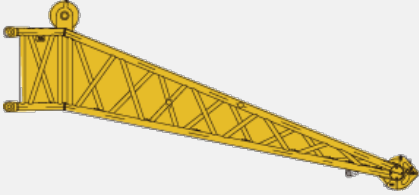




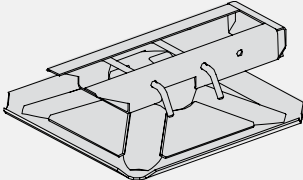
运输部件尺寸

Dimension and weight of parts transported


| 名称 Part Name | | 图示 Figure | 单重 Weight (kg) | 数量 Quantity | 尺寸 Dimensions (mm) |
|------------------------------|---------------------------------------|---|-------------------|----------------|-----------------------|
| 风电臂 Wind power jib | 连接架 Connecting bracket |  | 950 | 1 | 2300×1400×1700 |
| | 翼式连接架 Wing-type connecting bracket |  | 3500 | 1 | 5300×2500×2200 |
| | 风电臂头 Wind power jib head |  | 1970 | 1 | 7800×1400×2300 |
| 超起装置 Super lifting device | |  | 18000 | 1 | 11000×3000×1650 |
| 2-7节臂 2-7 boom sections | |  | 28000 | 1 | 16200×2200×2200 |
| 3-7节臂 3-7 boom sections | |  | 22000 | 1 | 15900×2200×2200 |

运输部件尺寸

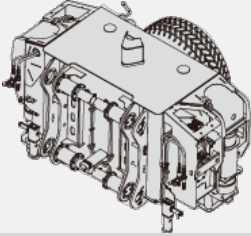Dimension and weight of parts transported

| 名称 Part Name | 图示 Figure | 单重 Weight (kg) | 数量 Quantity | 尺寸 Dimensions (mm) |
|--|---|-------------------|----------------|---------------------------------|
| 后固定支腿 (含两组后 活动支腿总成、备胎及 备胎支架) Rear outrigger box (including 2 sets of rear outrigger beam assembly, spare tire and its bracket) |  | 8920 | 1 | 2030×2980×2144 |
| 前活动支腿总成 Front outrigger beam assembly |  | 2142 | 2 | 423×995×2923 |
| 配重支架 Counterweight bracket |  | 25 | 1 | 400×200×300 |
| |  | 25 | 1 | 150×700×300 |
| 超起托架 Super lifting device bracket |  | 37 | 2 | 630×300×300 + 675×300×300 |
| 前支脚盘 Front outrigger float |  | 62 | 2 | 176×600×681 |

平衡重 Counterweight

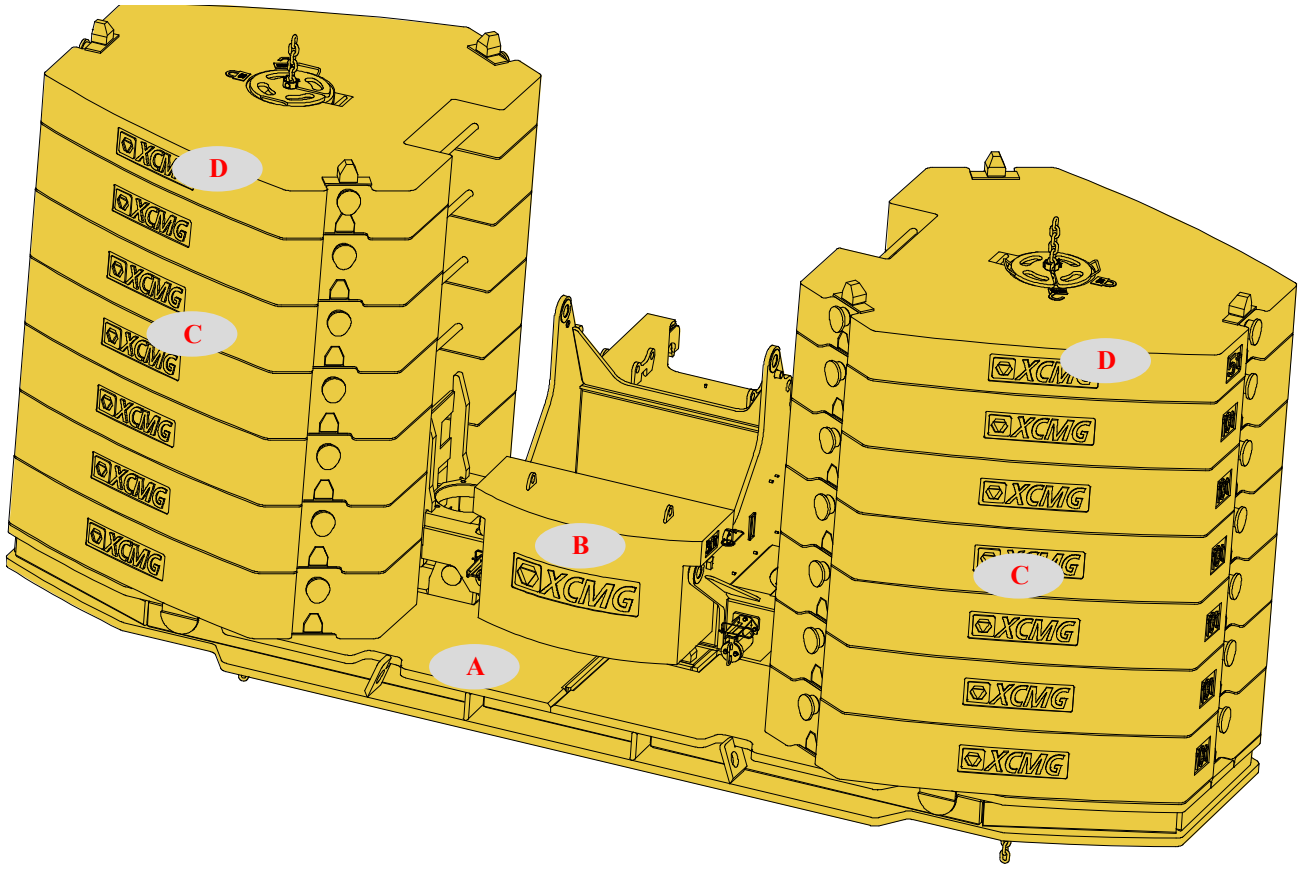

| 平衡重 Counterweight | A | B | C | D |
|----------------------|----------------|--------------|---------------|---------------|
| 尺寸 (长×宽×高) mm | 6988×2790×2025 | 1400×835×623 | 2552×2350×515 | 2552×2350×410 |
| Size (L×W×H) mm | | | | |
| 重量 t | 20 | 3 | 10 | 5 |
| Weight (t) | | | | |

| 工况模式 Working mode | 153 t | 150 t | 140 t | 120 t | 100 t |
|----------------------|--------------------------------|------------------------------|-----------------|-----------------|----------------|
| 组合形式 Combinations | $A+B+C \times 12 + D \times 2$ | $A+C \times 12 + D \times 2$ | $A+C \times 12$ | $A+C \times 10$ | $A+C \times 8$ |

| 工况模式 Working mode | 80 t | 60 t | 40 t | 20 t | 0 t |
|----------------------|----------------|----------------|----------------|------|-----|
| 组合形式 Combinations | $A+C \times 6$ | $A+C \times 4$ | $A+C \times 2$ | A | — |


臂架组合方案

Boom / Jib combinations


风电臂-14m
Wind power jib-14m




固定副臂 - 6m
Fixed jib - 6m



固定副臂 - 12m
Fixed jib - 12m




固定副臂 - 18m
Fixed jib - 18m




固定副臂 - 24m
Fixed jib - 24m




固定副臂 - 30m
Fixed jib - 30m



固定副臂 - 36m
Fixed jib - 36m




固定副臂 - 42m
Fixed jib - 42m




臂架组合方案

Boom / Jib combinations


变幅副臂 - 24m
Luffing jib - 24m




变幅副臂 - 30m
Luffing jib - 30m



变幅副臂 - 36m
Luffing jib - 36m




变幅副臂 - 42m
Luffing jib - 42m



变幅副臂 - 48m
Luffing jib - 48m




变幅副臂 - 54m
Luffing jib - 54m



变幅副臂 - 60m
Luffing jib - 60m




变幅副臂 - 66m
Luffing jib - 66m



变幅副臂 - 72m
Luffing jib - 72m



变幅副臂 - 78m
Luffing jib - 78m




臂架组合方案

Boom / Jib combinations

| 部件 Component | 结构形式 Structure | 尺寸 (长×宽×高) m Size (L×W×H) m | 重量 kg Weight kg |
|---------------------------------------|---|--------------------------------|--------------------|
| 连接架 I Connecting bracket I |  | 2.0×1.9×1.8 | 1100 |
| 翼型连接架 Wing-type connecting bracket |  | 3.8×2.7×2.0 | 2280 |
| 旋转架 Rotating bracket |  | 4.4×2.0×2.3 | 2050 |
| 连接架 II Connecting bracket II |  | 2.1×1.9×1.9 | 1000 |
| 安装组件 Installation assembly |  | 12.3×2.0×3.0 | 8200 |
| 副臂加长节 I Jib insert I |  | 6.3×1.8×1.5 | 880 |
| 副臂加长节 II Jib insert II |  | 6.3×1.6×1.2 | 830 |
| 副臂加长节 III Jib insert III |  | 12.3×1.8×1.5 | 1550 |
| 副臂加长节 IV Jib insert IV |  | 12.3×1.6×1.2 | 1450 |
| 过渡节 Transition section |  | 2.0×1.8×1.5 | 330 |
| 臂头 Head section |  | 2.4×1.6×1.8 | 680 |


臂架组合方案

Boom / Jib combinations

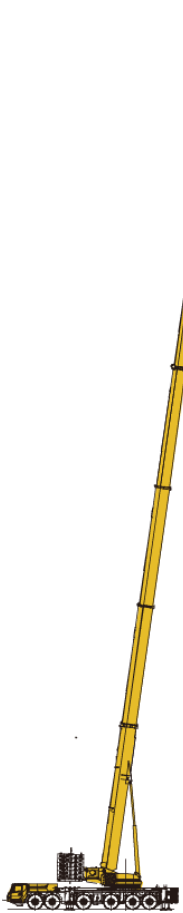

主臂
Boom

T: 16.1~85 m

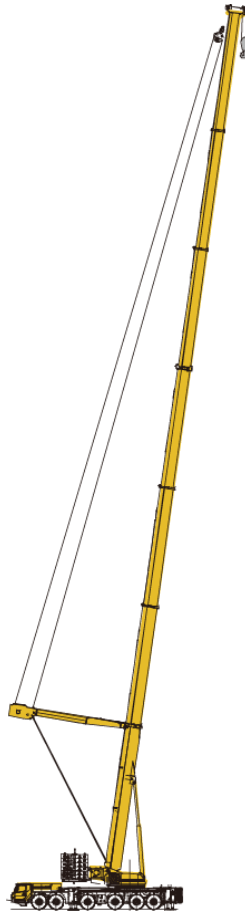

超起主臂 (选装)
Super lifting device (optional) + boom

T: 37.2~85 m





固定副臂 (选装)
Fixed jib(optional) + boom

T:16.1~79.5 m+3 m
F:6~42 m

臂架组合方案

Boom / Jib combinations

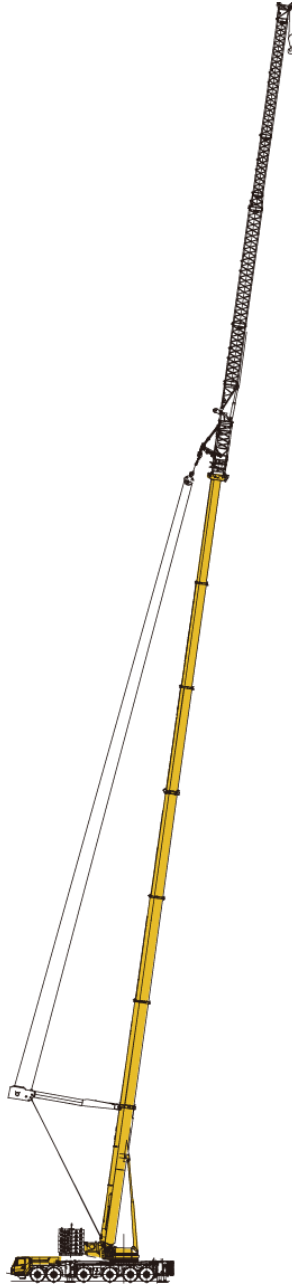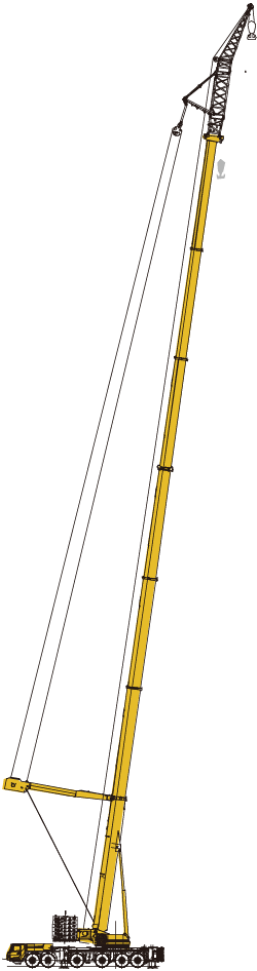

超起风电臂 (选装)

Super lifting device+ wind power jib (optional)

T: 37.2~85m
W: 14m

超起固定副臂 (选装)

Super lifting device + fixed Jib (optional)

T: 53.1~79.5 m+ 6.5 m
F: 6~42 m


超起变幅副臂 (选装)

Super lifting device+ luffing Jib (optional)

T: 31.4~57.8 m+ 7m
L: 24~78 m

起升高度曲线图
Lifting height chart


主臂
Boom

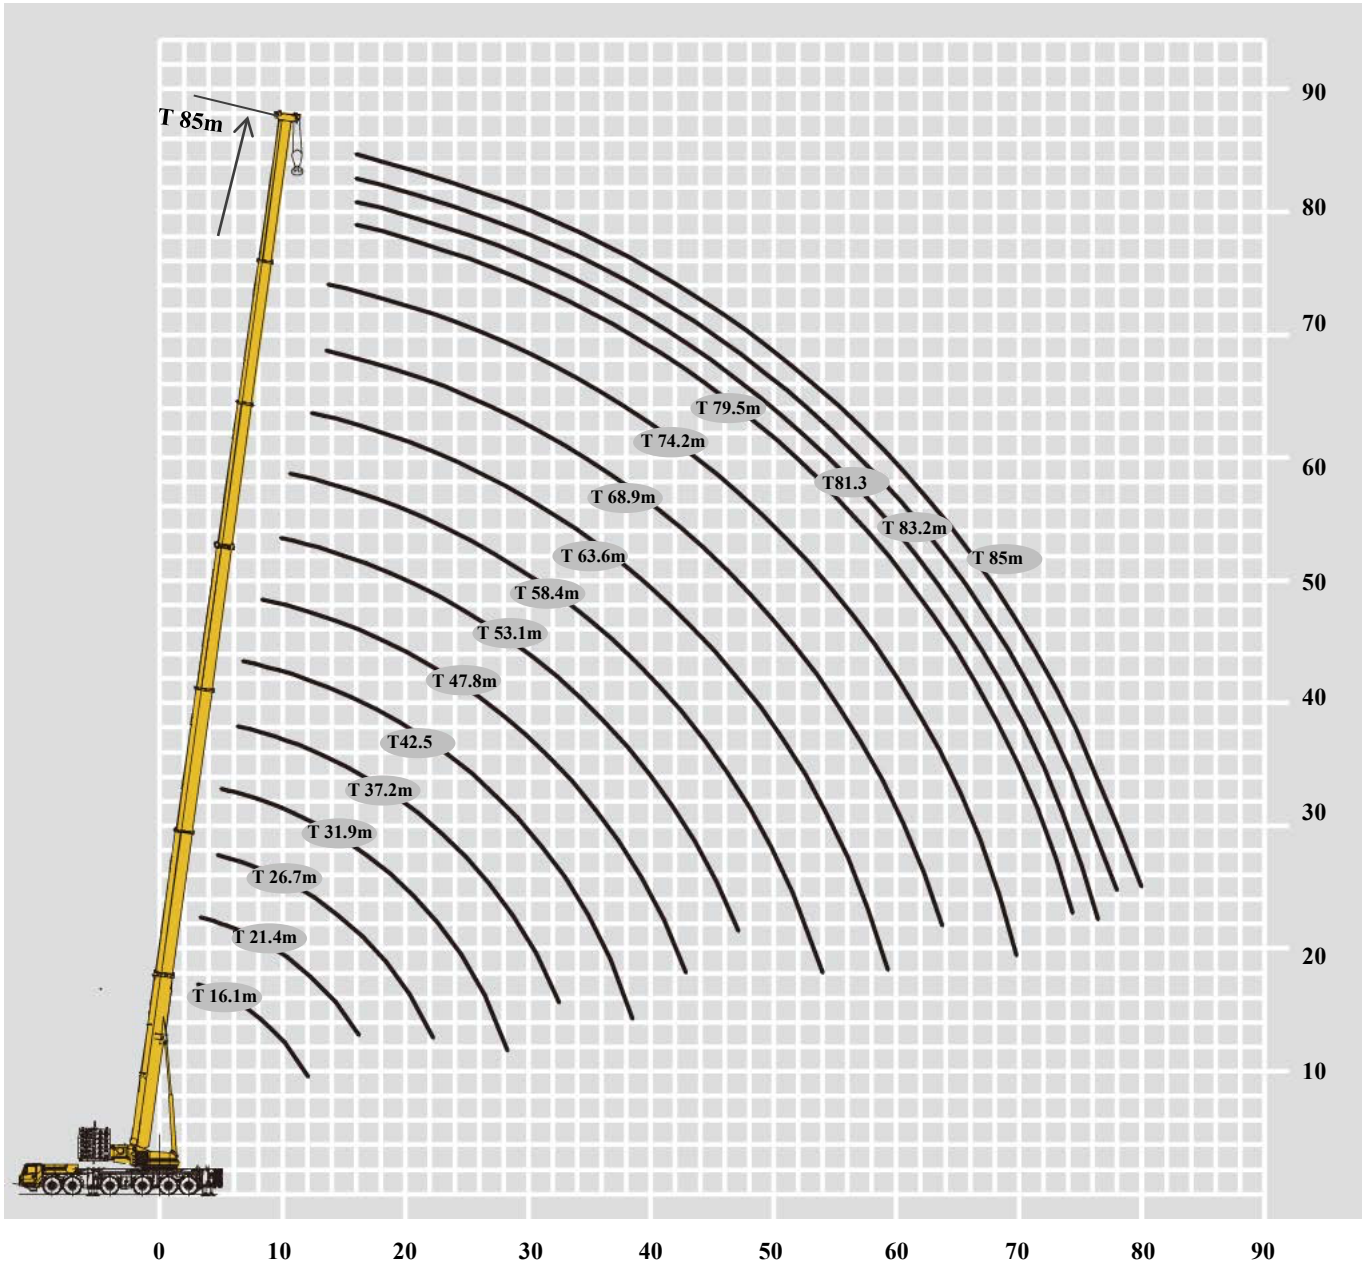

起重性能表

T 16.1~85m

Rated lifting load table



| | 16.1 | 21.4 | 21.4 | 21.4 | 21.4 | 26.7 | 26.7 | 26.7 | 26.7 | 26.7 | 31.9 | 31.9 | 31.9 | 37.2 | 37.2 | |
|---------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|---------|
| 3 | 500* | | | | | | | | | | | | | | | 3 |
| 3.5 | 225.0 | 225.0 | 225.0 | 225.0 | 100.9 | | | | | | | | | | | 3.5 |
| 4 | 225.0 | 225.0 | 225.0 | 225.0 | 95.7 | 193.3 | 193.3 | 193.3 | 100.1 | 69.2 | | | | | | 4 |
| 4.5 | 222.7 | 225.0 | 225.0 | 225.0 | 91.1 | 192.4 | 191.6 | 193.0 | 96.7 | 65.7 | 185.9 | 186.0 | 185.3 | | | 4.5 |
| 5 | 222.9 | 223.0 | 222.0 | 223.0 | 86.9 | 192.6 | 192.6 | 191.6 | 93.2 | 62.2 | 183.1 | 182.5 | 183.6 | | | 5 |
| 6 | 204.0 | 201.0 | 200.0 | 199.0 | 80.0 | 190.9 | 189.9 | 185.9 | 86.6 | 56.4 | 175.9 | 176.8 | 171.3 | 162.2 | 164.0 | 6 |
| 7 | 184.0 | 180.0 | 179.0 | 178.0 | 73.7 | 177.0 | 176.0 | 174.0 | 80.6 | 51.4 | 168.0 | 168.0 | 161.7 | 155.0 | 156.4 | 7 |
| 8 | 167.0 | 163.0 | 162.0 | 161.0 | 69.0 | 151.9 | 159.0 | 158.0 | 75.3 | 47.4 | 155.0 | 154.0 | 141.3 | 148.3 | 147.9 | 8 |
| 9 | 152.0 | 149.0 | 148.0 | 147.0 | 64.2 | 144.0 | 145.0 | 144.0 | 70.6 | 43.9 | 142.0 | 141.0 | 123.3 | 139.5 | 138.5 | 9 |
| 10 | 134.5 | 134.3 | 133.3 | 132.3 | 60.4 | 132.0 | 134.0 | 132.0 | 66.7 | 40.7 | 130.0 | 129.0 | 113.2 | 125.2 | 127.5 | 10 |
| 12 | 118.1 | 114.6 | 113.6 | 112.7 | 53.9 | 114.9 | 113.9 | 111.9 | 58.6 | 35.5 | 109.0 | 111.0 | 98.7 | 100.4 | 109.0 | 12 |
| 14 | | 97.0 | 96.0 | 95.0 | 48.8 | 98.0 | 97.0 | 95.0 | 51.5 | 31.6 | 92.9 | 94.5 | 82.1 | 90.5 | 95.3 | 14 |
| 16 | | 83.8 | 82.8 | 81.8 | 45.1 | 84.3 | 83.3 | 81.4 | 46.2 | 28.6 | 82.1 | 82.0 | 71.8 | 81.5 | 84.6 | 16 |
| 18 | | | | | | 75.3 | 73.0 | 71.3 | 41.7 | 26.0 | 70.1 | 71.3 | 63.3 | 74.0 | 72.6 | 18 |
| 20 | | | | | | 66.4 | 64.4 | 61.5 | 37.9 | 23.7 | 62.8 | 62.8 | 56.6 | 65.6 | 64.7 | 20 |
| 22 | | | | | | 59.4 | 57.4 | 55.0 | 34.8 | 22.2 | 55.9 | 54.9 | 51.6 | 58.3 | 57.7 | 22 |
| 24 | | | | | | | | | | | 50.0 | 48.9 | 49.0 | 54.3 | 50.8 | 24 |
| 26 | | | | | | | | | | | 44.8 | 44.1 | 44.1 | 49.5 | 45.8 | 26 |
| 28 | | | | | | | | | | | 38.8 | 38.9 | 37.5 | 44.1 | 42.8 | 28 |
| 30 | | | | | | | | | | | | | | 40.4 | 34.4 | 30 |
| 32 | | | | | | | | | | | | | | 37.1 | 35.5 | 32 |
| 组合 Code | 000000 | 001000 | 010000 | 100000 | 000001 | 001100 | 011000 | 110000 | 000011 | 000002 | 111000 | 120000 | 210000 | 011110 | 111100 | 组合 Code |
| 倍率 n | 20 | 20 | 20 | 20 | 9 | 17 | 17 | 17 | 9 | 6 | 16 | 16 | 16 | 14 | 14 | 倍率 n |


*表示起重能力等级。

Note: the lifting load with a * lifting capacity class.

起重性能表

T 16.1~85m

Rated lifting load table




| | 37.2 | 42.5 | 42.5 | 42.5 | 47.8 | 47.8 | 47.8 | 53.1 | 53.1 | 53.1 | 58.4 | 58.4 | 63.6 | 63.6 | 63.6 | |
|---------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|------------|
| 6 | 144.3 | | | | | | | | | | | | | | | 6 |
| 7 | 136.3 | 108.5 | 124.1 | 110.3 | | | | | | | | | | | | 7 |
| 8 | 124.4 | 101.5 | 117.5 | 104.7 | 80.6 | 104.1 | 104.2 | | | | | | | | | 8 |
| 9 | 110.0 | 95.1 | 110.6 | 99.8 | 74.8 | 100.9 | 100.6 | 61.8 | 68.3 | 71.4 | | | | | | 9 |
| 10 | 100.9 | 90.7 | 105.6 | 94.4 | 69.5 | 95.1 | 96.3 | 59.1 | 64.8 | 68.5 | 44.1 | 57.0 | | | | 10 |
| 12 | 84.3 | 83.3 | 95.0 | 84.3 | 59.9 | 86.7 | 82.0 | 53.1 | 59.1 | 62.8 | 40.0 | 50.5 | 39.8 | 40.8 | 46.7 | 12 |
| 14 | 73.9 | 74.4 | 87.2 | 68.7 | 52.9 | 77.1 | 72.7 | 48.2 | 55.0 | 58.4 | 36.7 | 45.1 | 37.9 | 38.8 | 45.6 | 14 |
| 16 | 64.7 | 66.6 | 80.5 | 60.4 | 46.9 | 69.5 | 59.5 | 44.1 | 51.0 | 54.0 | 33.7 | 41.4 | 36.2 | 37.6 | 41.9 | 16 |
| 18 | 57.1 | 61.0 | 73.6 | 53.8 | 42.4 | 63.5 | 53.1 | 41.1 | 46.1 | 50.7 | 30.5 | 38.0 | 32.8 | 34.9 | 40.0 | 18 |
| 20 | 51.4 | 56.2 | 65.7 | 48.6 | 38.1 | 56.6 | 47.7 | 37.9 | 42.6 | 47.8 | 28.6 | 35.4 | 30.4 | 32.3 | 36.7 | 20 |
| 22 | 45.7 | 51.6 | 58.7 | 43.8 | 34.6 | 51.9 | 43.2 | 35.2 | 40.3 | 45.1 | 27.0 | 33.7 | 28.3 | 29.7 | 35.0 | 22 |
| 24 | 40.8 | 47.6 | 53.7 | 40.1 | 32.1 | 48.1 | 39.6 | 33.1 | 38.3 | 42.1 | 25.2 | 31.2 | 26.5 | 28.5 | 32.9 | 24 |
| 26 | 38.0 | 44.1 | 47.7 | 36.2 | 29.6 | 44.2 | 37.2 | 31.2 | 35.9 | 39.7 | 23.6 | 29.8 | 24.8 | 26.5 | 31.5 | 26 |
| 28 | 33.8 | 41.1 | 42.8 | 32.5 | 26.9 | 40.0 | 32.6 | 29.3 | 30.7 | 36.4 | 22.4 | 28.7 | 23.2 | 25.2 | 29.3 | 28 |
| 30 | 31.2 | 38.1 | 39.5 | 29.6 | 25.3 | 38.2 | 29.1 | 27.7 | 30.2 | 33.0 | 21.3 | 26.8 | 21.6 | 23.3 | 27.8 | 30 |
| 32 | 30.9 | 35.3 | 36.2 | 27.3 | 23.6 | 34.7 | 26.4 | 26.1 | 28.4 | 30.5 | 20.3 | 25.2 | 20.7 | 22.0 | 26.5 | 32 |
| 34 | | 33.2 | 33.4 | 26.1 | 21.9 | 32.0 | 24.8 | 25.5 | 26.5 | 28.3 | 19.4 | 23.6 | 19.6 | 21.4 | 24.9 | 34 |
| 36 | | 30.9 | 31.0 | 24.8 | 20.6 | 30.2 | 23.0 | 23.7 | 25.4 | 26.2 | 18.5 | 22.1 | 18.5 | 20.1 | 23.6 | 36 |
| 38 | | 27.5 | 27.5 | 22.2 | 19.3 | 27.5 | 21.3 | 23.0 | 23.5 | 24.5 | 17.6 | 20.8 | 17.5 | 19.3 | 22.3 | 38 |
| 40 | | | | | 18.1 | 26.5 | 20.2 | 22.2 | 22.8 | 23.1 | 16.9 | 19.5 | 16.7 | 18.2 | 20.7 | 40 |
| 42 | | | | | 17.2 | 25.7 | 20.2 | 21.9 | 21.6 | 21.3 | 15.9 | 18.9 | 15.6 | 17.3 | 19.9 | 42 |
| 44 | | | | | | | | 21.0 | 20.1 | 19.9 | 15.3 | 17.8 | 15.2 | 16.4 | 19.4 | 44 |
| 46 | | | | | | | | 20.9 | 18.7 | 18.9 | 14.6 | 16.7 | 14.5 | 15.7 | 18.0 | 46 |
| 48 | | | | | | | | | | | 14.0 | 15.6 | 13.8 | 15.0 | 17.0 | 48 |
| 50 | | | | | | | | | | | 13.5 | 15.0 | 13.1 | 14.4 | 15.9 | 50 |
| 52 | | | | | | | | | | | 12.8 | 14.0 | 12.7 | 13.5 | 14.8 | 52 |
| 54 | | | | | | | | | | | | | 12.1 | 12.9 | 14.0 | 54 |
| 56 | | | | | | | | | | | | | 11.6 | 11.9 | 13.1 | 56 |
| 58 | | | | | | | | | | | | | 11.1 | 11.3 | 12.1 | 58 |
| 组合 Code | 211000 | 011111 | 111110 | 211100 | 021111 | 111111 | 211110 | 111112 | 111211 | 211111 | 111122 | 221111 | 111222 | 211122 | 221112 | 58 组合 Code |
| 倍率 n | 13 | 9 | 11 | 10 | 7 | 9 | 9 | 5 | 6 | 6 | 4 | 5 | 4 | 4 | 4 | 倍率 n |

起重性能表

T 16.1~85m


Rated lifting load table



| | 63.6 | 68.9 | 68.9 | 74.2 | 74.2 | 79.5 | 81.3 | 81.3 | 83.2 | 83.2 | 85 | |
|---------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|---------|
| 12 | 48.2 | | | | | | | | | | | 12 |
| 14 | 45.3 | 32.5 | 39.2 | 33.8 | 34.0 | | | | | | | 14 |
| 16 | 42.9 | 29.6 | 37.8 | 32.2 | 32.2 | 28.4 | 24.7 | 24.8 | 23.4 | 23.5 | 21.0 | 16 |
| 18 | 39.7 | 28.2 | 35.3 | 29.9 | 30.5 | 27.3 | 24.0 | 23.9 | 22.4 | 22.6 | 21.0 | 18 |
| 20 | 37.5 | 27.3 | 33.5 | 26.8 | 27.8 | 26.4 | 23.1 | 23.1 | 21.6 | 21.8 | 20.8 | 20 |
| 22 | 35.2 | 26.5 | 31.6 | 24.9 | 24.7 | 25.0 | 22.1 | 22.4 | 20.6 | 20.7 | 19.9 | 22 |
| 24 | 32.8 | 25.3 | 30.0 | 22.7 | 22.5 | 24.0 | 21.3 | 21.9 | 19.8 | 20.3 | 19.3 | 24 |
| 26 | 31.5 | 23.7 | 28.8 | 21.4 | 21.3 | 22.9 | 21.4 | 21.7 | 19.6 | 19.9 | 18.5 | 26 |
| 28 | 29.2 | 21.7 | 27.3 | 20.3 | 20.7 | 21.9 | 20.8 | 20.8 | 19.5 | 19.7 | 18.1 | 28 |
| 30 | 27.7 | 20.4 | 25.5 | 18.9 | 19.6 | 20.8 | 19.8 | 20.0 | 18.6 | 18.9 | 17.5 | 30 |
| 32 | 25.4 | 19.3 | 23.7 | 18.0 | 18.6 | 19.7 | 19.2 | 19.1 | 18.1 | 17.9 | 16.5 | 32 |
| 34 | 23.9 | 18.2 | 22.1 | 15.4 | 18.0 | 18.6 | 18.1 | 18.2 | 17.3 | 17.2 | 15.8 | 34 |
| 36 | 22.3 | 17.3 | 20.5 | 14.7 | 17.8 | 17.5 | 17.2 | 17.5 | 16.5 | 16.6 | 15.2 | 36 |
| 38 | 21.3 | 16.4 | 19.4 | 13.8 | 16.5 | 16.4 | 16.1 | 16.7 | 15.9 | 15.8 | 14.5 | 38 |
| 40 | 20.2 | 15.5 | 18.3 | 13.3 | 15.5 | 15.8 | 15.6 | 15.6 | 15.1 | 15.1 | 13.5 | 40 |
| 42 | 19.0 | 14.8 | 17.3 | 12.9 | 14.9 | 14.9 | 14.8 | 15.1 | 14.3 | 14.3 | 12.8 | 42 |
| 44 | 17.4 | 14.0 | 16.4 | 12.0 | 14.3 | 14.1 | 14.3 | 14.0 | 13.3 | 13.4 | 12.0 | 44 |
| 46 | 16.6 | 14.0 | 15.6 | 11.7 | 13.9 | 13.1 | 13.0 | 12.9 | 12.8 | 12.9 | 11.3 | 46 |
| 48 | 15.8 | 12.8 | 14.2 | 11.3 | 13.3 | 12.1 | 12.5 | 12.3 | 12.1 | 12.1 | 10.7 | 48 |
| 50 | 15.0 | 12.4 | 12.9 | 10.9 | 12.6 | 11.2 | 11.5 | 11.3 | 11.3 | 11.2 | 10.2 | 50 |
| 52 | 13.8 | 11.6 | 11.3 | 10.3 | 11.8 | 10.6 | 10.6 | 10.8 | 10.6 | 10.6 | 9.6 | 52 |
| 54 | 13.0 | 11.1 | 10.6 | 10.0 | 11.5 | 10.1 | 10.1 | 10.1 | 9.8 | 9.9 | 8.9 | 54 |
| 56 | 12.3 | 10.7 | 10.2 | 9.7 | 11.1 | 9.3 | 9.3 | 9.4 | 9.2 | 9.3 | 8.6 | 56 |
| 58 | 11.1 | 10.0 | 9.6 | 9.3 | 10.7 | 8.7 | 8.9 | 9.1 | 8.7 | 8.7 | 8.0 | 58 |
| 60 | | 9.6 | 8.8 | 9.4 | 10.6 | 8.1 | 8.2 | 8.2 | 7.9 | 8.2 | 7.5 | 60 |
| 62 | | 8.9 | 8.5 | 8.7 | 9.9 | 7.3 | 7.6 | 7.8 | 7.4 | 7.4 | 7.2 | 62 |
| 64 | | 7.8 | 6.7 | 8.3 | 9.9 | 6.9 | 7.0 | 7.0 | 7.1 | 6.9 | 6.7 | 64 |
| 66 | | | | 7.9 | 9.5 | 6.4 | 6.7 | 6.5 | 6.4 | 6.3 | 6.2 | 66 |
| 68 | | | | 7.7 | 8.8 | 5.7 | 6.0 | 6.0 | 6.0 | 5.9 | 5.8 | 68 |
| 70 | | | | 7.2 | 7.7 | 5.2 | 5.7 | 5.6 | 5.4 | 5.5 | 5.3 | 70 |
| 72 | | | | | | 4.8 | 5.1 | 5.0 | 5.0 | 4.8 | 4.7 | 72 |
| 74 | | | | | | 4.2 | 4.4 | 4.5 | 4.3 | 4.4 | 4.4 | 74 |
| 76 | | | | | | | 4.0 | 3.9 | 3.5 | 3.6 | 3.5 | 76 |
| 78 | | | | | | | | | 2.2 | 2.1 | 3.2 | 78 |
| 80 | | | | | | | | | | | 2.2 | 80 |
| 组合 Code | 222111 | 112222 | 222211 | 122222 | 222221 | 222222 | 222233 | 332222 | 223333 | 333322 | 333333 | 组合 Code |
| 倍率 n | 4 | 3 | 4 | 3 | 3 | 3 | 2 | 2 | 2 | 2 | 2 | 倍率 n |

起升高度曲线图
Lifting height chart


主臂+超起
Boom+ Super lifting device

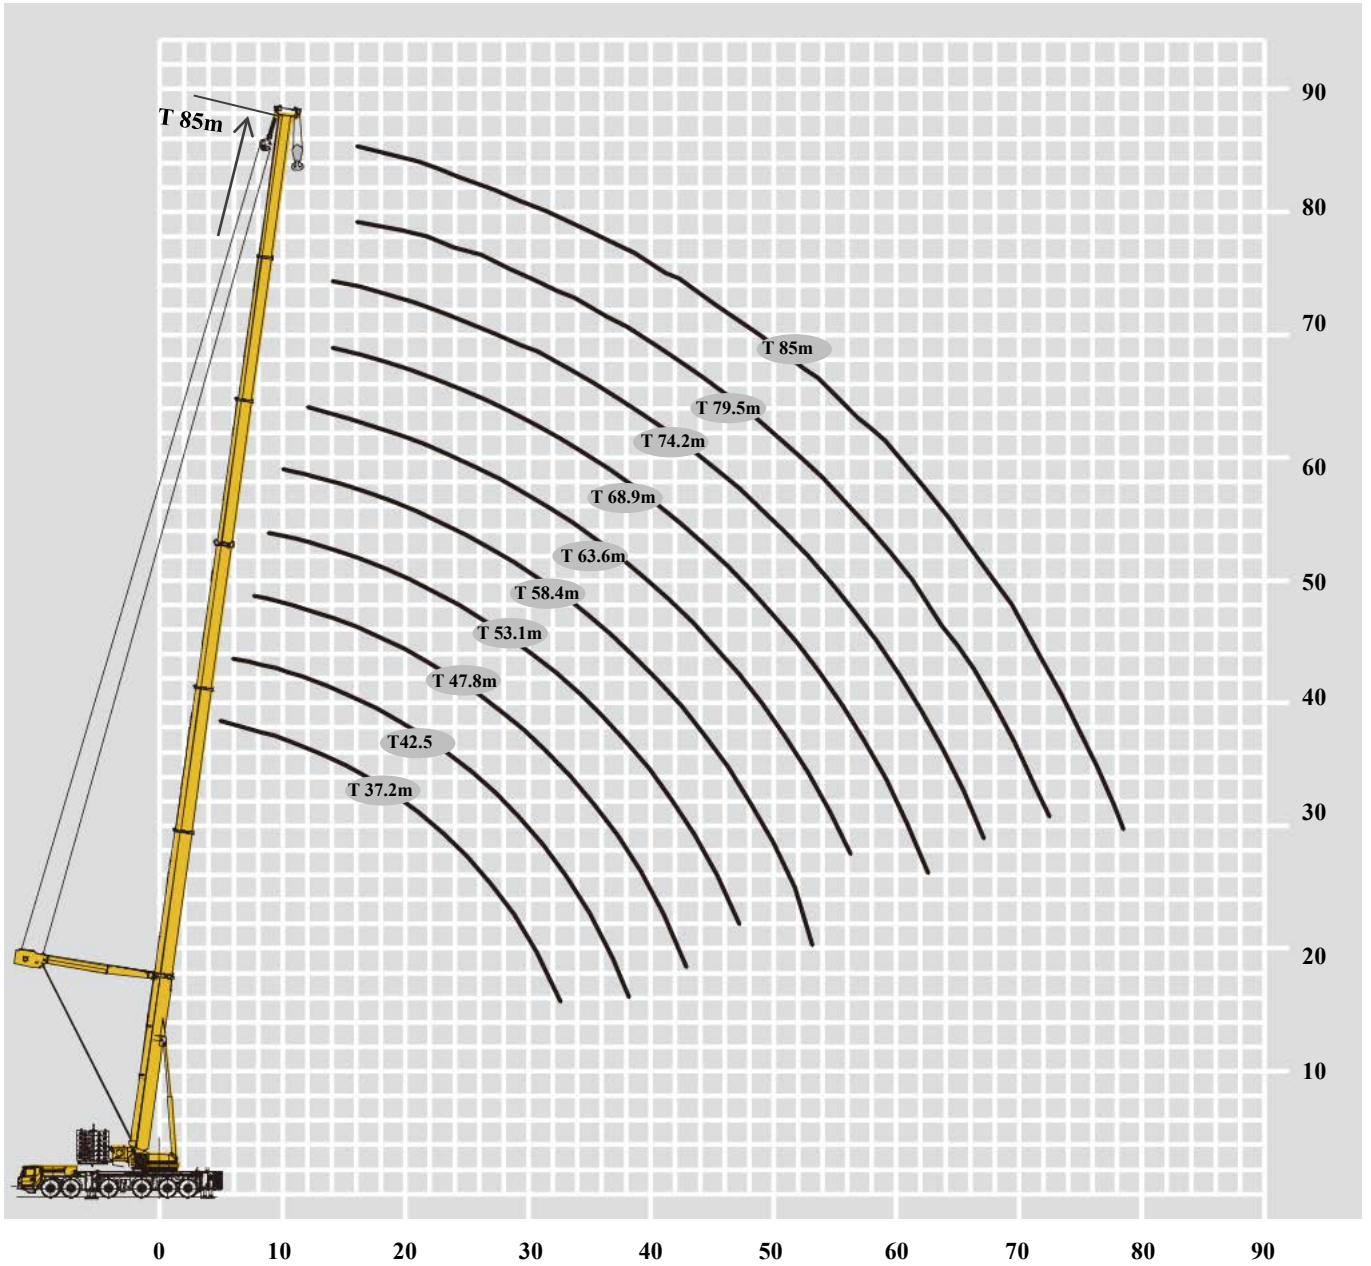

起重性能表

Rated lifting load table

T 37.2~85m






| | 37.2 | 42.5 | 42.5 | 47.8 | 53.1 | 53.1 | 58.4 | 58.4 | |
|---------|--------|--------|--------|--------|--------|--------|--------|--------|---------|
| 6 | 161.6 | | | | | | | | 6 |
| 7 | 160.6 | 139.0 | 139.0 | | | | | | 7 |
| 8 | 145.9 | 138.3 | 139.3 | 126.7 | 108.1 | 103.1 | | | 8 |
| 9 | 139.0 | 131.1 | 130.2 | 126.9 | 105.2 | 102.6 | | | 9 |
| 10 | 121.6 | 120.7 | 118.8 | 117.8 | 102.9 | 102.7 | 100.3 | 92.7 | 10 |
| 12 | 103.6 | 103.7 | 101.7 | 104.7 | 100.7 | 98.8 | 95.6 | 91.3 | 12 |
| 14 | 90.5 | 92.3 | 88.4 | 92.9 | 88.4 | 86.5 | 87.4 | 84.6 | 14 |
| 16 | 78.9 | 80.5 | 77.9 | 80.3 | 77.9 | 76.0 | 77.0 | 75.1 | 16 |
| 18 | 70.3 | 70.3 | 68.4 | 70.7 | 69.4 | 67.5 | 69.4 | 66.5 | 18 |
| 20 | 61.8 | 63.7 | 60.8 | 61.8 | 61.8 | 60.8 | 61.8 | 59.9 | 20 |
| 22 | 54.9 | 56.7 | 54.2 | 56.1 | 56.1 | 54.2 | 56.1 | 54.2 | 22 |
| 24 | 49.4 | 51.2 | 47.5 | 49.4 | 51.3 | 49.4 | 54.0 | 51.0 | 24 |
| 26 | 43.8 | 45.5 | 42.8 | 44.7 | 45.6 | 44.7 | 49.0 | 47.0 | 26 |
| 28 | 40.8 | 42.4 | 38.0 | 39.9 | 41.8 | 39.9 | 45.0 | 42.0 | 28 |
| 30 | 36.0 | 38.9 | 34.2 | 36.1 | 38.0 | 36.1 | 41.0 | 38.0 | 30 |
| 32 | 32.4 | 34.7 | 31.4 | 33.3 | 34.2 | 32.3 | 37.0 | 35.0 | 32 |
| 34 | | 32.0 | 28.5 | 30.4 | 31.4 | 29.5 | 34.0 | 31.0 | 34 |
| 36 | | 29.0 | 25.7 | 28.0 | 28.5 | 27.6 | 31.0 | 29.0 | 36 |
| 38 | | 23.3 | 19.4 | 25.8 | 26.6 | 24.7 | 29.0 | 26.0 | 38 |
| 40 | | | | 23.7 | 24.7 | 22.8 | 27.0 | 24.0 | 40 |
| 42 | | | | 20.8 | 22.8 | 20.9 | 25.0 | 22.0 | 42 |
| 44 | | | | | 20.9 | 19.0 | 23.0 | 20.0 | 44 |
| 46 | | | | | 19.0 | 17.1 | 21.0 | 18.0 | 46 |
| 48 | | | | | | | 20.0 | 16.7 | 48 |
| 50 | | | | | | | 18.0 | 15.0 | 50 |
| 52 | | | | | | | 15.3 | 12.6 | 52 |
| 组合 Code | 011110 | 011111 | 111110 | 111111 | 111112 | 211111 | 111122 | 221111 | 组合 Code |
| 倍率 n | 14 | 12 | 12 | 11 | 9 | 9 | 9 | 8 | 倍率 n |

起重性能表

Rated lifting load table


T 37.2~85m



|  | 63.6 | 63.6 | 68.9 | 68.9 | 74.2 | 74.2 | 79.5 | 85 |  |
|---|--------|--------|--------|--------|--------|--------|--------|--------|---|
| 12 | 95.4 | 94.7 | | | | | | | 12 |
| 14 | 86.5 | 83.6 | 81.1 | 82.7 | 71.7 | 72.3 | | | 14 |
| 16 | 76.0 | 74.1 | 74.3 | 73.2 | 70.3 | 71.7 | 65.2 | 52.0 | 16 |
| 18 | 68.4 | 65.6 | 67.5 | 65.6 | 65.1 | 64.6 | 60.6 | 50.1 | 18 |
| 20 | 61.8 | 58.9 | 60.8 | 58.9 | 59.9 | 58.9 | 57.0 | 47.6 | 20 |
| 22 | 56.1 | 53.2 | 55.1 | 53.2 | 54.2 | 53.2 | 53.2 | 45.0 | 22 |
| 24 | 50.4 | 48.5 | 50.4 | 48.5 | 49.4 | 48.5 | 48.5 | 42.7 | 24 |
| 26 | 46.6 | 43.7 | 45.6 | 43.7 | 45.6 | 43.7 | 43.7 | 40.7 | 26 |
| 28 | 42.8 | 39.9 | 44.0 | 39.9 | 41.8 | 40.9 | 40.9 | 38.6 | 28 |
| 30 | 40.0 | 38.0 | 40.0 | 38.0 | 37.1 | 36.1 | 38.0 | 35.2 | 30 |
| 32 | 37.0 | 34.0 | 37.0 | 34.0 | 34.2 | 33.3 | 35.0 | 32.3 | 32 |
| 34 | 34.0 | 31.0 | 34.0 | 32.0 | 31.4 | 30.4 | 32.0 | 30.4 | 34 |
| 36 | 32.0 | 29.0 | 31.0 | 29.0 | 29.5 | 27.6 | 30.0 | 27.6 | 36 |
| 38 | 29.0 | 26.0 | 29.0 | 27.0 | 26.6 | 25.7 | 27.0 | 25.7 | 38 |
| 40 | 27.0 | 24.0 | 27.0 | 25.0 | 24.7 | 23.8 | 25.0 | 25.0 | 40 |
| 42 | 25.0 | 22.0 | 25.0 | 23.0 | 22.8 | 21.9 | 24.0 | 23.0 | 42 |
| 44 | 23.0 | 20.0 | 23.0 | 21.0 | 21.9 | 20.0 | 22.0 | 22.0 | 44 |
| 46 | 22.0 | 19.0 | 22.0 | 19.0 | 20.0 | 19.0 | 20.0 | 20.0 | 46 |
| 48 | 20.0 | 17.0 | 20.0 | 18.0 | 19.0 | 17.1 | 19.0 | 19.0 | 48 |
| 50 | 19.0 | 15.6 | 19.0 | 16.0 | 17.1 | 16.2 | 18.0 | 18.0 | 50 |
| 52 | 17.0 | 14.0 | 17.0 | 14.9 | 16.2 | 15.1 | 16.0 | 16.0 | 52 |
| 54 | 16.0 | 12.7 | 16.0 | 13.5 | 15.2 | 13.7 | 15.0 | 15.0 | 54 |
| 56 | 14.5 | 11.4 | 14.9 | 12.2 | 14.0 | 12.5 | 14.0 | 14.0 | 56 |
| 58 | | | 13.7 | 11.0 | 12.8 | 11.4 | 13.0 | 13.0 | 58 |
| 60 | | | 12.6 | 9.9 | 11.8 | 10.3 | 11.8 | 12.0 | 60 |
| 62 | | | 10.9 | 8.3 | 10.8 | 9.3 | 10.8 | 11.0 | 62 |
| 64 | | | | | 9.8 | 8.4 | 9.8 | 10.1 | 64 |
| 66 | | | | | 9.0 | 7.5 | 8.9 | 9.2 | 66 |
| 68 | | | | | | | 8.1 | 8.3 | 68 |
| 70 | | | | | | | 7.2 | 7.5 | 70 |
| 72 | | | | | | | 6.3 | 6.8 | 72 |
| 74 | | | | | | | | 6.1 | 74 |
| 76 | | | | | | | | 5.4 | 76 |
| 78 | | | | | | | | 4.1 | 78 |
| 组合 Code | 011110 | 011111 | 111110 | 111111 | 111112 | 211111 | 111122 | 221111 | 组合 Code |
| 倍率 n | 8 | 8 | 7 | 7 | 6 | 6 | 6 | 5 | 倍率 n |

起升高度曲线图
Lifting height chart


主臂+风电臂
Boom + Wind power jib

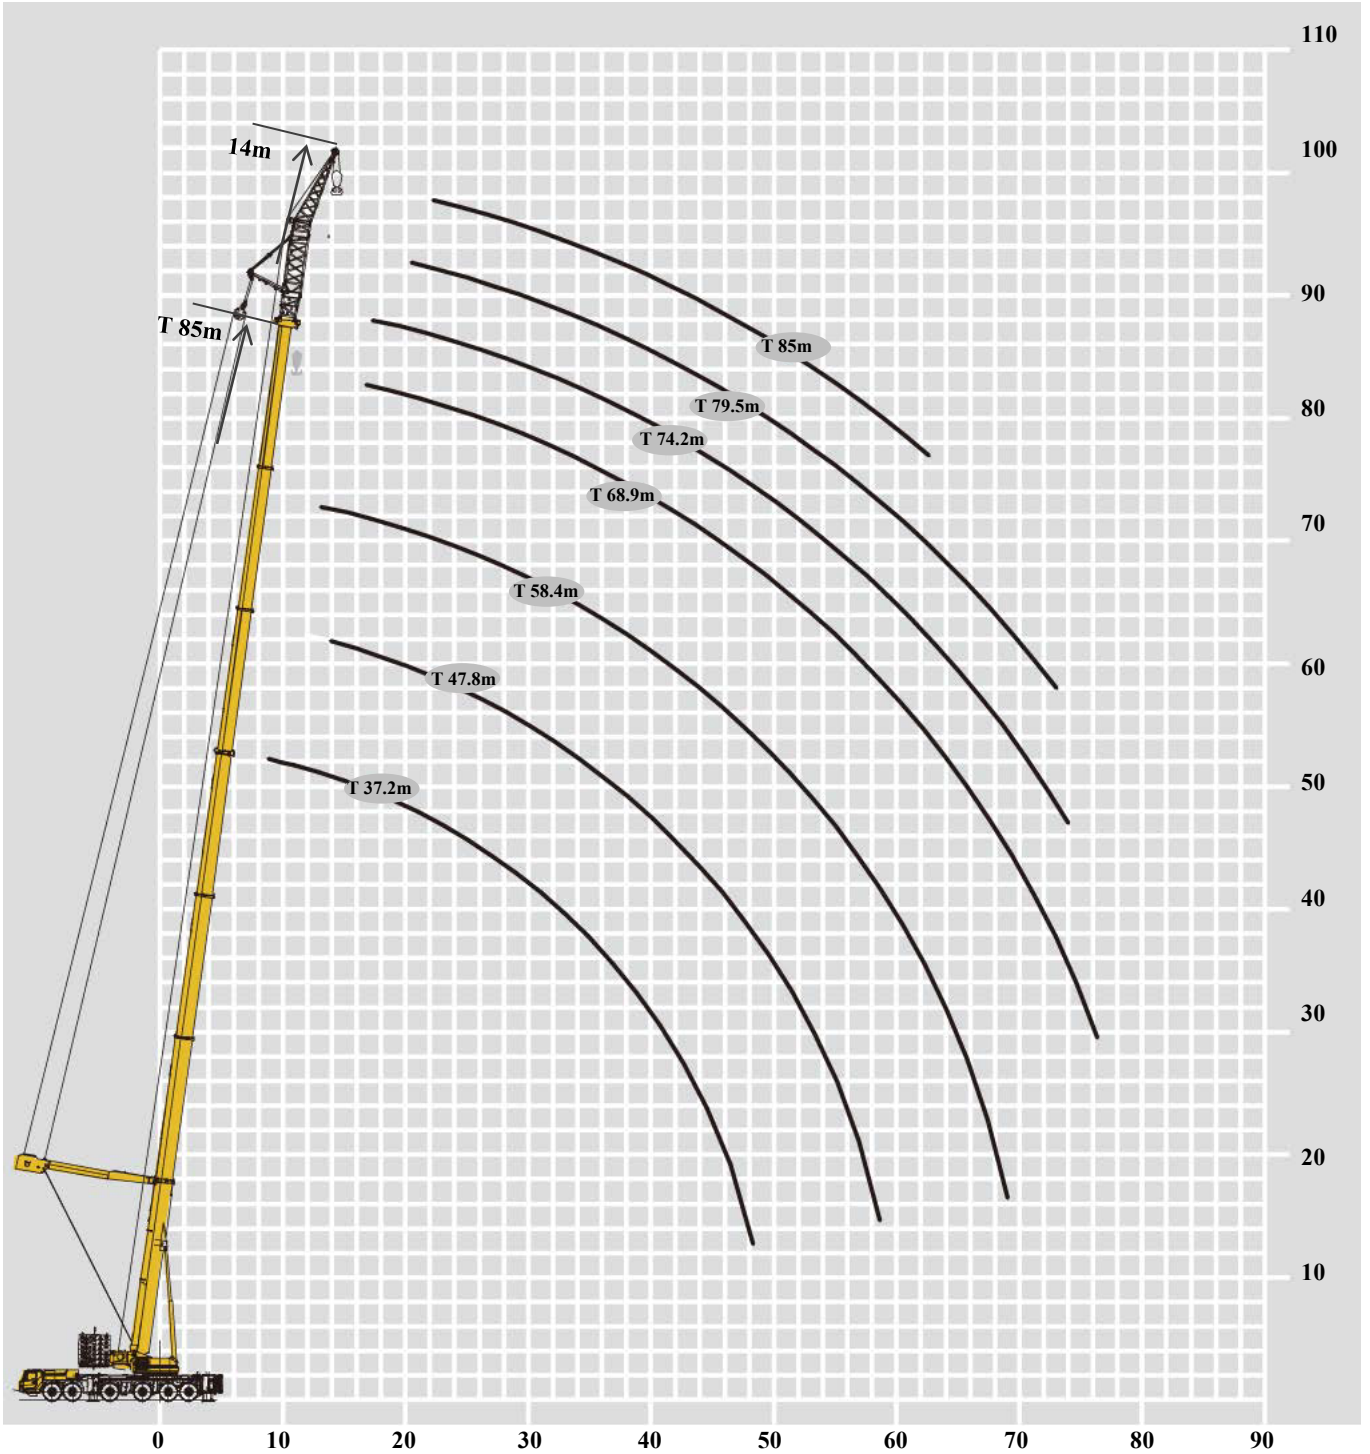



起重性能表

Rated lifting load table

T 37.2~85m




|  | 37.2 | 47.8 | 58.4 | 68.9 | 74.2 | 79.5 | 85 |  |
|--|-------|------|------|------|------|------|------|---|
| | 14m | 14m | 14m | 14m | 14m | 14m | 14m | |
| 8 | 100.7 | | | | | | | 8 |
| 9 | 96.8 | | | | | | | 9 |
| 10 | 93.0 | | | | | | | 10 |
| 12 | 86.8 | 89.4 | | | | | | 12 |
| 14 | 81.8 | 84.7 | 76.0 | 66.0 | | | | 14 |
| 16 | 76.5 | 75.5 | 73.4 | 62.6 | 58.7 | 47.8 | | 16 |
| 18 | 69.4 | 67.3 | 66.3 | 57.8 | 52.5 | 46.1 | | 18 |
| 20 | 62.2 | 61.2 | 60.2 | 52.3 | 49.0 | 44.2 | 37.9 | 20 |
| 22 | 56.1 | 56.1 | 54.1 | 46.8 | 44.7 | 41.0 | 34.9 | 22 |
| 24 | 52.0 | 51.0 | 50.0 | 41.5 | 40.3 | 36.8 | 32.0 | 24 |
| 26 | 46.9 | 46.9 | 45.9 | 37.2 | 37.7 | 32.6 | 28.8 | 26 |
| 28 | 43.9 | 42.8 | 41.8 | 34.3 | 34.2 | 28.4 | 26.1 | 28 |
| 30 | 39.8 | 39.8 | 38.8 | 30.5 | 30.0 | 25.3 | 22.6 | 30 |
| 32 | 36.7 | 35.7 | 35.7 | 27.5 | 27.6 | 23.0 | 19.8 | 32 |
| 34 | 33.7 | 33.7 | 32.6 | 25.6 | 24.5 | 20.7 | 16.8 | 34 |
| 36 | 30.6 | 30.6 | 29.6 | 22.8 | 21.5 | 19.2 | 15.2 | 36 |
| 38 | 28.6 | 28.6 | 27.5 | 21.0 | 19.5 | 17.7 | 13.2 | 38 |
| 40 | 26.5 | 26.5 | 25.5 | 19.2 | 17.5 | 16.2 | 12.4 | 40 |
| 42 | 24.5 | 24.5 | 23.5 | 17.4 | 16.4 | 13.9 | 11.0 | 42 |
| 44 | 22.4 | 22.4 | 22.4 | 16.5 | 14.6 | 11.9 | 9.7 | 44 |
| 46 | 21.4 | 22.0 | 21.0 | 15.2 | 13.1 | 10.6 | 8.9 | 46 |
| 48 | 14.6 | 20.0 | 20.0 | 14.4 | 12.1 | 8.7 | 7.8 | 48 |
| 50 | | 18.9 | 17.9 | 12.7 | 11.1 | 7.6 | 7.1 | 50 |
| 52 | | 17.5 | 16.8 | 11.9 | 9.6 | 7.5 | 6.5 | 52 |
| 54 | | 15.8 | 15.8 | 11.0 | 8.6 | 7.0 | 5.8 | 54 |
| 56 | | 14.3 | 14.4 | 10.1 | 7.8 | 6.6 | 4.8 | 56 |
| 58 | | 10.0 | 13.1 | 9.1 | 6.9 | 6.2 | 4.1 | 58 |
| 60 | | | 12.0 | 8.2 | 6.2 | 5.8 | 3.4 | 60 |
| 62 | | | 10.9 | 7.5 | 5.6 | 5.0 | 2.7 | 62 |

起重性能表

Rated lifting load table


T 37.2~85m



| | 37.2 | 47.8 | 58.4 | 68.9 | 74.2 | 79.5 | 85 | |
|---------|--------|--------|--------|--------|--------|--------|--------|---------|
| | 14m | 14m | 14m | 14m | 14m | 14m | 14m | |
| 64 | | | 9.9 | 6.6 | 4.9 | 4.4 | 2.2 | 64 |
| 66 | | | 8.8 | 5.9 | 4.3 | 3.8 | | 66 |
| 68 | | | 5.9 | 5.3 | 3.8 | 3.3 | | 68 |
| 70 | | | | 4.6 | 3.3 | 2.7 | | 70 |
| 72 | | | | 4.0 | 2.8 | 2.3 | | 72 |
| 74 | | | | 3.5 | 2.3 | | | 74 |
| 76 | | | | 2.9 | | | | 76 |
| 组合 Code | 000022 | 000222 | 002222 | 022222 | 122222 | 222222 | 333333 | 组合 Code |
| 倍率 n | 8 | 7 | 6 | 6 | 5 | 4 | 3 | 倍率 n |

起升高度曲线图 Lifting height chart


主臂+副臂
Boom + Jib

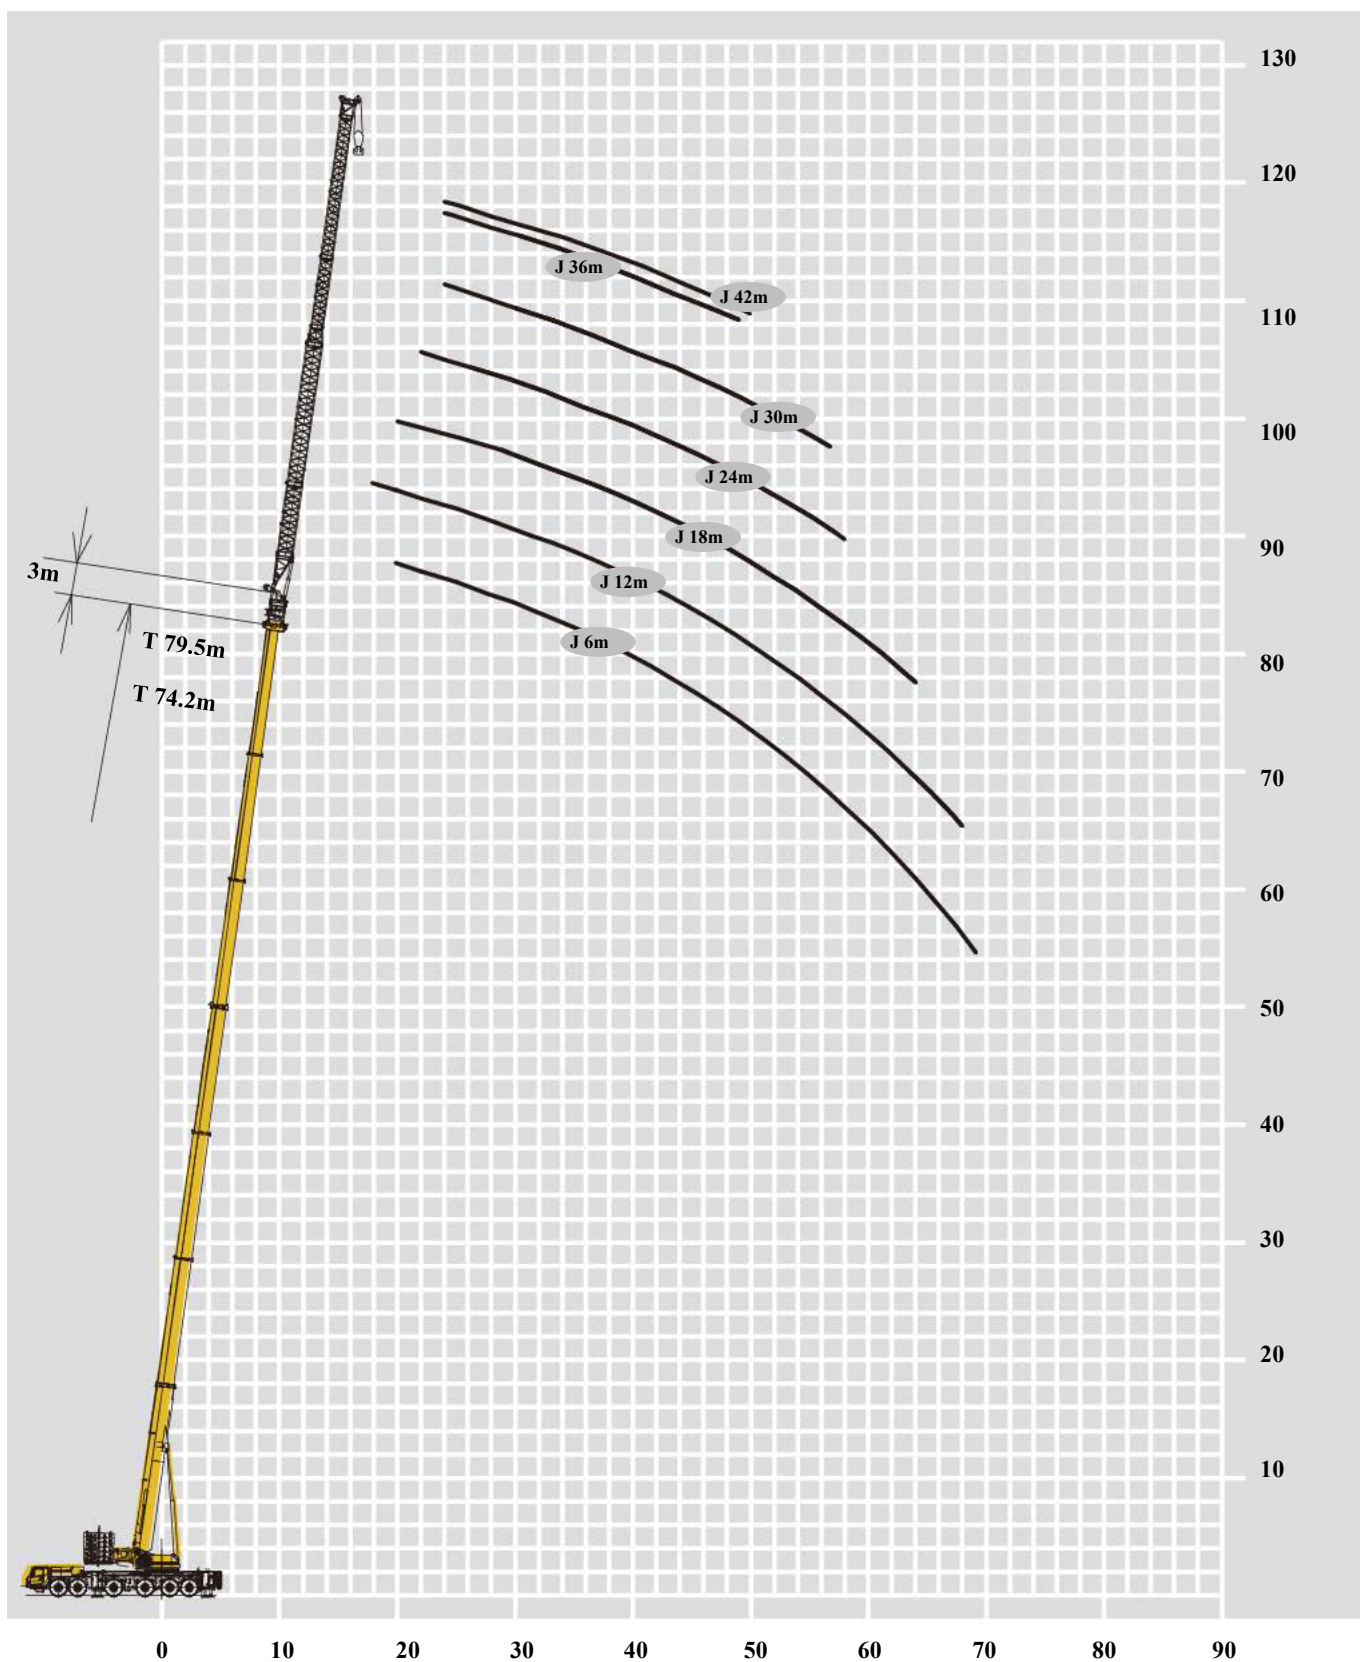



起重性能表

Rated lifting load table

T 16.1~74.2m




| |  | | | | | |  |
|---------|--|----------|----------|----------|----------|----------|---|
| | 16.1+3 m | 53.1+3 m | 58.4+3 m | 63.6+3 m | 68.9+3 m | 74.2+3 m | |
| | 0° | | | | | | |
| | 42 m | | | | | | |
| 10 | 16.2 | | | | | | 10 |
| 12 | 13.8 | | | | | | 12 |
| 14 | 12.0 | | | | | | 14 |
| 16 | 11.0 | | | | | | 16 |
| 18 | 9.9 | 10.4 | | | | | 18 |
| 20 | 8.8 | 10.4 | 9.2 | | | | 20 |
| 22 | 7.9 | 9.9 | 9.2 | 8.3 | 7.0 | | 22 |
| 24 | 7.3 | 9.5 | 9.2 | 8.3 | 7.0 | 4.9 | 24 |
| 26 | 6.6 | 9.1 | 8.9 | 8.3 | 7.0 | 4.9 | 26 |
| 28 | 6.1 | 8.8 | 8.5 | 8.1 | 7.0 | 4.9 | 28 |
| 30 | 5.6 | 8.4 | 8.2 | 7.8 | 7.0 | 4.9 | 30 |
| 32 | 5.2 | 8.1 | 7.9 | 7.5 | 6.9 | 4.9 | 32 |
| 34 | 4.8 | 7.6 | 7.5 | 7.3 | 6.7 | 4.9 | 34 |
| 36 | 4.4 | 7.3 | 7.3 | 7.0 | 6.2 | 4.9 | 36 |
| 38 | 4.2 | 6.9 | 7.0 | 6.7 | 5.6 | 4.4 | 38 |
| 40 | 3.9 | 6.5 | 6.7 | 6.3 | 5.1 | 4.0 | 40 |
| 42 | 3.7 | 6.1 | 6.4 | 5.9 | 4.6 | 3.6 | 42 |
| 44 | 3.4 | 5.8 | 6.1 | 5.2 | 4.2 | 3.2 | 44 |
| 46 | 3.1 | 5.6 | 5.9 | 4.8 | 3.8 | 2.9 | 46 |
| 48 | 3.0 | 5.4 | 5.6 | 4.4 | 3.3 | 2.6 | 48 |
| 50 | 2.8 | 5.1 | 5.3 | 4.0 | 3.0 | 2.2 | 50 |
| 52 | 2.6 | 4.9 | 4.9 | 3.6 | 2.7 | | 52 |
| 54 | 2.5 | 4.7 | 4.6 | 3.4 | 2.4 | | 54 |
| 56 | 2.4 | 4.5 | 4.2 | 3.0 | 2.1 | | 56 |
| 58 | | 4.2 | 4.0 | 2.8 | | | 58 |
| 60 | | 4.1 | 3.6 | 2.5 | | | 60 |
| 62 | | 3.9 | 3.3 | 2.3 | | | 62 |
| 64 | | 3.7 | 3.1 | 2.0 | | | 64 |
| 66 | | 3.6 | 2.9 | | | | 66 |
| 68 | | 3.4 | 2.6 | | | | 68 |
| 70 | | 3.3 | 2.3 | | | | 70 |
| 72 | | 3.1 | 2.1 | | | | 72 |
| 74 | | 3.0 | | | | | 74 |
| 76 | | 2.9 | | | | | 76 |
| 78 | | 2.6 | | | | | 78 |
| 80 | | 2.5 | | | | | 80 |
| 82 | | 2.4 | | | | | 82 |
| 84 | | 2.1 | | | | | 84 |
| 组合 Code | 000000 | 211111 | 221111 | 222111 | 222211 | 222221 | 组合 Code |
| 倍率 n | 2 | 1 | 1 | 1 | 1 | 1 | 倍率 n |

起重性能表

T 16.1~79.5m

Rated lifting load table




| | <div style="display: flex; justify-content: space-between; width: 100%;"> 16.1+3 m 53.1+3 m 58.4+3 m 63.6+3 m 68.9+3 m 74.2+3 m 79.5+3 m </div> | | | | | | | |
|---------|--|--------|--------|--------|--------|--------|--------|---------|
| | 0° | | | | | | | |
| | 36 m | | | | | | | |
| 9 | 19.7 | | | | | | | 9 |
| 10 | 18.6 | | | | | | | 10 |
| 12 | 15.9 | | | | | | | 12 |
| 14 | 13.9 | | | | | | | 14 |
| 16 | 12.2 | 12.6 | | | | | | 16 |
| 18 | 11.0 | 12.6 | 11.7 | | | | | 18 |
| 20 | 10.3 | 12.1 | 11.7 | 10.2 | 8.4 | | | 20 |
| 22 | 9.4 | 11.7 | 11.2 | 10.2 | 8.4 | 6.1 | | 22 |
| 24 | 8.5 | 11.1 | 10.8 | 10.2 | 8.4 | 6.1 | 4.2 | 24 |
| 26 | 7.8 | 10.8 | 10.5 | 9.9 | 8.4 | 6.1 | 4.2 | 26 |
| 28 | 7.2 | 10.4 | 10.1 | 9.6 | 8.4 | 6.1 | 4.2 | 28 |
| 30 | 6.6 | 9.8 | 9.7 | 9.2 | 8.3 | 6.0 | 4.2 | 30 |
| 32 | 6.2 | 9.3 | 9.4 | 9.0 | 7.8 | 6.0 | 4.2 | 32 |
| 34 | 5.7 | 8.9 | 9.0 | 8.6 | 7.2 | 5.9 | 4.2 | 34 |
| 36 | 5.3 | 8.5 | 8.5 | 7.9 | 6.6 | 5.4 | 4.1 | 36 |
| 38 | 5.0 | 8.0 | 8.2 | 7.3 | 5.9 | 4.9 | 4.0 | 38 |
| 40 | 4.7 | 7.6 | 7.8 | 6.6 | 5.3 | 4.5 | 3.7 | 40 |
| 42 | 4.4 | 7.2 | 7.4 | 6.1 | 4.9 | 4.1 | 3.2 | 42 |
| 44 | 4.2 | 6.8 | 7.0 | 5.7 | 4.5 | 3.7 | 2.9 | 44 |
| 46 | 3.9 | 6.5 | 6.7 | 5.1 | 4.1 | 3.3 | 2.6 | 46 |
| 48 | 3.7 | 6.2 | 6.3 | 4.7 | 3.7 | 2.9 | 2.3 | 48 |
| 50 | 3.5 | 6.0 | 5.7 | 4.4 | 3.3 | 2.6 | | 50 |
| 52 | | 5.7 | 5.3 | 4.0 | 3.1 | 2.4 | | 52 |
| 54 | | 5.4 | 5.1 | 3.6 | 2.7 | 2.1 | | 54 |
| 56 | | 5.2 | 4.6 | 3.4 | 2.5 | | | 56 |
| 58 | | 5.0 | 4.3 | 3.1 | 2.2 | | | 58 |
| 60 | | 4.8 | 3.9 | 2.8 | 2.0 | | | 60 |
| 62 | | 4.6 | 3.7 | 2.4 | | | | 62 |
| 64 | | 4.4 | 3.4 | 2.2 | | | | 64 |
| 66 | | 4.1 | 3.2 | 2.0 | | | | 66 |
| 68 | | 4.0 | 2.9 | | | | | 68 |
| 70 | | 3.9 | 2.7 | | | | | 70 |
| 72 | | 3.7 | 2.4 | | | | | 72 |
| 74 | | 3.4 | 2.2 | | | | | 74 |
| 76 | | 3.2 | 2.0 | | | | | 76 |
| 78 | | 3.1 | | | | | | 78 |
| 80 | | 2.9 | | | | | | 80 |
| 82 | | 2.6 | | | | | | 82 |
| 84 | | 2.4 | | | | | | 84 |
| 组合 Code | 000000 | 211111 | 221111 | 222111 | 222211 | 222221 | 222222 | 组合 Code |
| 倍率 n | 2 | 1 | 1 | 1 | 1 | 1 | 1 | 倍率 n |

起重性能表

Rated lifting load table

T 16.1~79.5m




| m | 16.1+3 m | 53.1+3 m | 58.4+3 m | 63.6+3 m | 68.9+3 m | 74.2+3 m | 79.5+3 m | m |
|---------|----------|----------|----------|----------|----------|----------|----------|---------|
| | 0° | | | | | | | |
| | 30 m | | | | | | | |
| 8 | 23.2 | | | | | | | 8 |
| 9 | 21.4 | | | | | | | 9 |
| 10 | 20.1 | | | | | | | 10 |
| 12 | 17.3 | | | | | | | 12 |
| 14 | 15.1 | | | | | | | 14 |
| 16 | 13.4 | 15.3 | | | | | | 16 |
| 18 | 12.0 | 15.3 | 14.0 | 12.7 | | | | 18 |
| 20 | 10.9 | 14.6 | 14.0 | 12.7 | 10.1 | | | 20 |
| 22 | 10.2 | 14.0 | 13.5 | 12.7 | 10.1 | 7.5 | | 22 |
| 24 | 9.4 | 13.4 | 13.0 | 12.2 | 10.1 | 7.5 | 5.4 | 24 |
| 26 | 8.6 | 12.7 | 12.5 | 11.9 | 10.1 | 7.5 | 5.4 | 26 |
| 28 | 7.9 | 11.9 | 12.0 | 11.6 | 9.8 | 7.5 | 5.4 | 28 |
| 30 | 7.4 | 11.2 | 11.5 | 10.9 | 9.1 | 7.4 | 5.4 | 30 |
| 32 | 6.9 | 10.6 | 10.9 | 10.1 | 8.3 | 7.2 | 5.4 | 32 |
| 34 | 6.5 | 10.0 | 10.3 | 9.3 | 7.7 | 6.4 | 5.3 | 34 |
| 36 | 6.0 | 9.5 | 9.7 | 8.5 | 7.1 | 5.9 | 5.1 | 36 |
| 38 | 5.6 | 9.1 | 9.3 | 7.9 | 6.4 | 5.3 | 4.6 | 38 |
| 40 | 5.3 | 8.6 | 8.9 | 7.3 | 5.8 | 4.9 | 4.2 | 40 |
| 42 | 5.0 | 8.2 | 8.3 | 6.7 | 5.4 | 4.5 | 3.8 | 42 |
| 44 | 4.8 | 7.8 | 7.8 | 6.2 | 5.0 | 4.1 | 3.4 | 44 |
| 46 | | 7.5 | 7.3 | 5.6 | 4.6 | 3.7 | 3.1 | 46 |
| 48 | | 7.1 | 6.7 | 5.2 | 4.1 | 3.4 | 2.9 | 48 |
| 50 | | 6.9 | 6.2 | 4.8 | 3.7 | 3.0 | 2.5 | 50 |
| 52 | | 6.6 | 5.8 | 4.5 | 3.5 | 2.8 | 2.3 | 52 |
| 54 | | 6.4 | 5.4 | 4.2 | 3.1 | 2.5 | 2.1 | 54 |
| 56 | | 6.1 | 5.1 | 3.8 | 2.9 | 2.3 | | 56 |
| 58 | | 5.8 | 4.7 | 3.6 | 2.7 | 2.1 | | 58 |
| 60 | | 5.6 | 4.3 | 3.2 | 2.2 | | | 60 |
| 62 | | 5.4 | 4.1 | 2.9 | 2.0 | | | 62 |
| 64 | | 5.2 | 3.8 | 2.7 | | | | 64 |
| 66 | | 5.0 | 3.5 | 2.5 | | | | 66 |
| 68 | | 4.7 | 3.2 | 2.3 | | | | 68 |
| 70 | | 4.3 | 3.0 | 2.1 | | | | 70 |
| 72 | | 4.1 | 2.6 | | | | | 72 |
| 74 | | 3.9 | 2.3 | | | | | 74 |
| 76 | | 3.6 | 2.0 | | | | | 76 |
| 78 | | 3.4 | | | | | | 78 |
| 组合 Code | 000000 | 211111 | 221111 | 222111 | 222211 | 222221 | 222222 | 组合 Code |
| 倍率 n | 2 | 2 | 2 | 1 | 1 | 1 | 1 | 倍率 n |

起重性能表

T 16.1~79.5m

Rated lifting load table




| m | 16.1+3 m | 53.1+3 m | 58.4+3 m | 63.6+3 m | 68.9+3 m | 74.2+3 m | 79.5+3 m | m |
|---------|----------|----------|----------|----------|----------|----------|----------|---------|
| | 0° | | | | | | | |
| | 24m | | | | | | | |
| 7 | 30.9 | | | | | | | 7 |
| 8 | 28.1 | | | | | | | 8 |
| 9 | 25.9 | | | | | | | 9 |
| 10 | 23.9 | | | | | | | 10 |
| 12 | 20.9 | | | | | | | 12 |
| 14 | 18.5 | | | | | | | 14 |
| 16 | 16.4 | 19.5 | | | | | | 16 |
| 18 | 14.7 | 18.5 | 17.7 | 16.0 | 12.4 | | | 18 |
| 20 | 13.2 | 17.4 | 16.9 | 16.0 | 12.4 | 8.9 | | 20 |
| 22 | 12.1 | 16.4 | 16.0 | 15.3 | 12.4 | 8.9 | 6.6 | 22 |
| 24 | 11.2 | 15.5 | 15.3 | 14.7 | 12.3 | 8.9 | 6.6 | 24 |
| 26 | 10.6 | 14.5 | 14.6 | 13.7 | 11.9 | 8.9 | 6.6 | 26 |
| 28 | 10.0 | 13.7 | 13.9 | 12.5 | 10.7 | 8.9 | 6.6 | 28 |
| 30 | 9.3 | 13.0 | 13.1 | 11.6 | 9.7 | 8.2 | 6.5 | 30 |
| 32 | 8.7 | 12.3 | 12.4 | 10.6 | 9.0 | 7.6 | 6.5 | 32 |
| 34 | 8.2 | 11.6 | 11.9 | 9.8 | 8.2 | 6.8 | 5.9 | 34 |
| 36 | 7.7 | 11.1 | 10.8 | 8.9 | 7.5 | 6.3 | 5.5 | 36 |
| 38 | 7.2 | 10.6 | 10.1 | 8.3 | 6.9 | 5.8 | 5.1 | 38 |
| 40 | | 10.1 | 9.4 | 7.7 | 6.4 | 5.4 | 4.6 | 40 |
| 42 | | 9.6 | 8.8 | 7.0 | 5.9 | 4.9 | 4.2 | 42 |
| 44 | | 9.0 | 8.2 | 6.6 | 5.5 | 4.5 | 3.8 | 44 |
| 46 | | 8.8 | 7.7 | 6.2 | 5.0 | 4.0 | 3.5 | 46 |
| 48 | | 8.4 | 7.2 | 5.6 | 4.6 | 3.8 | 3.2 | 48 |
| 50 | | 8.0 | 6.7 | 5.2 | 4.2 | 3.4 | 3.0 | 50 |
| 52 | | 7.7 | 6.2 | 4.8 | 3.9 | 3.2 | 2.6 | 52 |
| 54 | | 7.4 | 5.7 | 4.5 | 3.6 | 2.8 | 2.4 | 54 |
| 56 | | 7.1 | 5.5 | 4.2 | 3.3 | 2.6 | 2.2 | 56 |
| 58 | | 6.8 | 5.1 | 3.9 | 3.0 | 2.4 | 2.0 | 58 |
| 60 | | 6.5 | 4.9 | 3.5 | 2.8 | 2.2 | | 60 |
| 62 | | 6.0 | 4.4 | 3.3 | 2.6 | 2.0 | | 62 |
| 64 | | 5.7 | 4.2 | 3.1 | 2.3 | | | 64 |
| 66 | | 5.5 | 4.0 | 2.9 | 2.1 | | | 66 |
| 68 | | 5.0 | 3.7 | 2.7 | | | | 68 |
| 70 | | 4.8 | 3.1 | 2.4 | | | | 70 |
| 72 | | 4.6 | 2.8 | 2.1 | | | | 72 |
| 74 | | | 2.4 | | | | | 74 |
| 76 | | | 2.1 | | | | | 76 |
| 组合 Code | 000000 | 211111 | 221111 | 222111 | 222211 | 222221 | 222222 | 组合 Code |
| 倍率 n | 3 | 2 | 2 | 2 | 1 | 1 | 1 | 倍率 n |

起重性能表

T 16.1~79.5m

Rated lifting load table




| m | 16.1+3 m | 53.1+3 m | 58.4+3 m | 63.6+3 m | 68.9+3 m | 74.2+3 m | 79.5+3 m | m |
|---------|----------|----------|----------|----------|----------|----------|----------|---------|
| | 0° | | | | | | | |
| | 18 m | | | | | | | |
| 6 | 39.4 | | | | | | | 6 |
| 7 | 35.5 | | | | | | | 7 |
| 8 | 32.3 | | | | | | | 8 |
| 9 | 29.9 | | | | | | | 9 |
| 10 | 27.5 | | | | | | | 10 |
| 12 | 24.0 | | | | | | | 12 |
| 14 | 21.4 | 25.0 | | | | | | 14 |
| 16 | 19.4 | 23.6 | 22.5 | | | | | 16 |
| 18 | 17.4 | 22.2 | 21.3 | 18.7 | 14.8 | 11.3 | | 18 |
| 20 | 15.8 | 20.7 | 20.1 | 18.7 | 14.8 | 11.3 | 8.1 | 20 |
| 22 | 14.6 | 19.4 | 19.1 | 17.5 | 14.8 | 11.3 | 8.1 | 22 |
| 24 | 13.3 | 18.2 | 18.1 | 15.9 | 13.7 | 11.3 | 8.1 | 24 |
| 26 | 12.4 | 17.0 | 17.3 | 14.4 | 12.5 | 10.8 | 8.1 | 26 |
| 28 | 11.6 | 16.3 | 16.0 | 13.2 | 11.2 | 9.8 | 8.1 | 28 |
| 30 | 10.9 | 15.3 | 14.7 | 12.1 | 10.5 | 8.9 | 7.6 | 30 |
| 32 | 10.5 | 14.5 | 13.4 | 11.3 | 9.4 | 8.2 | 7.1 | 32 |
| 34 | 10.1 | 13.9 | 12.6 | 10.3 | 8.8 | 7.6 | 6.5 | 34 |
| 36 | | 13.1 | 11.7 | 9.5 | 8.0 | 7.0 | 6.1 | 36 |
| 38 | | 12.6 | 10.9 | 8.8 | 7.4 | 6.4 | 5.5 | 38 |
| 40 | | 12.0 | 10.1 | 8.2 | 6.8 | 5.9 | 5.1 | 40 |
| 42 | | 11.4 | 9.4 | 7.7 | 6.4 | 5.5 | 4.7 | 42 |
| 44 | | 11.0 | 9.0 | 7.1 | 6.0 | 5.1 | 4.3 | 44 |
| 46 | | 10.4 | 8.2 | 6.6 | 5.4 | 4.7 | 4.0 | 46 |
| 48 | | 9.8 | 7.8 | 6.2 | 5.0 | 4.3 | 3.7 | 48 |
| 50 | | 9.3 | 7.3 | 5.8 | 4.8 | 4.0 | 3.4 | 50 |
| 52 | | 8.8 | 6.9 | 5.4 | 4.3 | 3.6 | 3.1 | 52 |
| 54 | | 8.4 | 6.5 | 4.9 | 4.0 | 3.5 | 2.9 | 54 |
| 56 | | 7.9 | 6.1 | 4.7 | 3.7 | 3.2 | 2.7 | 56 |
| 58 | | 7.5 | 5.6 | 4.3 | 3.5 | 2.9 | 2.5 | 58 |
| 60 | | 7.0 | 5.3 | 4.1 | 3.1 | 2.7 | 2.3 | 60 |
| 62 | | 6.6 | 4.9 | 3.6 | 2.9 | 2.5 | 2.1 | 62 |
| 64 | | 6.3 | 4.6 | 3.4 | 2.7 | 2.3 | | 64 |
| 66 | | 5.9 | 4.4 | 3.2 | 2.5 | 2.1 | | 66 |
| 68 | | | 3.8 | 3.0 | 2.2 | | | 68 |
| 70 | | | 3.3 | 2.8 | 2.0 | | | 70 |
| 72 | | | 2.8 | 2.2 | | | | 72 |
| 组合 Code | 000000 | 211111 | 221111 | 222111 | 222211 | 222221 | 222222 | 组合 Code |
| 倍率 n | 3 | 2 | 2 | 2 | 2 | 1 | 1 | 倍率 n |

起重性能表

T 16.1~79.5m

Rated lifting load table



| m | 16.1+3 m | 53.1+3 m | 58.4+3 m | 63.6+3 m | 68.9+3 m | 74.2+3 m | 79.5+3 m | m |
|---------|----------|----------|----------|----------|----------|----------|----------|---------|
| | 0° | | | | | | | |
| | 12 m | | | | | | | |
| 5 | 58.9 | | | | | | | 5 |
| 6 | 53.5 | | | | | | | 6 |
| 7 | 49.6 | | | | | | | 7 |
| 8 | 45.6 | | | | | | | 8 |
| 9 | 41.7 | | | | | | | 9 |
| 10 | 38.6 | | | | | | | 10 |
| 12 | 33.8 | | | | | | | 12 |
| 14 | 30.0 | 32.1 | | | | | | 14 |
| 16 | 26.7 | 28.7 | 27.7 | 22.8 | 17.1 | | | 16 |
| 18 | 24.0 | 26.8 | 26.2 | 22.8 | 17.1 | 13.4 | 9.7 | 18 |
| 20 | 21.9 | 25.1 | 24.3 | 20.6 | 17.1 | 13.4 | 9.7 | 20 |
| 22 | 20.2 | 23.6 | 22.0 | 18.7 | 16.0 | 13.4 | 9.7 | 22 |
| 24 | 18.9 | 22.2 | 20.1 | 17.1 | 14.5 | 12.7 | 9.7 | 24 |
| 26 | 17.5 | 21.0 | 18.4 | 15.5 | 13.2 | 11.5 | 9.7 | 26 |
| 28 | 16.3 | 19.8 | 16.9 | 14.3 | 12.1 | 10.5 | 9.3 | 28 |
| 30 | | 18.7 | 15.7 | 13.0 | 11.1 | 9.7 | 8.5 | 30 |
| 32 | | 17.5 | 14.5 | 12.2 | 10.2 | 8.9 | 7.8 | 32 |
| 34 | | 16.3 | 13.4 | 11.2 | 9.4 | 8.1 | 7.2 | 34 |
| 36 | | 15.3 | 12.6 | 10.4 | 8.7 | 7.5 | 6.7 | 36 |
| 38 | | 14.1 | 11.8 | 9.5 | 7.9 | 6.9 | 6.2 | 38 |
| 40 | | 13.2 | 10.9 | 8.9 | 7.4 | 6.5 | 5.7 | 40 |
| 42 | | 12.4 | 10.2 | 8.3 | 6.8 | 5.9 | 5.3 | 42 |
| 44 | | 12.0 | 9.6 | 7.7 | 6.3 | 5.5 | 4.9 | 44 |
| 46 | | 11.1 | 8.9 | 7.3 | 5.9 | 5.1 | 4.6 | 46 |
| 48 | | 10.7 | 8.4 | 6.7 | 5.5 | 4.9 | 4.2 | 48 |
| 50 | | 9.9 | 8.0 | 6.2 | 5.1 | 4.5 | 4.0 | 50 |
| 52 | | 9.4 | 7.4 | 5.8 | 4.7 | 4.1 | 3.6 | 52 |
| 54 | | 9.0 | 6.9 | 5.5 | 4.4 | 3.9 | 3.4 | 54 |
| 56 | | 8.5 | 6.5 | 5.2 | 4.2 | 3.6 | 3.2 | 56 |
| 58 | | 8.1 | 5.8 | 4.8 | 3.8 | 3.2 | 3.0 | 58 |
| 60 | | 7.6 | 5.4 | 4.3 | 3.6 | 3.0 | 2.8 | 60 |
| 62 | | 7.1 | 4.8 | 3.8 | 3.2 | 2.8 | 2.6 | 62 |
| 64 | | | 4.4 | 3.4 | 2.9 | 2.5 | 2.4 | 64 |
| 66 | | | 4.0 | 3.1 | 2.5 | 2.3 | 2.2 | 66 |
| 68 | | | | 2.7 | 2.2 | 2.0 | 2.0 | 68 |
| 70 | | | | 2.4 | | | | 70 |
| 组合 Code | 000000 | 211111 | 221111 | 222111 | 222211 | 222221 | 222222 | 组合 Code |
| 倍率 n | 5 | 3 | 3 | 2 | 2 | 1 | 1 | 倍率 n |

起重性能表


T 16.1~79.5m

Rated lifting load table

| m | 16.1-79.5 m | | 3 m | | 6m | | 9.4×9.6m | | 360° | | 153 t | | m | | |
|---------|-------------|--------|----------|--------|----------|--------|----------|--|----------|--|----------|--|---------|----------|--|
| | 16.1+3 m | | 53.1+3 m | | 58.4+3 m | | 63.6+3 m | | 68.9+3 m | | 74.2+3 m | | | 79.5+3 m | |
| | 0° | | | | | | | | | | | | | | |
| 6 m | | | | | | | | | | | | | | | |
| 3 | 74.0 | | | | | | | | | | | | 3 | | |
| 3.5 | 72.5 | | | | | | | | | | | | 3.5 | | |
| 4 | 70.9 | | | | | | | | | | | | 4 | | |
| 4.5 | 69.6 | | | | | | | | | | | | 4.5 | | |
| 5 | 68.6 | | | | | | | | | | | | 5 | | |
| 6 | 64.5 | | | | | | | | | | | | 6 | | |
| 7 | 59.2 | | | | | | | | | | | | 7 | | |
| 8 | 53.5 | | | | | | | | | | | | 8 | | |
| 9 | 48.9 | | | | | | | | | | | | 9 | | |
| 10 | 44.8 | | | | | | | | | | | | 10 | | |
| 12 | 38.7 | 44.4 | | | | | | | | | | | 12 | | |
| 14 | 34.1 | 40.9 | 36.7 | | | | | | | | | | 14 | | |
| 16 | 30.5 | 38.0 | 32.4 | 26.9 | | | | | | | | | 16 | | |
| 18 | 27.2 | 34.4 | 29.0 | 24.7 | 21.5 | | | | | | | | 18 | | |
| 20 | 24.6 | 31.1 | 26.0 | 22.4 | 19.2 | 16.2 | 12.7 | | | | | | 20 | | |
| 22 | 22.9 | 28.3 | 23.5 | 20.1 | 17.1 | 15.2 | 12.7 | | | | | | 22 | | |
| 24 | | 25.9 | 21.7 | 18.2 | 15.5 | 13.8 | 12.2 | | | | | | 24 | | |
| 26 | | 23.8 | 19.8 | 16.8 | 14.4 | 12.7 | 11.2 | | | | | | 26 | | |
| 28 | | 21.8 | 18.0 | 15.4 | 13.2 | 11.7 | 10.0 | | | | | | 28 | | |
| 30 | | 20.2 | 16.7 | 14.1 | 11.9 | 10.7 | 9.2 | | | | | | 30 | | |
| 32 | | 19.0 | 15.5 | 13.1 | 11.1 | 9.7 | 8.7 | | | | | | 32 | | |
| 34 | | 17.8 | 14.6 | 12.1 | 10.3 | 9.0 | 7.9 | | | | | | 34 | | |
| 36 | | 16.5 | 13.4 | 11.3 | 9.5 | 8.4 | 7.5 | | | | | | 36 | | |
| 38 | | 15.4 | 12.5 | 10.4 | 8.7 | 7.8 | 6.9 | | | | | | 38 | | |
| 40 | | 14.5 | 11.7 | 9.6 | 8.3 | 7.3 | 6.5 | | | | | | 40 | | |
| 42 | | 13.7 | 10.9 | 9.0 | 7.5 | 6.8 | 6.1 | | | | | | 42 | | |
| 44 | | 12.8 | 10.4 | 8.5 | 7.1 | 6.3 | 5.7 | | | | | | 44 | | |
| 46 | | 12.2 | 9.6 | 8.0 | 6.7 | 5.8 | 5.3 | | | | | | 46 | | |
| 48 | | 11.5 | 9.2 | 7.4 | 6.3 | 5.4 | 4.9 | | | | | | 48 | | |
| 50 | | 10.9 | 8.7 | 6.9 | 5.8 | 5.1 | 4.7 | | | | | | 50 | | |
| 52 | | 10.5 | 8.1 | 6.5 | 5.4 | 4.8 | 4.2 | | | | | | 52 | | |
| 54 | | 9.6 | 7.7 | 6.1 | 5.0 | 4.5 | 4.0 | | | | | | 54 | | |
| 56 | | 9.2 | 6.8 | 5.6 | 4.8 | 4.2 | 3.8 | | | | | | 56 | | |
| 58 | | | 6.0 | 5.1 | 4.4 | 3.9 | 3.6 | | | | | | 58 | | |
| 60 | | | 5.4 | 4.4 | 3.9 | 3.7 | 3.4 | | | | | | 60 | | |
| 62 | | | | 3.9 | 3.5 | 3.2 | 3.2 | | | | | | 62 | | |
| 64 | | | | 3.4 | 2.9 | 2.8 | 2.8 | | | | | | 64 | | |
| 66 | | | | 3.0 | 2.6 | 2.5 | 2.5 | | | | | | 66 | | |
| 68 | | | | | 2.3 | 2.1 | 2.0 | | | | | | 68 | | |
| 组合 Code | 000000 | 211111 | 221111 | 222111 | 222211 | 222221 | 222222 | | | | | | 组合 Code | | |
| 倍率 n | 6 | 4 | 3 | 3 | 2 | 2 | 1 | | | | | | 倍率 n | | |

起升高度曲线图
Lifting height chart


主臂+副臂
Boom + Jib

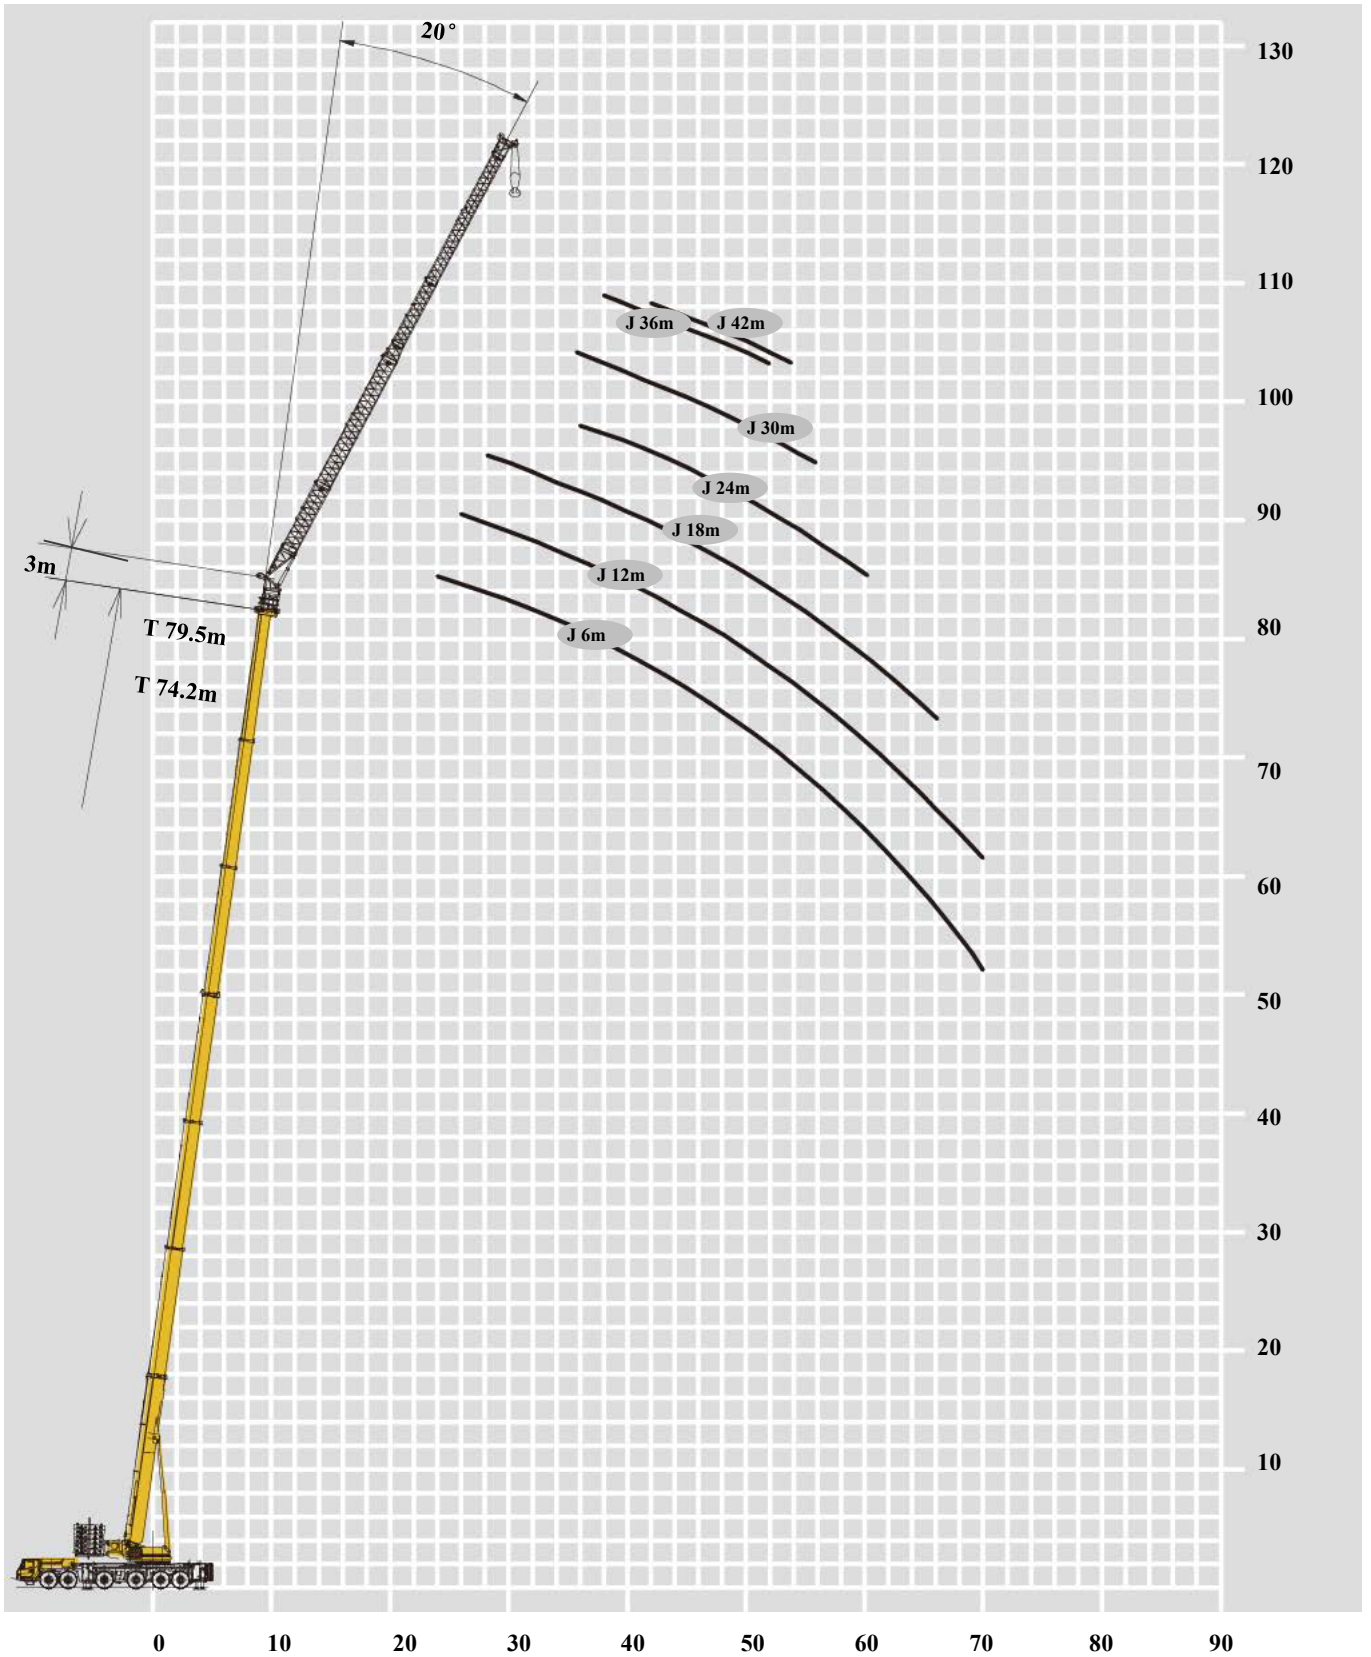

起重性能表

T 16.1~74.2m

Rated lifting load table




| m | 16.1+3 m | 53.1+3 m | 58.4+3 m | 63.6+3 m | 68.9+3 m | 74.2+3 m | m |
|---------|----------|----------|----------|----------|----------|----------|---------|
| | 20° | | | | | | |
| | 42 m | | | | | | |
| 24 | 5.4 | | | | | | 24 |
| 26 | 5.0 | | | | | | 26 |
| 28 | 4.7 | | | | | | 28 |
| 30 | 4.3 | | | | | | 30 |
| 32 | 4.1 | 4.7 | | | | | 32 |
| 34 | 3.8 | 4.7 | 4.6 | | | | 34 |
| 36 | 3.6 | 4.5 | 4.6 | | | | 36 |
| 38 | 3.3 | 4.3 | 4.4 | 4.5 | | | 38 |
| 40 | 3.1 | 4.2 | 4.3 | 4.4 | 4.3 | | 40 |
| 42 | 2.9 | 4.0 | 4.1 | 4.2 | 4.3 | 3.1 | 42 |
| 44 | 2.8 | 3.9 | 4.0 | 4.1 | 4.1 | 3.1 | 44 |
| 46 | 2.6 | 3.7 | 3.8 | 3.9 | 3.9 | 3.1 | 46 |
| 48 | 2.5 | 3.6 | 3.7 | 3.8 | 3.8 | 2.9 | 48 |
| 50 | 2.4 | 3.5 | 3.6 | 3.7 | 3.4 | 2.6 | 50 |
| 52 | 2.3 | 3.4 | 3.5 | 3.6 | 3.1 | 2.3 | 52 |
| 54 | 2.2 | 3.3 | 3.4 | 3.5 | 2.8 | 2.1 | 54 |
| 56 | 2.1 | 3.2 | 3.3 | 3.4 | 2.6 | | 56 |
| 58 | | 3.1 | 3.2 | 3.2 | 2.4 | | 58 |
| 60 | | 3.0 | 3.1 | 3.0 | 2.2 | | 60 |
| 62 | | 2.9 | 3.0 | 2.7 | | | 62 |
| 64 | | 2.8 | 2.9 | 2.4 | | | 64 |
| 66 | | 2.7 | 2.8 | 2.2 | | | 66 |
| 68 | | 2.7 | 2.8 | 2.0 | | | 68 |
| 70 | | 2.6 | 2.6 | | | | 70 |
| 72 | | 2.6 | 2.4 | | | | 72 |
| 74 | | 2.5 | 2.3 | | | | 74 |
| 76 | | 2.4 | 2.0 | | | | 76 |
| 78 | | 2.4 | | | | | 78 |
| 80 | | 2.3 | | | | | 80 |
| 82 | | 2.3 | | | | | 82 |
| 84 | | 2.2 | | | | | 84 |
| 86 | | 2.0 | | | | | 86 |
| 组合 Code | 000000 | 211111 | 221111 | 222111 | 222211 | 222221 | 组合 Code |
| 倍率 n | 1 | 1 | 1 | 1 | 1 | 1 | 倍率 n |

起重性能表

Rated lifting load table

T 16.1~79.5m




| | 16.1+3 m | 53.1+3 m | 58.4+3 m | 63.6+3 m | 68.9+3 m | 74.2+3 m | 79.5+3 m | |
|---------|----------|----------|----------|----------|----------|----------|----------|---------|
| | 20° | | | | | | | |
| | 36 m | | | | | | | |
| 20 | 7.6 | | | | | | | 20 |
| 22 | 7.0 | | | | | | | 22 |
| 24 | 6.4 | | | | | | | 24 |
| 26 | 6.0 | | | | | | | 26 |
| 28 | 5.6 | 6.5 | | | | | | 28 |
| 30 | 5.2 | 6.5 | 6.3 | | | | | 30 |
| 32 | 5.0 | 6.2 | 6.3 | | | | | 32 |
| 34 | 4.7 | 6.0 | 6.1 | 6.0 | 5.8 | | | 34 |
| 36 | 4.4 | 5.8 | 5.9 | 6.0 | 5.8 | 4.2 | | 36 |
| 38 | 4.2 | 5.5 | 5.7 | 5.8 | 5.8 | 4.2 | 2.8 | 38 |
| 40 | 4.0 | 5.3 | 5.5 | 5.6 | 5.5 | 4.2 | 2.8 | 40 |
| 42 | 3.7 | 5.1 | 5.3 | 5.5 | 5.1 | 4.2 | 2.8 | 42 |
| 44 | 3.5 | 5.0 | 5.2 | 5.3 | 4.7 | 3.8 | 2.8 | 44 |
| 46 | 3.4 | 4.8 | 5.0 | 5.1 | 4.4 | 3.6 | 2.8 | 46 |
| 48 | 3.3 | 4.7 | 4.9 | 5.0 | 4.0 | 3.1 | 2.5 | 48 |
| 50 | 3.1 | 4.5 | 4.7 | 4.6 | 3.7 | 3.0 | 2.3 | 50 |
| 52 | | 4.4 | 4.6 | 4.4 | 3.4 | 2.8 | 2.0 | 52 |
| 54 | | 4.3 | 4.5 | 4.0 | 3.1 | 2.4 | | 54 |
| 56 | | 4.2 | 4.4 | 3.8 | 2.9 | 2.2 | | 56 |
| 58 | | 4.1 | 4.3 | 3.5 | 2.6 | 2.0 | | 58 |
| 60 | | 4.0 | 4.2 | 3.3 | 2.4 | | | 60 |
| 62 | | 3.9 | 4.0 | 3.0 | 2.2 | | | 62 |
| 64 | | 3.8 | 3.8 | 2.7 | | | | 64 |
| 66 | | 3.7 | 3.6 | 2.5 | | | | 66 |
| 68 | | 3.6 | 3.3 | 2.3 | | | | 68 |
| 70 | | 3.5 | 3.1 | 2.1 | | | | 70 |
| 72 | | 3.4 | 2.9 | | | | | 72 |
| 74 | | 3.3 | 2.6 | | | | | 74 |
| 76 | | 3.2 | 2.4 | | | | | 76 |
| 78 | | 3.1 | 2.2 | | | | | 78 |
| 80 | | 3.0 | | | | | | 80 |
| 82 | | 2.7 | | | | | | 82 |
| 84 | | 2.4 | | | | | | 84 |
| 86 | | 2.0 | | | | | | 86 |
| 组合 Code | 000000 | 211111 | 221111 | 222111 | 222211 | 222221 | 222222 | 组合 Code |
| 倍率 n | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 倍率 n |

起重性能表

T 16.1~79.5m

Rated lifting load table




| | 16.1+3 m | 53.1+3 m | 58.4+3 m | 63.6+3 m | 68.9+3 m | 74.2+3 m | 79.5+3 m | |
|---------|----------|----------|----------|----------|----------|----------|----------|---------|
| | 20° | | | | | | | |
| | 30 m | | | | | | | |
| 18 | 9.1 | | | | | | | 18 |
| 20 | 8.3 | | | | | | | 20 |
| 22 | 7.7 | | | | | | | 22 |
| 24 | 7.2 | | | | | | | 24 |
| 26 | 6.8 | 7.9 | | | | | | 26 |
| 28 | 6.3 | 7.9 | 7.8 | | | | | 28 |
| 30 | 5.9 | 7.6 | 7.8 | 7.7 | | | | 30 |
| 32 | 5.6 | 7.4 | 7.6 | 7.7 | 6.9 | | | 32 |
| 34 | 5.4 | 7.2 | 7.3 | 7.5 | 6.9 | 5.4 | | 34 |
| 36 | 5.0 | 6.9 | 7.1 | 7.4 | 6.9 | 5.4 | 4.2 | 36 |
| 38 | 4.8 | 6.7 | 6.9 | 7.1 | 6.5 | 5.4 | 4.2 | 38 |
| 40 | 4.6 | 6.5 | 6.7 | 6.9 | 5.9 | 5.0 | 4.2 | 40 |
| 42 | 4.4 | 6.3 | 6.5 | 6.7 | 5.5 | 4.6 | 3.9 | 42 |
| 44 | 4.2 | 6.1 | 6.3 | 6.4 | 5.1 | 4.2 | 3.6 | 44 |
| 46 | | 5.9 | 6.1 | 6.0 | 4.7 | 3.9 | 3.3 | 46 |
| 48 | | 5.8 | 6.0 | 5.5 | 4.4 | 3.6 | 3.0 | 48 |
| 50 | | 5.6 | 5.9 | 5.1 | 4.1 | 3.4 | 2.8 | 50 |
| 52 | | 5.5 | 5.7 | 4.8 | 3.8 | 3.1 | 2.6 | 52 |
| 54 | | 5.4 | 5.5 | 4.4 | 3.5 | 2.8 | 2.4 | 54 |
| 56 | | 5.2 | 5.3 | 4.2 | 3.2 | 2.6 | 2.2 | 56 |
| 58 | | 5.2 | 5.0 | 3.9 | 3.0 | 2.4 | 2.0 | 58 |
| 60 | | 5.0 | 4.7 | 3.7 | 2.7 | 2.2 | | 60 |
| 62 | | 4.9 | 4.5 | 3.4 | 2.5 | 2.0 | | 62 |
| 64 | | 4.7 | 4.1 | 3.1 | 2.3 | | | 64 |
| 66 | | 4.5 | 3.8 | 2.9 | 2.1 | | | 66 |
| 68 | | 4.4 | 3.6 | 2.7 | | | | 68 |
| 70 | | 4.0 | 3.4 | 2.5 | | | | 70 |
| 72 | | 3.6 | 3.0 | 2.3 | | | | 72 |
| 74 | | 3.3 | 2.6 | 2.0 | | | | 74 |
| 76 | | 2.9 | 2.3 | | | | | 76 |
| 78 | | 2.5 | 2.1 | | | | | 78 |
| 80 | | 2.1 | | | | | | 80 |
| 组合 Code | 000000 | 211111 | 221111 | 222111 | 222211 | 222221 | 222222 | 组合 Code |
| 倍率 n | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 倍率 n |

起重性能表

Rated lifting load table

T 16.1~79.5m




| | 16.1+3 m | 53.1+3 m | 58.4+3 m | 63.6+3 m | 68.9+3 m | 74.2+3 m | 79.5+3 m | |
|---------|----------|----------|----------|----------|----------|----------|----------|---------|
| | 20° | | | | | | | |
| | 24 m | | | | | | | |
| 14 | 12.6 | | | | | | | 14 |
| 16 | 11.6 | | | | | | | 16 |
| 18 | 10.9 | | | | | | | 18 |
| 20 | 10.4 | | | | | | | 20 |
| 22 | 9.7 | | | | | | | 22 |
| 24 | 9.1 | 11.1 | | | | | | 24 |
| 26 | 8.6 | 10.9 | 10.9 | 10.6 | | | | 26 |
| 28 | 8.1 | 10.7 | 10.8 | 10.6 | 9.4 | | | 28 |
| 30 | 7.6 | 10.4 | 10.4 | 10.2 | 9.4 | 6.7 | | 30 |
| 32 | 7.2 | 10.0 | 9.9 | 9.9 | 8.7 | 6.7 | 5.4 | 32 |
| 34 | 7.0 | 9.6 | 9.5 | 9.5 | 8.1 | 6.7 | 5.4 | 34 |
| 36 | 6.7 | 9.2 | 9.2 | 9.0 | 7.5 | 6.3 | 5.4 | 36 |
| 38 | 6.4 | 8.8 | 8.8 | 8.3 | 7.0 | 5.8 | 5.0 | 38 |
| 40 | | 8.4 | 8.6 | 7.7 | 6.4 | 5.4 | 4.6 | 40 |
| 42 | | 8.2 | 8.2 | 7.3 | 6.0 | 5.0 | 4.2 | 42 |
| 44 | | 7.8 | 8.0 | 6.7 | 5.5 | 4.6 | 3.9 | 44 |
| 46 | | 7.6 | 7.7 | 6.3 | 5.1 | 4.3 | 3.7 | 46 |
| 48 | | 7.4 | 7.3 | 5.8 | 4.9 | 4.0 | 3.5 | 48 |
| 50 | | 7.2 | 6.8 | 5.5 | 4.5 | 3.7 | 3.2 | 50 |
| 52 | | 6.9 | 6.4 | 5.2 | 4.3 | 3.5 | 2.9 | 52 |
| 54 | | 6.7 | 6.2 | 4.9 | 3.9 | 3.2 | 2.7 | 54 |
| 56 | | 6.5 | 5.7 | 4.6 | 3.6 | 3.0 | 2.5 | 56 |
| 58 | | 6.3 | 5.3 | 4.3 | 3.4 | 2.8 | 2.3 | 58 |
| 60 | | 6.1 | 5.1 | 4.0 | 3.1 | 2.6 | 2.1 | 60 |
| 62 | | 5.9 | 4.8 | 3.7 | 2.9 | 2.4 | | 62 |
| 64 | | 5.8 | 4.5 | 3.4 | 2.7 | 2.1 | | 64 |
| 66 | | 5.5 | 4.2 | 3.2 | 2.5 | | | 66 |
| 68 | | 5.2 | 3.8 | 3.0 | 2.2 | | | 68 |
| 70 | | 4.8 | 3.4 | 2.6 | 2.0 | | | 70 |
| 72 | | 4.5 | 3.1 | 2.2 | | | | 72 |
| 74 | | 4.1 | 2.7 | 2.0 | | | | 74 |
| 76 | | | 2.3 | | | | | 76 |
| 组合 Code | 000000 | 211111 | 221111 | 222111 | 222211 | 222221 | 222222 | 组合 Code |
| 倍率 n | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 倍率 n |

起重性能表

T 16.1~79.5m

Rated lifting load table




| | 16.1+3 m | 53.1+3 m | 58.4+3 m | 63.6+3 m | 68.9+3 m | 74.2+3 m | 79.5+3 m | |
|---------|----------|----------|----------|----------|----------|----------|----------|---------|
| | 20° | | | | | | | |
| | 18 m | | | | | | | |
| 12 | 16.2 | | | | | | | 12 |
| 14 | 15.0 | | | | | | | 14 |
| 16 | 13.8 | | | | | | | 16 |
| 18 | 12.8 | | | | | | | 18 |
| 20 | 12.0 | 15.5 | | | | | | 20 |
| 22 | 11.2 | 14.8 | 15.1 | | | | | 22 |
| 24 | 10.9 | 14.4 | 14.4 | 13.8 | 11.9 | | | 24 |
| 26 | 10.6 | 13.8 | 13.7 | 13.5 | 11.9 | 8.8 | | 26 |
| 28 | 10.2 | 13.3 | 13.2 | 12.8 | 11.1 | 8.8 | 6.8 | 28 |
| 30 | 9.7 | 12.7 | 12.7 | 11.9 | 10.1 | 8.8 | 6.8 | 30 |
| 32 | 9.3 | 12.1 | 12.2 | 11.1 | 9.3 | 8.1 | 6.8 | 32 |
| 34 | | 11.7 | 11.7 | 10.3 | 8.7 | 7.5 | 6.4 | 34 |
| 36 | | 11.3 | 11.4 | 9.6 | 8.1 | 7.0 | 5.9 | 36 |
| 38 | | 10.7 | 10.9 | 9.0 | 7.5 | 6.5 | 5.5 | 38 |
| 40 | | 10.3 | 10.1 | 8.3 | 7.0 | 6.1 | 5.1 | 40 |
| 42 | | 10.0 | 9.7 | 7.9 | 6.5 | 5.7 | 4.8 | 42 |
| 44 | | 9.7 | 9.0 | 7.3 | 6.0 | 5.3 | 4.6 | 44 |
| 46 | | 9.4 | 8.4 | 6.8 | 5.6 | 4.9 | 4.2 | 46 |
| 48 | | 9.0 | 8.0 | 6.4 | 5.3 | 4.6 | 4.0 | 48 |
| 50 | | 8.8 | 7.6 | 6.0 | 5.0 | 4.3 | 3.7 | 50 |
| 52 | | 8.5 | 7.2 | 5.6 | 4.7 | 4.0 | 3.5 | 52 |
| 54 | | 8.3 | 6.7 | 5.3 | 4.4 | 3.7 | 3.3 | 54 |
| 56 | | 8.0 | 6.3 | 4.9 | 4.1 | 3.5 | 2.9 | 56 |
| 58 | | 7.7 | 6.0 | 4.7 | 3.8 | 3.3 | 2.7 | 58 |
| 60 | | 7.3 | 5.6 | 4.5 | 3.5 | 3.1 | 2.5 | 60 |
| 62 | | 6.7 | 5.4 | 4.1 | 3.2 | 2.9 | 2.3 | 62 |
| 64 | | 6.1 | 4.7 | 3.9 | 3.0 | 2.6 | 2.2 | 64 |
| 66 | | 5.6 | 4.2 | 3.4 | 2.8 | 2.4 | 2.0 | 66 |
| 68 | | 5.2 | 3.8 | 3.0 | 2.5 | 2.2 | | 68 |
| 70 | | | 3.4 | 2.7 | 2.1 | 2.1 | | 70 |
| 72 | | | 3.0 | 2.3 | | | | 72 |
| 74 | | | | | | | | 74 |
| 组合 Code | 000000 | 211111 | 221111 | 222111 | 222211 | 222221 | 222222 | 组合 Code |
| 倍率 n | 2 | 2 | 2 | 2 | 1 | 1 | 1 | 倍率 n |

起重性能表

T 16.1~79.5m

Rated lifting load table




| | 16.1+3 m | 53.1+3 m | 58.4+3 m | 63.6+3 m | 68.9+3 m | 74.2+3 m | 79.5+3 m | |
|---------|----------|----------|----------|----------|----------|----------|----------|---------|
| | 20° | | | | | | | |
| | 12 m | | | | | | | |
| 8 | 29.4 | | | | | | | 8 |
| 9 | 27.8 | | | | | | | 9 |
| 10 | 26.4 | | | | | | | 10 |
| 12 | 23.9 | | | | | | | 12 |
| 14 | 22.1 | | | | | | | 14 |
| 16 | 21.1 | 22.8 | | | | | | 16 |
| 18 | 19.7 | 21.6 | 21.1 | | | | | 18 |
| 20 | 18.7 | 20.5 | 20.2 | | | | | 20 |
| 22 | 17.6 | 19.3 | 19.3 | 18.0 | 14.0 | | | 22 |
| 24 | 17.0 | 18.4 | 18.5 | 16.4 | 14.0 | 11.1 | | 24 |
| 26 | 16.2 | 17.7 | 17.8 | 15.2 | 12.8 | 11.1 | 9.0 | 26 |
| 28 | | 16.9 | 16.3 | 13.9 | 11.8 | 10.2 | 9.0 | 28 |
| 30 | | 16.1 | 15.3 | 12.9 | 10.9 | 9.4 | 8.3 | 30 |
| 32 | | 15.4 | 14.3 | 12.1 | 10.1 | 8.8 | 7.8 | 32 |
| 34 | | 14.9 | 13.2 | 11.3 | 9.3 | 8.2 | 7.1 | 34 |
| 36 | | 14.4 | 12.4 | 10.5 | 8.6 | 7.6 | 6.7 | 36 |
| 38 | | 13.8 | 11.5 | 9.7 | 8.2 | 7.0 | 6.3 | 38 |
| 40 | | 13.3 | 11.0 | 9.1 | 7.6 | 6.6 | 5.9 | 40 |
| 42 | | 12.6 | 10.3 | 8.7 | 7.2 | 6.2 | 5.5 | 42 |
| 44 | | 12.0 | 9.7 | 8.1 | 6.6 | 5.8 | 5.1 | 44 |
| 46 | | 11.5 | 9.1 | 7.6 | 6.1 | 5.4 | 4.8 | 46 |
| 48 | | 10.7 | 8.7 | 7.0 | 5.7 | 5.1 | 4.5 | 48 |
| 50 | | 10.3 | 8.3 | 6.6 | 5.5 | 4.8 | 4.2 | 50 |
| 52 | | 9.9 | 7.6 | 6.2 | 5.1 | 4.4 | 4.0 | 52 |
| 54 | | 9.4 | 7.2 | 5.8 | 4.8 | 4.2 | 3.8 | 54 |
| 56 | | 9.0 | 6.8 | 5.5 | 4.4 | 3.8 | 3.6 | 56 |
| 58 | | 8.2 | 6.5 | 5.2 | 4.2 | 3.6 | 3.4 | 58 |
| 60 | | 7.4 | 5.8 | 4.8 | 4.0 | 3.4 | 3.2 | 60 |
| 62 | | 6.7 | 5.1 | 4.6 | 3.8 | 3.2 | 2.9 | 62 |
| 64 | | | 4.5 | 4.0 | 3.6 | 3.0 | 2.7 | 64 |
| 66 | | | 4.0 | 3.4 | 3.1 | 2.7 | 2.5 | 66 |
| 68 | | | | 2.9 | 2.6 | 2.4 | 2.4 | 68 |
| 70 | | | | 2.4 | 2.1 | 2.0 | 2.0 | 70 |
| 组合 Code | 000000 | 211111 | 221111 | 222111 | 222211 | 222221 | 222222 | 组合 Code |
| 倍率 n | 3 | 2 | 2 | 2 | 2 | 1 | 1 | 倍率 n |

起重性能表

T 16.1~79.5m


Rated lifting load table



| | 16.1+3 m | 53.1+3 m | 58.4+3 m | 63.6+3 m | 68.9+3 m | 74.2+3 m | 79.5+3 m | |
|---------|----------|----------|----------|----------|----------|----------|----------|---------|
| | 20° | | | | | | | |
| | 6 m | | | | | | | |
| 5 | 41.4 | | | | | | | 5 |
| 6 | 39.0 | | | | | | | 6 |
| 7 | 36.6 | | | | | | | 7 |
| 8 | 34.8 | | | | | | | 8 |
| 9 | 33.2 | | | | | | | 9 |
| 10 | 31.6 | | | | | | | 10 |
| 12 | 28.7 | | | | | | | 12 |
| 14 | 26.6 | 32.2 | | | | | | 14 |
| 16 | 24.9 | 30.8 | 30.4 | | | | | 16 |
| 18 | 23.3 | 29.3 | 28.3 | | | | | 18 |
| 20 | 22.4 | 28.6 | 25.7 | 21.7 | 18.7 | | | 20 |
| 22 | | 27.2 | 23.2 | 19.7 | 17.2 | 14.9 | | 22 |
| 24 | | 25.5 | 21.4 | 17.8 | 15.6 | 13.7 | 11.9 | 24 |
| 26 | | 23.8 | 19.8 | 16.4 | 14.4 | 12.6 | 10.9 | 26 |
| 28 | | 21.9 | 18.2 | 15.2 | 13.2 | 11.6 | 10.0 | 28 |
| 30 | | 20.5 | 16.9 | 14.1 | 12.2 | 10.6 | 9.2 | 30 |
| 32 | | 19.0 | 15.6 | 13.2 | 11.4 | 9.9 | 8.7 | 32 |
| 34 | | 17.9 | 14.8 | 12.3 | 10.4 | 9.2 | 8.1 | 34 |
| 36 | | 16.9 | 13.6 | 11.4 | 9.6 | 8.6 | 7.5 | 36 |
| 38 | | 15.8 | 12.7 | 10.5 | 9.2 | 8.1 | 7.1 | 38 |
| 40 | | 14.9 | 11.9 | 9.9 | 8.4 | 7.5 | 6.7 | 40 |
| 42 | | 14.1 | 11.5 | 9.3 | 8.0 | 7.0 | 6.3 | 42 |
| 44 | | 13.2 | 10.7 | 8.7 | 7.5 | 6.6 | 5.9 | 44 |
| 46 | | 12.5 | 10.2 | 8.3 | 6.9 | 6.2 | 5.5 | 46 |
| 48 | | 11.6 | 9.2 | 7.9 | 6.5 | 5.7 | 5.3 | 48 |
| 50 | | 10.9 | 8.5 | 7.5 | 6.1 | 5.5 | 4.9 | 50 |
| 52 | | 10.4 | 7.9 | 6.8 | 5.7 | 5.1 | 4.7 | 52 |
| 54 | | 9.7 | 7.3 | 6.2 | 5.4 | 4.9 | 4.5 | 54 |
| 56 | | 8.7 | 6.7 | 5.5 | 5.1 | 4.6 | 4.1 | 56 |
| 58 | | | 5.9 | 5.0 | 4.8 | 4.2 | 3.9 | 58 |
| 60 | | | 5.1 | 4.6 | 4.5 | 4.0 | 3.7 | 60 |
| 62 | | | | 4.0 | 3.9 | 3.8 | 3.5 | 62 |
| 64 | | | | 3.5 | 3.3 | 3.3 | 3.3 | 64 |
| 66 | | | | 3.0 | 2.8 | 2.8 | 2.8 | 66 |
| 68 | | | | | 2.4 | 2.4 | 2.4 | 68 |
| 70 | | | | | 2.0 | 2.0 | 2.0 | 70 |
| 组合 Code | 000000 | 211111 | 221111 | 222111 | 222211 | 222221 | 222222 | 组合 Code |
| 倍率 n | 4 | 3 | 3 | 2 | 2 | 2 | 1 | 倍率 n |

起升高度曲线图
Lifting height chart


主臂+副臂
Boom + Jib

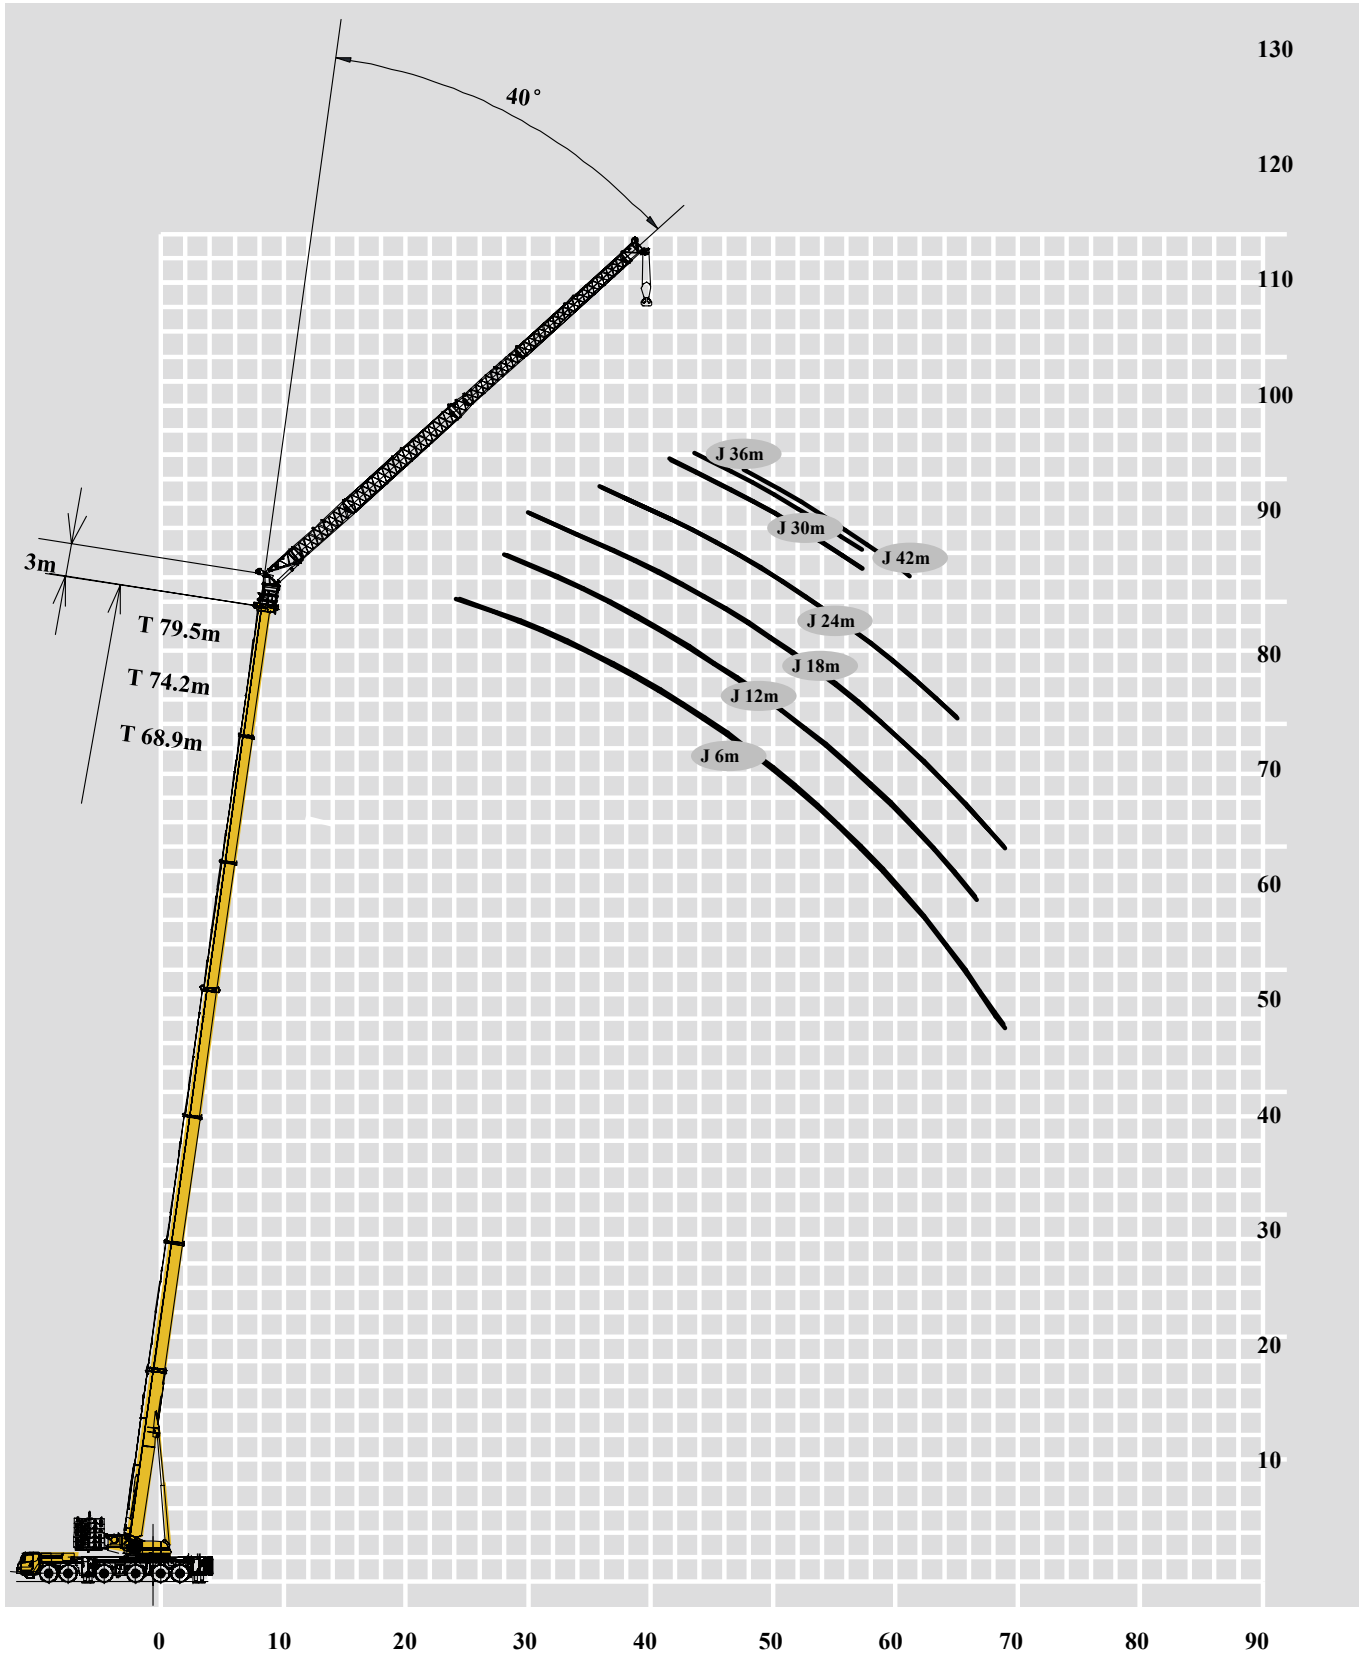

起重性能表

T 16.1~68.9 m

Rated lifting load table




| m | 16.1+3 m | 53.1+3 m | 58.4+3 m | 63.6+3 m | 68.9+3 m | m |
|---------|----------|----------|----------|----------|----------|---------|
| | 40° | | | | | |
| | 42 m | | | | | |
| 34 | 3.0 | | | | | 34 |
| 36 | 2.9 | | | | | 36 |
| 38 | 2.8 | | | | | 38 |
| 40 | 2.7 | | | | | 40 |
| 42 | 2.5 | | | | | 42 |
| 44 | 2.4 | 2.8 | | | | 44 |
| 46 | 2.3 | 2.8 | 2.8 | | | 46 |
| 48 | 2.1 | 2.7 | 2.7 | 2.8 | | 48 |
| 50 | 2.1 | 2.6 | 2.6 | 2.7 | 2.7 | 50 |
| 52 | 2.0 | 2.6 | 2.6 | 2.6 | 2.7 | 52 |
| 54 | 2.0 | 2.5 | 2.5 | 2.6 | 2.7 | 54 |
| 56 | | 2.4 | 2.5 | 2.5 | 2.6 | 56 |
| 58 | | 2.3 | 2.4 | 2.5 | 2.6 | 58 |
| 60 | | 2.3 | 2.4 | 2.5 | 2.4 | 60 |
| 62 | | 2.3 | 2.3 | 2.4 | 2.2 | 62 |
| 64 | | 2.2 | 2.3 | 2.4 | 2.0 | 64 |
| 66 | | 2.2 | 2.3 | 2.4 | | 66 |
| 68 | | 2.2 | 2.3 | 2.4 | | 68 |
| 70 | | 2.2 | 2.2 | 2.2 | | 70 |
| 72 | | 2.1 | 2.2 | 2.1 | | 72 |
| 74 | | 2.1 | 2.2 | | | 74 |
| 76 | | 2.1 | 2.2 | | | 76 |
| 78 | | 2.1 | 2.0 | | | 78 |
| 80 | | 2.0 | | | | 80 |
| 82 | | 2.0 | | | | 82 |
| 84 | | | | | | 84 |
| 86 | | | | | | 86 |
| 组合 Code | 000000 | 211111 | 221111 | 222111 | 222211 | 组合 Code |
| 倍率 n | 1 | 1 | 1 | 1 | 1 | 倍率 n |

起重性能表

T 16.1~74.2 m

Rated lifting load table




| m | 16.1+3 m | 53.1+3 m | 58.4+3 m | 63.6+3 m | 68.9+3 m | 74.2+3 m | m |
|---------|----------|----------|----------|----------|----------|----------|---------|
| | 40° | | | | | | |
| | 36 m | | | | | | |
| 30 | 4.3 | | | | | | 30 |
| 32 | 4.1 | | | | | | 32 |
| 34 | 3.9 | | | | | | 34 |
| 36 | 3.7 | | | | | | 36 |
| 38 | 3.6 | 4.1 | | | | | 38 |
| 40 | 3.4 | 4.0 | 4.1 | | | | 40 |
| 42 | 3.3 | 3.9 | 4.0 | 4.0 | | | 42 |
| 44 | 3.1 | 3.8 | 3.9 | 4.0 | | | 44 |
| 46 | 3.1 | 3.7 | 3.8 | 3.9 | 4.0 | 3.3 | 46 |
| 48 | | 3.6 | 3.7 | 3.8 | 3.9 | 3.3 | 48 |
| 50 | | 3.6 | 3.7 | 3.8 | 3.8 | 3.1 | 50 |
| 52 | | 3.5 | 3.6 | 3.7 | 3.6 | 2.9 | 52 |
| 54 | | 3.5 | 3.6 | 3.7 | 3.4 | 2.7 | 54 |
| 56 | | 3.4 | 3.5 | 3.6 | 3.2 | 2.5 | 56 |
| 58 | | 3.4 | 3.5 | 3.6 | 3.0 | 2.3 | 58 |
| 60 | | 3.3 | 3.4 | 3.6 | 2.8 | 2.2 | 60 |
| 62 | | 3.3 | 3.4 | 3.4 | 2.6 | | 62 |
| 64 | | 3.3 | 3.4 | 3.1 | 2.4 | | 64 |
| 66 | | 3.2 | 3.4 | 2.9 | 2.1 | | 66 |
| 68 | | 3.2 | 3.3 | 2.7 | 2.0 | | 68 |
| 70 | | 3.2 | 3.3 | 2.5 | | | 70 |
| 72 | | 3.2 | 3.2 | 2.3 | | | 72 |
| 74 | | 3.1 | 2.9 | 2.2 | | | 74 |
| 76 | | 3.1 | 2.6 | | | | 76 |
| 78 | | | 2.2 | | | | 78 |
| 80 | | | 2.0 | | | | 80 |
| 组合 Code | 000000 | 211111 | 221111 | 222111 | 222211 | 222221 | 组合 Code |
| 倍率 n | 1 | 1 | 1 | 1 | 1 | 1 | 倍率 n |

起重性能表

T 16.1~79.5 m

Rated lifting load table




| | 16.1+3 m | 53.1+3 m | 58.4+3 m | 63.6+3 m | 68.9+3 m | 74.2+3 m | 79.5+3 m | |
|---------|----------|----------|----------|----------|----------|----------|----------|---------|
| | 40° | | | | | | | |
| | 30 m | | | | | | | |
| 26 | 5.5 | | | | | | | 26 |
| 28 | 5.2 | | | | | | | 28 |
| 30 | 5.0 | | | | | | | 30 |
| 32 | 4.8 | | | | | | | 32 |
| 34 | 4.6 | 5.3 | | | | | | 34 |
| 36 | 4.4 | 5.2 | 5.2 | | | | | 36 |
| 38 | 4.3 | 5.2 | 5.2 | 5.3 | | | | 38 |
| 40 | 4.2 | 5.0 | 5.1 | 5.2 | 5.2 | | | 40 |
| 42 | 4.2 | 5.0 | 5.0 | 5.1 | 5.2 | 4.3 | | 42 |
| 44 | | 4.8 | 4.9 | 5.1 | 5.2 | 4.3 | 3.4 | 44 |
| 46 | | 4.8 | 4.9 | 5.0 | 4.9 | 4.1 | 3.4 | 46 |
| 48 | | 4.7 | 4.8 | 4.9 | 4.7 | 3.9 | 3.2 | 48 |
| 50 | | 4.7 | 4.7 | 4.9 | 4.4 | 3.6 | 3.0 | 50 |
| 52 | | 4.6 | 4.7 | 4.9 | 4.2 | 3.3 | 2.8 | 52 |
| 54 | | 4.5 | 4.7 | 4.8 | 3.9 | 3.1 | 2.6 | 54 |
| 56 | | 4.5 | 4.6 | 4.5 | 3.6 | 2.9 | 2.4 | 56 |
| 58 | | 4.5 | 4.6 | 4.3 | 3.4 | 2.8 | 2.3 | 58 |
| 60 | | 4.4 | 4.6 | 4.1 | 3.2 | 2.6 | 2.1 | 60 |
| 62 | | 4.4 | 4.6 | 3.9 | 3.0 | 2.4 | | 62 |
| 64 | | 4.4 | 4.6 | 3.7 | 2.8 | 2.2 | | 64 |
| 66 | | 4.4 | 4.4 | 3.5 | 2.6 | 2.1 | | 66 |
| 68 | | 4.4 | 4.1 | 3.2 | 2.4 | 2.0 | | 68 |
| 70 | | 4.3 | 3.7 | 2.9 | 2.3 | | | 70 |
| 72 | | | 3.4 | 2.5 | 2.1 | | | 72 |
| 74 | | | 3.0 | 2.3 | | | | 74 |
| 76 | | | | 2.0 | | | | 76 |
| 组合 Code | 000000 | 211111 | 221111 | 222111 | 222211 | 222221 | 222222 | 组合 Code |
| 倍率 n | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 倍率 n |

起重性能表

T 16.1~79.5 m

Rated lifting load table




| | 16.1+3 m | 53.1+3 m | 58.4+3 m | 63.6+3 m | 68.9+3 m | 74.2+3 m | 79.5+3 m | |
|---------|----------|----------|----------|----------|----------|----------|----------|---------|
| | 40° | | | | | | | |
| | 24 m | | | | | | | |
| 20 | 8.4 | | | | | | | 20 |
| 22 | 8.0 | | | | | | | 22 |
| 24 | 7.5 | | | | | | | 24 |
| 26 | 7.2 | | | | | | | 26 |
| 28 | 6.9 | | | | | | | 28 |
| 30 | 6.6 | 7.8 | | | | | | 30 |
| 32 | 6.4 | 7.6 | 7.7 | 7.8 | | | | 32 |
| 34 | 6.2 | 7.4 | 7.6 | 7.6 | 7.4 | | | 34 |
| 36 | 6.2 | 7.4 | 7.5 | 7.6 | 7.4 | 5.8 | | 36 |
| 38 | | 7.2 | 7.4 | 7.6 | 7.0 | 5.8 | 4.6 | 38 |
| 40 | | 7.1 | 7.3 | 7.5 | 6.6 | 5.4 | 4.6 | 40 |
| 42 | | 7.0 | 7.2 | 7.4 | 6.1 | 5.1 | 4.4 | 42 |
| 44 | | 7.0 | 7.1 | 7.2 | 5.7 | 4.8 | 4.2 | 44 |
| 46 | | 6.8 | 7.0 | 6.7 | 5.4 | 4.5 | 3.9 | 46 |
| 48 | | 6.8 | 6.8 | 6.3 | 5.1 | 4.3 | 3.7 | 48 |
| 50 | | 6.5 | 6.7 | 6.0 | 4.8 | 4.1 | 3.5 | 50 |
| 52 | | 6.5 | 6.5 | 5.7 | 4.6 | 3.9 | 3.3 | 52 |
| 54 | | 6.3 | 6.4 | 5.4 | 4.3 | 3.6 | 3.1 | 54 |
| 56 | | 6.1 | 6.3 | 5.0 | 4.1 | 3.4 | 2.9 | 56 |
| 58 | | 6.1 | 5.9 | 4.8 | 3.9 | 3.2 | 2.8 | 58 |
| 60 | | 5.9 | 5.6 | 4.6 | 3.7 | 3.0 | 2.6 | 60 |
| 62 | | 5.9 | 5.4 | 4.4 | 3.5 | 2.9 | 2.4 | 62 |
| 64 | | 5.8 | 4.9 | 4.0 | 3.3 | 2.7 | 2.3 | 64 |
| 66 | | | 4.5 | 3.6 | 3.0 | 2.7 | 2.2 | 66 |
| 68 | | | 4.0 | 3.3 | 2.6 | 2.5 | 2.0 | 68 |
| 70 | | | | 3.0 | 2.4 | 2.1 | | 70 |
| 72 | | | | 2.7 | 2.0 | | | 72 |
| 74 | | | | | | | | 74 |
| 组合 Code | 000000 | 211111 | 221111 | 222111 | 222211 | 222221 | 222222 | 组合 Code |
| 倍率 n | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 倍率 n |

起重性能表

T 16.1~79.5 m

Rated lifting load table




| | 16.1+3 m | 53.1+3 m | 58.4+3 m | 63.6+3 m | 68.9+3 m | 74.2+3 m | 79.5+3 m | |
|---------|----------|----------|----------|----------|----------|----------|----------|---------|
| | 40° | | | | | | | |
| | 18 m | | | | | | | |
| 16 | 10.8 | | | | | | | 16 |
| 18 | 10.8 | | | | | | | 18 |
| 20 | 10.4 | | | | | | | 20 |
| 22 | 10.0 | | | | | | | 22 |
| 24 | 9.6 | 10.8 | | | | | | 24 |
| 26 | 9.2 | 10.8 | 10.7 | | | | | 26 |
| 28 | 9.0 | 10.7 | 10.7 | 10.8 | 10.0 | | | 28 |
| 30 | 9.0 | 10.6 | 10.7 | 10.8 | 10.0 | 7.4 | | 30 |
| 32 | | 10.5 | 10.7 | 10.7 | 9.4 | 7.4 | 6.0 | 32 |
| 34 | | 10.3 | 10.5 | 10.4 | 8.8 | 7.4 | 6.0 | 34 |
| 36 | | 10.2 | 10.1 | 9.8 | 8.3 | 6.9 | 6.0 | 36 |
| 38 | | 9.8 | 9.9 | 9.2 | 7.8 | 6.5 | 5.7 | 38 |
| 40 | | 9.6 | 9.7 | 8.8 | 7.3 | 6.1 | 5.4 | 40 |
| 42 | | 9.4 | 9.4 | 8.1 | 6.9 | 5.8 | 5.1 | 42 |
| 44 | | 9.0 | 9.2 | 7.7 | 6.5 | 5.4 | 4.8 | 44 |
| 46 | | 8.8 | 9.0 | 7.3 | 6.2 | 5.2 | 4.6 | 46 |
| 48 | | 8.6 | 8.6 | 6.9 | 5.9 | 5.1 | 4.3 | 48 |
| 50 | | 8.6 | 8.2 | 6.7 | 5.6 | 4.6 | 4.1 | 50 |
| 52 | | 8.4 | 7.7 | 6.3 | 5.2 | 4.4 | 3.9 | 52 |
| 54 | | 8.1 | 7.3 | 6.0 | 5.0 | 4.2 | 3.7 | 54 |
| 56 | | 8.0 | 7.1 | 5.7 | 4.7 | 4.0 | 3.5 | 56 |
| 58 | | 7.9 | 6.4 | 5.5 | 4.5 | 3.8 | 3.4 | 58 |
| 60 | | | 5.8 | 4.9 | 4.3 | 3.6 | 3.2 | 60 |
| 62 | | | 5.3 | 4.4 | 3.9 | 3.5 | 3.0 | 62 |
| 64 | | | | 4.0 | 3.5 | 3.3 | 2.9 | 64 |
| 66 | | | | 3.6 | 3.2 | 3.0 | 2.8 | 66 |
| 68 | | | | | 2.8 | 2.7 | 2.5 | 68 |
| 70 | | | | | 2.5 | 2.4 | 2.3 | 70 |
| 72 | | | | | | 2.2 | 2.0 | 72 |
| 组合 Code | 000000 | 211111 | 221111 | 222111 | 222211 | 222221 | 222222 | 组合 Code |
| 倍率 n | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 倍率 n |

起重性能表

T 16.1~79.5 m

Rated lifting load table




| | 16.1+3 m | 53.1+3 m | 58.4+3 m | 63.6+3 m | 68.9+3 m | 74.2+3 m | 79.5+3 m | |
|---------|----------|----------|----------|----------|----------|----------|----------|---------|
| | 40° | | | | | | | |
| | 12 m | | | | | | | |
| 10 | 18.8 | | | | | | | 10 |
| 12 | 18.8 | | | | | | | 12 |
| 14 | 18.0 | | | | | | | 14 |
| 16 | 17.2 | | | | | | | 16 |
| 18 | 16.4 | 18.7 | | | | | | 18 |
| 20 | 15.9 | 17.9 | | | | | | 20 |
| 22 | 15.5 | 17.1 | 16.7 | | | | | 22 |
| 24 | 15.3 | 16.4 | 16.4 | 15.9 | | | | 24 |
| 26 | | 16.0 | 15.9 | 14.8 | 12.8 | | | 26 |
| 28 | | 15.2 | 15.2 | 14.0 | 11.9 | 10.3 | | 28 |
| 30 | | 14.8 | 14.8 | 13.0 | 11.1 | 9.6 | 7.4 | 30 |
| 32 | | 14.4 | 14.4 | 12.2 | 10.3 | 9.0 | 7.2 | 32 |
| 34 | | 14.0 | 13.7 | 11.4 | 9.7 | 8.4 | 7.0 | 34 |
| 36 | | 13.6 | 12.9 | 10.7 | 9.1 | 8.1 | 6.8 | 36 |
| 38 | | 13.2 | 12.0 | 10.0 | 8.7 | 7.6 | 6.5 | 38 |
| 40 | | 12.8 | 11.5 | 9.6 | 8.1 | 7.1 | 6.1 | 40 |
| 42 | | 12.4 | 10.9 | 9.0 | 7.7 | 6.7 | 5.9 | 42 |
| 44 | | 12.2 | 10.5 | 8.6 | 7.2 | 6.5 | 5.5 | 44 |
| 46 | | 11.9 | 9.9 | 8.2 | 6.8 | 6.1 | 5.3 | 46 |
| 48 | | 11.6 | 9.4 | 7.8 | 6.6 | 5.9 | 5.1 | 48 |
| 50 | | 11.0 | 9.0 | 7.4 | 6.2 | 5.5 | 4.9 | 50 |
| 52 | | 10.3 | 8.6 | 6.9 | 6.0 | 5.3 | 4.7 | 52 |
| 54 | | | 7.8 | 6.6 | 5.6 | 5.1 | 4.5 | 54 |
| 56 | | | 7.1 | 6.0 | 5.4 | 4.8 | 4.3 | 56 |
| 58 | | | | 5.4 | 4.9 | 4.6 | 4.0 | 58 |
| 60 | | | | 5.0 | 4.4 | 4.3 | 3.8 | 60 |
| 62 | | | | | 4.0 | 3.9 | 3.5 | 62 |
| 64 | | | | | 3.6 | 3.5 | 3.1 | 64 |
| 66 | | | | | | 3.2 | 2.9 | 66 |
| 68 | | | | | | 2.8 | 2.6 | 68 |
| 70 | | | | | | | 2.2 | 70 |
| 组合 Code | 000000 | 211111 | 221111 | 222111 | 222211 | 222221 | 222222 | 组合 Code |
| 倍率 n | 2 | 2 | 2 | 2 | 1 | 1 | 1 | 倍率 n |

起重性能表

T 16.1~79.5 m


Rated lifting load table



| | 16.1+3 m | 53.1+3 m | 58.4+3 m | 63.6+3 m | 68.9+3 m | 74.2+3 m | 79.5+3 m | |
|---------|----------|----------|----------|----------|----------|----------|----------|---------|
| | 40° | | | | | | | |
| | 6 m | | | | | | | |
| 6 | 27.4 | | | | | | | 6 |
| 7 | 27.4 | | | | | | | 7 |
| 8 | 26.6 | | | | | | | 8 |
| 9 | 25.8 | | | | | | | 9 |
| 10 | 25.0 | | | | | | | 10 |
| 12 | 23.7 | | | | | | | 12 |
| 14 | 22.9 | 24.0 | | | | | | 14 |
| 16 | 22.1 | 23.7 | 23.5 | | | | | 16 |
| 18 | 22.1 | 23.1 | 23.1 | | | | | 18 |
| 20 | | 22.5 | 22.5 | 21.2 | 18.3 | | | 20 |
| 22 | | 22.2 | 22.0 | 19.5 | 16.8 | 14.8 | | 22 |
| 24 | | 21.8 | 21.8 | 18.2 | 15.7 | 13.6 | | 24 |
| 26 | | 21.6 | 20.3 | 17.0 | 14.5 | 12.7 | 10.9 | 26 |
| 28 | | 21.3 | 18.6 | 15.8 | 13.6 | 12.0 | 10.1 | 28 |
| 30 | | 21.1 | 17.4 | 14.5 | 12.8 | 11.2 | 9.5 | 30 |
| 32 | | 19.8 | 16.5 | 13.6 | 11.8 | 10.4 | 8.9 | 32 |
| 34 | | 18.6 | 15.3 | 12.8 | 11.0 | 9.6 | 8.4 | 34 |
| 36 | | 17.5 | 14.5 | 12.1 | 10.4 | 9.1 | 8.0 | 36 |
| 38 | | 16.7 | 13.5 | 11.3 | 9.8 | 8.7 | 7.6 | 38 |
| 40 | | 15.8 | 12.6 | 10.8 | 9.2 | 8.2 | 7.2 | 40 |
| 42 | | 15.0 | 12.0 | 10.2 | 8.8 | 7.7 | 6.8 | 42 |
| 44 | | 14.1 | 11.1 | 9.6 | 8.4 | 7.3 | 6.4 | 44 |
| 46 | | 13.0 | 10.6 | 9.1 | 8.0 | 6.9 | 6.3 | 46 |
| 48 | | | 9.8 | 8.5 | 7.6 | 6.6 | 6.1 | 48 |
| 50 | | | 8.9 | 8.0 | 7.2 | 6.2 | 5.6 | 50 |
| 52 | | | | 7.2 | 6.5 | 6.0 | 5.4 | 52 |
| 54 | | | | 6.6 | 5.9 | 5.5 | 5.2 | 54 |
| 56 | | | | | 5.4 | 5.0 | 5.0 | 56 |
| 58 | | | | | 4.9 | 4.6 | 4.6 | 58 |
| 60 | | | | | | 4.2 | 4.2 | 60 |
| 62 | | | | | | 3.8 | 3.8 | 62 |
| 64 | | | | | | | 3.2 | 64 |
| 66 | | | | | | | 2.7 | 66 |
| 68 | | | | | | | | 68 |
| 70 | | | | | | | | 70 |
| 组合 Code | 000000 | 211111 | 221111 | 222111 | 222211 | 222221 | 222222 | 组合 Code |
| 倍率 n | 3 | 2 | 2 | 2 | 2 | 2 | 1 | 倍率 n |

起升高度曲线图 Lifting height chart


主臂+副臂
Boom + Jib

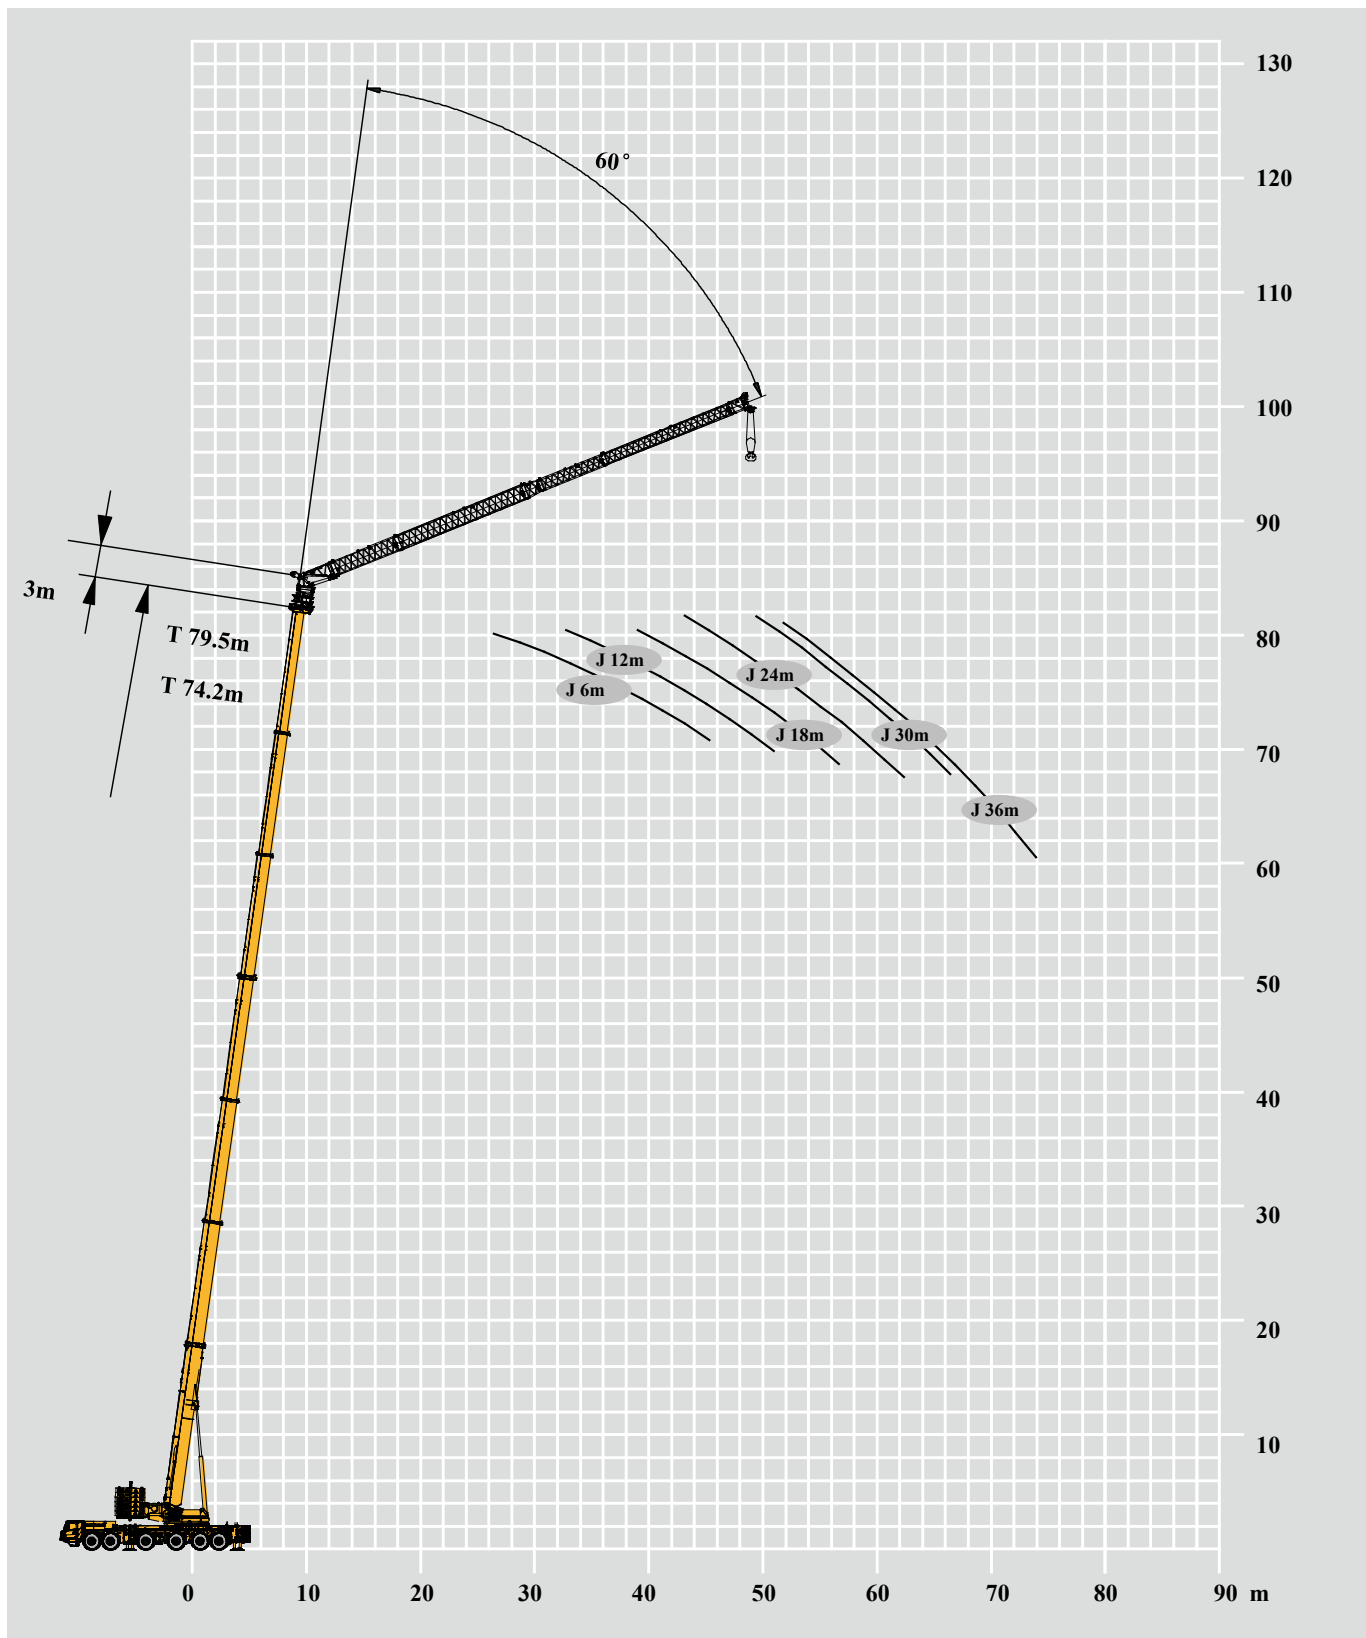

起重性能表

T 16.1~74.2 m

Rated lifting load table






| m | 16.1+3 m | 53.1+3 m | 58.4+3 m | 63.6+3 m | 68.9+3 m | 74.2+3 m | m |
|---------|----------|----------|----------|----------|----------|----------|---------|
| | 60° | | | | | | |
| | 36 m | | | | | | |
| 36 | 3.5 | | | | | | 36 |
| 38 | 3.4 | | | | | | 38 |
| 40 | 3.3 | | | | | | 40 |
| 42 | 3.3 | | | | | | 42 |
| 44 | 3.3 | 3.5 | | | | | 44 |
| 46 | 3.3 | 3.4 | 3.4 | | | | 46 |
| 48 | | 3.4 | 3.4 | 3.5 | | | 48 |
| 50 | | 3.4 | 3.4 | 3.5 | 3.5 | | 50 |
| 52 | | 3.4 | 3.4 | 3.5 | 3.5 | 2.8 | 52 |
| 54 | | 3.4 | 3.4 | 3.5 | 3.5 | 2.7 | 54 |
| 56 | | 3.4 | 3.4 | 3.5 | 3.5 | 2.7 | 56 |
| 58 | | 3.3 | 3.4 | 3.4 | 3.5 | 2.6 | 58 |
| 60 | | 3.3 | 3.3 | 3.4 | 3.4 | 2.6 | 60 |
| 62 | | | 3.3 | 3.4 | 3.3 | 2.6 | 62 |
| 64 | | | 3.3 | 3.4 | 3.3 | 2.5 | 64 |
| 66 | | | | 3.3 | 3.1 | 2.5 | 66 |
| 68 | | | | | 3.0 | 2.5 | 68 |
| 70 | | | | | | 2.5 | 70 |
| 72 | | | | | | | 72 |
| 74 | | | | | | | 74 |
| 组合 Code | 000000 | 211111 | 221111 | 222111 | 222211 | 222221 | 组合 Code |
| 倍率 n | 1 | 1 | 1 | 1 | 1 | 1 | 倍率 n |

起重性能表

T 16.1~79.5 m

Rated lifting load table




| |  | | | | | |  |
|---------|--|----------|----------|----------|----------|----------|---|
| | 53.1+3 m | 58.4+3 m | 63.6+3 m | 68.9+3 m | 74.2+3 m | 79.5+3 m | |
| | 60° | | | | | | |
| | 30 m | | | | | | |
| 30 | | | | | | | 30 |
| 32 | | | | | | | 32 |
| 34 | | | | | | | 34 |
| 36 | | | | | | | 36 |
| 38 | 4.6 | | | | | | 38 |
| 40 | 4.6 | 4.6 | | | | | 40 |
| 42 | 4.6 | 4.6 | 4.7 | | | | 42 |
| 44 | 4.6 | 4.6 | 4.7 | 4.8 | | | 44 |
| 46 | 4.6 | 4.6 | 4.7 | 4.8 | | | 46 |
| 48 | 4.6 | 4.6 | 4.7 | 4.8 | 4.0 | | 48 |
| 50 | 4.6 | 4.6 | 4.7 | 4.8 | 3.8 | 3.1 | 50 |
| 52 | 4.6 | 4.6 | 4.7 | 4.8 | 3.8 | 3.1 | 52 |
| 54 | 4.6 | 4.5 | 4.6 | 4.7 | 3.7 | 3.0 | 54 |
| 56 | | 4.5 | 4.6 | 4.5 | 3.7 | 3.0 | 56 |
| 58 | | 4.5 | 4.6 | 4.4 | 3.6 | 3.0 | 58 |
| 60 | | | 4.5 | 4.3 | 3.6 | 2.9 | 60 |
| 62 | | | | 4.0 | 3.5 | 2.8 | 62 |
| 64 | | | | | 3.5 | 2.7 | 64 |
| 66 | | | | | 3.5 | 2.6 | 66 |
| 68 | | | | | | | 68 |
| 70 | | | | | | | 70 |
| 72 | | | | | | | 72 |
| 组合 Code | 211111 | 221111 | 222111 | 222211 | 222221 | 222222 | 组合 Code |
| 倍率 n | 1 | 1 | 1 | 1 | 1 | 1 | 倍率 n |

起重性能表

T 16.1~79.5 m

Rated lifting load table






| | 53.1+3 m | 58.4+3 m | 63.6+3 m | 68.9+3 m | 74.2+3 m | 79.5+3 m | |
|---------|----------|----------|----------|----------|----------|----------|---------|
| | 60° | | | | | | |
| | 24 m | | | | | | |
| 26 | | | | | | | 26 |
| 28 | | | | | | | 28 |
| 30 | | | | | | | 30 |
| 32 | 7.0 | | | | | | 32 |
| 34 | 7.0 | 7.0 | | | | | 34 |
| 36 | 7.0 | 7.0 | 7.2 | | | | 36 |
| 38 | 7.0 | 7.0 | 7.2 | 6.9 | | | 38 |
| 40 | 7.0 | 7.0 | 7.2 | 6.7 | | | 40 |
| 42 | 7.0 | 7.0 | 7.1 | 6.5 | 5.4 | | 42 |
| 44 | 7.0 | 7.0 | 6.9 | 6.4 | 5.2 | 4.4 | 44 |
| 46 | 6.8 | 6.8 | 6.9 | 6.2 | 5.1 | 4.3 | 46 |
| 48 | 6.7 | 6.7 | 6.7 | 6.2 | 5.1 | 4.2 | 48 |
| 50 | | 6.7 | 6.7 | 5.9 | 4.9 | 4.1 | 50 |
| 52 | | 6.5 | 6.5 | 5.8 | 4.9 | 4.1 | 52 |
| 54 | | | 6.5 | 5.7 | 4.7 | 4.0 | 54 |
| 56 | | | | 5.4 | 4.7 | 3.9 | 56 |
| 58 | | | | | 4.7 | 3.7 | 58 |
| 60 | | | | | 4.5 | 3.6 | 60 |
| 62 | | | | | | 3.5 | 62 |
| 64 | | | | | | | 64 |
| 66 | | | | | | | 66 |
| 组合 Code | 211111 | 221111 | 222111 | 222211 | 222221 | 222222 | 组合 Code |
| 倍率 n | 1 | 1 | 1 | 1 | 1 | 1 | 倍率 n |

起重性能表

T 16.1~79.5 m

Rated lifting load table




| |  | | | | | |  |
|---------|--|----------|----------|----------|----------|----------|---|
| | 53.1+3 m | 58.4+3 m | 63.6+3 m | 68.9+3 m | 74.2+3 m | 79.5+3 m | |
| | 60° | | | | | | |
| 18 m | | | | | | | |
| 20 | | | | | | | 20 |
| 22 | | | | | | | 22 |
| 24 | | | | | | | 24 |
| 26 | | | | | | | 26 |
| 28 | 10.2 | 10.4 | | | | | 28 |
| 30 | 10.2 | 10.4 | 10.3 | | | | 30 |
| 32 | 10.2 | 10.2 | 10.1 | | | | 32 |
| 34 | 10.1 | 10.0 | 9.9 | 9.0 | | | 34 |
| 36 | 9.8 | 9.8 | 9.7 | 8.7 | 7.4 | | 36 |
| 38 | 9.7 | 9.6 | 9.6 | 8.4 | 7.2 | 5.7 | 38 |
| 40 | 9.5 | 9.4 | 9.4 | 8.3 | 7.0 | 5.7 | 40 |
| 42 | 9.3 | 9.2 | 9.0 | 8.1 | 6.8 | 5.6 | 42 |
| 44 | | 9.2 | 8.9 | 7.9 | 6.6 | 5.5 | 44 |
| 46 | | 9.0 | 8.6 | 7.7 | 6.4 | 5.4 | 46 |
| 48 | | | 8.3 | 7.4 | 6.3 | 5.4 | 48 |
| 50 | | | | 7.1 | 6.2 | 5.2 | 50 |
| 52 | | | | | 6.1 | 5.2 | 52 |
| 54 | | | | | 6.0 | 5.2 | 54 |
| 56 | | | | | | 4.9 | 56 |
| 58 | | | | | | | 58 |
| 60 | | | | | | | 60 |
| 组合 Code | 211111 | 221111 | 222111 | 222211 | 222221 | 222222 | 组合 Code |
| 倍率 n | 1 | 1 | 1 | 1 | 1 | 1 | 倍率 n |

起重性能表

T 16.1~79.5 m

Rated lifting load table




| | <div style="display: flex; justify-content: space-between; width: 100%;"> 53.1+3 m 58.4+3 m 63.6+3 m 68.9+3 m 74.2+3 m 79.5+3 m </div> | | | | | | |
|---------|--|--------|--------|--------|--------|--------|---------|
| | 60° | | | | | | |
| | 12 m | | | | | | |
| 12 | | | | | | | 12 |
| 14 | | | | | | | 14 |
| 16 | | | | | | | 16 |
| 18 | | | | | | | 18 |
| 20 | 15.6 | | | | | | 20 |
| 22 | 15.5 | 15.1 | | | | | 22 |
| 24 | 15.4 | 15.1 | | | | | 24 |
| 26 | 15.2 | 15.1 | 14.9 | | | | 26 |
| 28 | 14.8 | 14.8 | 14.5 | 12.4 | | | 28 |
| 30 | 14.4 | 14.4 | 13.9 | 11.8 | 9.1 | | 30 |
| 32 | 14.1 | 14.0 | 13.4 | 11.5 | 9.0 | 5.9 | 32 |
| 34 | 13.8 | 13.8 | 13.0 | 11.1 | 8.8 | 5.8 | 34 |
| 36 | 13.5 | 13.6 | 12.6 | 10.7 | 8.6 | 5.7 | 36 |
| 38 | | 13.2 | 12.0 | 10.3 | 8.4 | 5.6 | 38 |
| 40 | | 13.1 | 11.4 | 10.0 | 8.3 | 5.4 | 40 |
| 42 | | | 10.9 | 9.6 | 8.1 | 5.3 | 42 |
| 44 | | | | 9.3 | 7.8 | 5.2 | 44 |
| 46 | | | | | 7.6 | 5.1 | 46 |
| 48 | | | | | 7.4 | 5.1 | 48 |
| 50 | | | | | | 5.0 | 50 |
| 52 | | | | | | | 52 |
| 54 | | | | | | | 54 |
| 组合 Code | 211111 | 221111 | 222111 | 222211 | 222221 | 222222 | 组合 Code |
| 倍率 n | 2 | 2 | 2 | 1 | 1 | 1 | 倍率 n |

起重性能表

T 16.1~79.5 m

Rated lifting load table



| | 53.1+3 m | 58.4+3 m | 63.6+3 m | 68.9+3 m | 74.2+3 m | 79.5+3 m | |
|---------|----------|----------|----------|----------|----------|----------|---------|
| | 60° | | | | | | |
| | 6 m | | | | | | |
| 7 | | | | | | | 7 |
| 8 | | | | | | | 8 |
| 9 | | | | | | | 9 |
| 10 | | | | | | | 10 |
| 12 | | | | | | | 12 |
| 14 | 20.8 | | | | | | 14 |
| 16 | 20.8 | 20.5 | | | | | 16 |
| 18 | 20.8 | 20.5 | | | | | 18 |
| 20 | 20.5 | 20.5 | 20.3 | | | | 20 |
| 22 | 20.4 | 20.5 | 20.1 | 17.0 | | | 22 |
| 24 | 20.4 | 20.1 | 19.7 | 16.0 | 14.1 | | 24 |
| 26 | 20.4 | 20.1 | 18.7 | 15.3 | 13.4 | 11.8 | 26 |
| 28 | 20.4 | 19.8 | 17.8 | 14.6 | 12.8 | 11.3 | 28 |
| 30 | 20.3 | 19.6 | 17.0 | 14.2 | 12.4 | 10.9 | 30 |
| 32 | | 18.8 | 16.1 | 13.4 | 12.0 | 10.4 | 32 |
| 34 | | 17.9 | 15.3 | 12.9 | 11.6 | 10.0 | 34 |
| 36 | | | 14.4 | 12.4 | 11.2 | 9.7 | 36 |
| 38 | | | | 11.9 | 10.7 | 9.4 | 38 |
| 40 | | | | | 10.3 | 9.3 | 40 |
| 42 | | | | | 9.9 | 9.1 | 42 |
| 44 | | | | | | 8.6 | 44 |
| 46 | | | | | | | 46 |
| 48 | | | | | | | 48 |
| 组合 Code | 211111 | 221111 | 222111 | 222211 | 222221 | 222222 | 组合 Code |
| 倍率 n | 2 | 2 | 2 | 2 | 2 | 1 | 倍率 n |

起升高度曲线图
Lifting height chart

主臂+超起+副臂
Boom+ Super lifting device + Jib



起重性能表

Rated lifting load table

T 53.1~79.5 m



| m | 53.1 | 53.1 | 53.1 | 58.4 | 58.4 | 58.4 | 63.6 | 63.6 | 63.6 | 68.9 | 68.9 | 74.2 | 74.2 | 79.5 | m |
|---------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|---------|
| | 6.5m | | | | | | | | | | | | | | |
| | 0° | | | | | | | | | | | | | | |
| | 42 m | | | | | | | | | | | | | | |
| 18 | 13.4 | 13.3 | 13.2 | 13.0 | 13.5 | 13.6 | | | | | | | | | 18 |
| 20 | 12.5 | 12.6 | 12.6 | 12.5 | 12.7 | 12.8 | | | | | | | | | 20 |
| 22 | 11.7 | 11.7 | 11.7 | 11.9 | 11.9 | 12.1 | 11.7 | 12.0 | 12.0 | 11.1 | 11.3 | | | | 22 |
| 24 | 11.0 | 11.0 | 11.0 | 11.2 | 11.1 | 11.2 | 11.2 | 11.4 | 11.3 | 10.7 | 11.0 | 9.7 | 10.2 | | 24 |
| 26 | 10.4 | 10.5 | 10.5 | 10.7 | 10.7 | 10.7 | 10.7 | 10.8 | 10.8 | 10.3 | 10.6 | 9.4 | 9.9 | 4.4 | 26 |
| 28 | 9.8 | 9.7 | 9.9 | 10.0 | 10.1 | 10.1 | 10.2 | 10.3 | 10.2 | 10.0 | 10.2 | 9.1 | 9.7 | 4.3 | 28 |
| 30 | 9.2 | 9.2 | 9.1 | 9.4 | 9.5 | 9.4 | 9.6 | 9.8 | 9.7 | 9.6 | 9.8 | 8.5 | 9.1 | 4.2 | 30 |
| 32 | 8.6 | 8.6 | 8.6 | 8.8 | 8.9 | 9.0 | 9.1 | 9.2 | 9.3 | 9.2 | 9.2 | 7.9 | 8.4 | 4.1 | 32 |
| 34 | 8.0 | 8.1 | 8.1 | 8.4 | 8.4 | 8.4 | 8.7 | 8.7 | 8.7 | 8.6 | 8.8 | 7.3 | 7.7 | 4.0 | 34 |
| 36 | 7.6 | 7.6 | 7.7 | 8.0 | 8.0 | 8.0 | 8.2 | 8.3 | 8.3 | 8.2 | 8.4 | 6.7 | 7.0 | 3.9 | 36 |
| 38 | 7.2 | 7.2 | 7.3 | 7.6 | 7.6 | 7.6 | 7.8 | 7.8 | 7.9 | 7.9 | 8.0 | 6.0 | 6.3 | 3.8 | 38 |
| 40 | 6.8 | 6.8 | 6.9 | 7.2 | 7.2 | 7.2 | 7.4 | 7.4 | 7.5 | 7.6 | 7.6 | 5.2 | 5.4 | 3.7 | 40 |
| 42 | 6.5 | 6.5 | 6.5 | 6.8 | 6.8 | 6.8 | 7.0 | 7.1 | 7.1 | 7.2 | 7.3 | 4.5 | 4.7 | 3.4 | 42 |
| 44 | 6.2 | 6.2 | 6.2 | 6.4 | 6.5 | 6.5 | 6.7 | 6.7 | 6.8 | 6.9 | 6.9 | 3.9 | 4.0 | 3.1 | 44 |
| 46 | 5.9 | 5.9 | 5.9 | 6.1 | 6.2 | 6.2 | 6.4 | 6.5 | 6.5 | 6.6 | 6.7 | 3.4 | 3.4 | 2.8 | 46 |
| 48 | 5.7 | 5.6 | 5.6 | 5.9 | 5.9 | 5.9 | 6.1 | 6.2 | 6.2 | 6.4 | 6.4 | 2.7 | 2.8 | 2.5 | 48 |
| 50 | 5.4 | 5.4 | 5.4 | 5.6 | 5.7 | 5.7 | 5.9 | 6.0 | 6.0 | 6.1 | 6.2 | 2.1 | 2.2 | 2.2 | 50 |
| 52 | 5.1 | 5.1 | 5.1 | 5.4 | 5.5 | 5.4 | 5.7 | 5.7 | 5.7 | 5.9 | 5.9 | | | | 52 |
| 54 | 4.9 | 4.9 | 4.9 | 5.2 | 5.2 | 5.2 | 5.4 | 5.5 | 5.5 | 5.7 | 5.6 | | | | 54 |
| 56 | 4.7 | 4.7 | 4.7 | 5.0 | 4.9 | 5.0 | 5.2 | 5.2 | 5.3 | 5.5 | 5.4 | | | | 56 |
| 58 | 4.5 | 4.5 | 4.5 | 4.8 | 4.7 | 4.8 | 5.0 | 5.0 | 5.1 | 5.3 | 5.2 | | | | 58 |
| 60 | 4.3 | 4.3 | 4.3 | 4.6 | 4.5 | 4.6 | 4.8 | 4.8 | 4.8 | 5.1 | 5.0 | | | | 60 |
| 62 | 4.2 | 4.1 | 4.2 | 4.4 | 4.4 | 4.4 | 4.6 | 4.6 | 4.6 | 4.8 | 4.8 | | | | 62 |
| 64 | 3.9 | 4.0 | 4.0 | 4.2 | 4.2 | 4.2 | 4.5 | 4.4 | 4.4 | 4.7 | 4.7 | | | | 64 |
| 66 | 3.8 | 3.8 | 3.8 | 4.0 | 4.1 | 4.0 | 4.3 | 4.3 | 4.3 | 4.5 | 4.5 | | | | 66 |
| 68 | 3.7 | 3.7 | 3.7 | 3.9 | 3.9 | 3.9 | 4.2 | 4.1 | 4.1 | 4.4 | 4.4 | | | | 68 |
| 70 | 3.5 | 3.5 | 3.5 | 3.7 | 3.8 | 3.8 | 4.0 | 4.0 | 4.0 | 4.3 | 4.2 | | | | 70 |
| 72 | 3.4 | 3.4 | 3.4 | 3.6 | 3.6 | 3.6 | 3.9 | 3.9 | 3.8 | 4.1 | 4.0 | | | | 72 |
| 74 | 3.3 | 3.3 | 3.3 | 3.5 | 3.5 | 3.2 | 3.7 | 3.5 | 3.3 | 3.9 | 3.4 | | | | 74 |
| 76 | 3.2 | 3.2 | 2.8 | 3.4 | 3.3 | 2.7 | 3.4 | 3.0 | 2.8 | 3.6 | 2.9 | | | | 76 |
| 78 | 3.1 | 3.0 | 2.3 | 3.2 | 2.8 | 2.2 | 2.9 | 2.5 | 2.3 | 3.1 | 2.4 | | | | 78 |
| 80 | 3.0 | 2.8 | | 2.7 | 2.3 | | 2.5 | 2.0 | | 2.6 | | | | | 80 |
| 82 | 2.6 | 2.4 | | 2.3 | | | 2.0 | | | 2.1 | | | | | 82 |
| 84 | 2.2 | | | | | | | | | | | | | | 84 |
| 组合 Code | 121111 | 211111 | 222100 | 122111 | 221111 | 222200 | 122220 | 222111 | 222210 | 122221 | 222211 | 122222 | 222221 | 222222 | 组合 Code |
| 倍率 n | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 倍率 n |

起重性能表

Rated lifting load table

T 53.1~79.5 m

| m | 53.1-79.5 m | | 6.5 m | | 36 m | | 9.4×9.6 m | | 360° | | 153 t | | SA | | m |
|---------|-------------|--------|--------|--------|--------|--------|-----------|--------|--------|--------|--------|--------|--------|--------|---------|
| | 53.1 | 53.1 | 53.1 | 58.4 | 58.4 | 58.4 | 63.6 | 63.6 | 63.6 | 68.9 | 68.9 | 74.2 | 74.2 | 79.5 | |
| | 6.5m | | | | | | | | | | | | | | |
| | 0° | | | | | | | | | | | | | | |
| 36 m | | | | | | | | | | | | | | | |
| 18 | 15.8 | 15.8 | 16.0 | 15.6 | 15.8 | 15.9 | | | | | | | | | 18 |
| 20 | 14.9 | 14.9 | 15.0 | 14.9 | 15.0 | 15.2 | 14.7 | 15.0 | 14.9 | 14.3 | 15.0 | | | | 20 |
| 22 | 14.1 | 14.0 | 14.2 | 14.1 | 14.3 | 14.4 | 14.2 | 14.3 | 14.4 | 13.8 | 14.2 | 10.0 | 10.2 | | 22 |
| 24 | 13.1 | 13.1 | 13.2 | 13.5 | 13.5 | 13.7 | 13.7 | 13.6 | 13.8 | 13.2 | 13.5 | 9.8 | 10.0 | 5.2 | 24 |
| 26 | 12.3 | 12.3 | 12.4 | 12.7 | 12.7 | 12.7 | 12.9 | 13.0 | 13.0 | 12.7 | 12.8 | 9.6 | 9.8 | 5.2 | 26 |
| 28 | 11.5 | 11.5 | 11.6 | 11.9 | 11.9 | 11.9 | 12.2 | 12.2 | 12.3 | 12.1 | 12.3 | 9.3 | 9.6 | 5.2 | 28 |
| 30 | 11.0 | 11.0 | 11.0 | 11.2 | 11.3 | 11.2 | 11.6 | 11.6 | 11.6 | 11.5 | 11.7 | 9.1 | 9.4 | 5.2 | 30 |
| 32 | 10.5 | 10.6 | 10.6 | 10.7 | 10.8 | 10.8 | 11.0 | 11.1 | 11.1 | 11.0 | 11.2 | 8.9 | 9.2 | 5.2 | 32 |
| 34 | 10.0 | 10.0 | 10.0 | 10.3 | 10.3 | 10.5 | 10.6 | 10.6 | 10.6 | 10.7 | 10.9 | 8.6 | 9.0 | 5.2 | 34 |
| 36 | 9.4 | 9.4 | 9.4 | 9.7 | 9.8 | 9.9 | 10.2 | 10.2 | 10.3 | 10.4 | 10.5 | 8.4 | 8.7 | 5.0 | 36 |
| 38 | 8.9 | 9.0 | 9.0 | 9.4 | 9.4 | 9.4 | 9.6 | 9.7 | 9.8 | 9.9 | 10.0 | 8.0 | 8.3 | 4.5 | 38 |
| 40 | 8.5 | 8.6 | 8.6 | 8.9 | 8.9 | 9.0 | 9.3 | 9.2 | 9.3 | 9.5 | 9.6 | 7.6 | 7.9 | 3.8 | 40 |
| 42 | 8.1 | 8.2 | 8.2 | 8.5 | 8.5 | 8.6 | 8.9 | 8.8 | 8.9 | 9.1 | 9.2 | 7.2 | 7.5 | 3.1 | 42 |
| 44 | 7.7 | 7.8 | 7.8 | 8.0 | 8.1 | 8.2 | 8.5 | 8.4 | 8.5 | 8.7 | 8.7 | 6.9 | 7.1 | 2.4 | 44 |
| 46 | 7.3 | 7.4 | 7.4 | 7.7 | 7.7 | 7.7 | 8.0 | 8.0 | 8.1 | 8.3 | 8.4 | 6.5 | 6.8 | | 46 |
| 48 | 7.0 | 7.0 | 7.0 | 7.4 | 7.4 | 7.4 | 7.7 | 7.7 | 7.8 | 8.0 | 8.1 | 6.0 | 6.2 | | 48 |
| 50 | 6.7 | 6.7 | 6.7 | 7.1 | 7.1 | 7.1 | 7.4 | 7.4 | 7.4 | 7.7 | 7.8 | 5.7 | 5.9 | | 50 |
| 52 | 6.5 | 6.4 | 6.5 | 6.9 | 6.8 | 6.8 | 7.1 | 7.1 | 7.2 | 7.5 | 7.5 | 5.2 | 5.5 | | 52 |
| 54 | 6.2 | 6.2 | 6.2 | 6.5 | 6.6 | 6.6 | 6.9 | 6.9 | 6.9 | 7.1 | 7.2 | 4.7 | 4.8 | | 54 |
| 56 | 6.0 | 5.9 | 6.0 | 6.3 | 6.3 | 6.3 | 6.7 | 6.6 | 6.7 | 6.9 | 6.9 | 4.1 | 4.2 | | 56 |
| 58 | 5.8 | 5.7 | 5.8 | 6.1 | 6.0 | 6.1 | 6.4 | 6.4 | 6.4 | 6.7 | 6.7 | 3.6 | 3.8 | | 58 |
| 60 | 5.5 | 5.5 | 5.5 | 5.9 | 5.8 | 5.8 | 6.2 | 6.2 | 6.2 | 6.5 | 6.5 | 3.3 | 3.4 | | 60 |
| 62 | 5.2 | 5.3 | 5.3 | 5.6 | 5.6 | 5.6 | 6.0 | 5.9 | 6.0 | 6.3 | 6.3 | 3.2 | 3.3 | | 62 |
| 64 | 5.0 | 5.1 | 5.1 | 5.4 | 5.4 | 5.4 | 5.8 | 5.7 | 5.8 | 6.1 | 6.1 | 2.6 | 2.6 | | 64 |
| 66 | 4.9 | 4.9 | 5.0 | 5.2 | 5.2 | 5.2 | 5.6 | 5.5 | 5.3 | 5.9 | 5.5 | 2.5 | 2.5 | | 66 |
| 68 | 4.7 | 4.8 | 4.6 | 5.0 | 5.1 | 4.6 | 5.3 | 5.0 | 4.7 | 5.6 | 4.9 | 2.0 | 2.4 | | 68 |
| 70 | 4.6 | 4.6 | 4.0 | 4.9 | 4.6 | 3.9 | 4.8 | 4.3 | 4.0 | 5.0 | 4.2 | | | | 70 |
| 72 | 4.4 | 4.5 | 3.4 | 4.4 | 4.0 | 3.3 | 4.2 | 3.7 | 3.5 | 4.4 | 3.7 | | | | 72 |
| 74 | 4.1 | 3.9 | 2.8 | 3.9 | 3.4 | 2.8 | 3.6 | 3.2 | 2.9 | 3.8 | 3.1 | | | | 74 |
| 76 | 3.6 | 3.4 | 2.3 | 3.3 | 2.9 | 2.3 | 3.1 | 2.7 | 2.4 | 3.3 | 2.6 | | | | 76 |
| 78 | 3.1 | 2.9 | | 2.8 | 2.4 | | 2.6 | 2.2 | | 2.8 | 2.1 | | | | 78 |
| 80 | 2.6 | 2.4 | | 2.3 | | | 2.1 | | | 2.3 | | | | | 80 |
| 82 | 2.2 | | | | | | | | | | | | | | 82 |
| 组合 Code | 121111 | 211111 | 222100 | 122111 | 221111 | 222200 | 122220 | 222111 | 222210 | 122221 | 222211 | 122222 | 222221 | 222222 | 组合 Code |
| 倍率 n | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 1 | 1 | 1 | 倍率 n |

起重性能表

Rated lifting load table

T 53.1~79.5 m

| m | 53.1-79.5 m | | 6.5 m | | 30 m | | 9.4×9.6 m | | 360° | | 153 t | | SL | | m |
|---------|-------------|--------|--------|--------|--------|--------|-----------|--------|--------|--------|--------|--------|--------|--------|---------|
| | 53.1 | 53.1 | 53.1 | 58.4 | 58.4 | 58.4 | 63.6 | 63.6 | 63.6 | 68.9 | 68.9 | 74.2 | 74.2 | 79.5 | |
| | 6.5m | | | | | | | | | | | | | | |
| | 0° | | | | | | | | | | | | | | |
| 30 m | | | | | | | | | | | | | | | |
| 16 | 20.1 | 20.1 | 20.0 | | | | | | | | | | | | 16 |
| 18 | 18.9 | 18.8 | 18.9 | 18.8 | 18.9 | 19.1 | 18.7 | 18.9 | 19.2 | | | | | | 18 |
| 20 | 17.4 | 17.5 | 17.5 | 17.9 | 17.8 | 18.0 | 18.0 | 18.0 | 18.1 | 17.5 | 17.8 | | | | 20 |
| 22 | 16.2 | 16.1 | 16.3 | 16.7 | 16.6 | 16.8 | 17.1 | 17.2 | 17.3 | 16.8 | 17.1 | 14.6 | 15.0 | | 22 |
| 24 | 15.1 | 15.0 | 15.1 | 15.5 | 15.6 | 15.6 | 15.9 | 16.1 | 16.2 | 16.0 | 16.3 | 14.1 | 14.4 | 6.9 | 24 |
| 26 | 14.1 | 14.1 | 14.2 | 14.6 | 14.6 | 14.7 | 15.1 | 15.1 | 15.0 | 15.3 | 15.4 | 13.5 | 13.9 | 6.9 | 26 |
| 28 | 13.1 | 13.3 | 13.4 | 13.7 | 13.8 | 13.8 | 14.2 | 14.1 | 14.3 | 14.3 | 14.7 | 13.0 | 13.3 | 6.9 | 28 |
| 30 | 12.4 | 12.5 | 12.6 | 12.8 | 13.0 | 12.9 | 13.3 | 13.4 | 13.5 | 13.5 | 13.9 | 12.4 | 12.7 | 6.9 | 30 |
| 32 | 11.8 | 11.7 | 11.8 | 12.2 | 12.2 | 12.3 | 12.7 | 12.8 | 12.7 | 13.0 | 13.1 | 11.8 | 12.1 | 6.9 | 32 |
| 34 | 11.2 | 11.2 | 11.2 | 11.6 | 11.6 | 11.7 | 12.0 | 12.0 | 12.1 | 12.4 | 12.4 | 11.3 | 11.5 | 6.9 | 34 |
| 36 | 10.7 | 10.7 | 10.8 | 11.0 | 11.1 | 11.1 | 11.5 | 11.4 | 11.5 | 11.8 | 12.0 | 10.8 | 10.9 | 6.9 | 36 |
| 38 | 10.5 | 10.5 | 10.5 | 10.7 | 10.8 | 10.8 | 11.0 | 11.0 | 10.9 | 11.2 | 11.4 | 10.2 | 10.2 | 6.2 | 38 |
| 40 | 9.9 | 9.9 | 10.0 | 10.4 | 10.4 | 10.5 | 10.8 | 10.7 | 10.8 | 10.9 | 10.9 | 9.7 | 9.7 | 5.4 | 40 |
| 42 | 9.5 | 9.5 | 9.6 | 10.0 | 10.0 | 10.0 | 10.4 | 10.5 | 10.4 | 10.7 | 10.8 | 9.2 | 9.3 | 5.0 | 42 |
| 44 | 9.1 | 9.1 | 9.2 | 9.6 | 9.6 | 9.5 | 10.0 | 9.9 | 10.0 | 10.3 | 10.4 | 8.8 | 8.8 | 4.6 | 44 |
| 46 | 8.7 | 8.7 | 8.7 | 9.2 | 9.2 | 9.1 | 9.6 | 9.5 | 9.6 | 9.9 | 10.0 | 8.4 | 8.5 | 4.1 | 46 |
| 48 | 8.3 | 8.3 | 8.3 | 8.8 | 8.8 | 8.8 | 9.2 | 9.1 | 9.2 | 9.5 | 9.6 | 8.0 | 8.2 | 3.4 | 48 |
| 50 | 7.9 | 7.9 | 8.0 | 8.4 | 8.4 | 8.5 | 8.8 | 8.9 | 8.8 | 9.3 | 9.3 | 7.8 | 7.8 | 3.0 | 50 |
| 52 | 7.7 | 7.7 | 7.7 | 8.1 | 8.1 | 8.1 | 8.5 | 8.5 | 8.6 | 8.9 | 8.9 | 7.5 | 7.5 | 2.5 | 52 |
| 54 | 7.3 | 7.3 | 7.4 | 7.8 | 7.8 | 7.8 | 8.2 | 8.2 | 8.2 | 8.6 | 8.7 | 7.2 | 7.2 | 2.0 | 54 |
| 56 | 7.1 | 7.1 | 7.1 | 7.5 | 7.6 | 7.5 | 8.0 | 7.9 | 8.0 | 8.3 | 8.3 | 7.0 | 7.0 | | 56 |
| 58 | 6.8 | 6.8 | 6.8 | 7.2 | 7.2 | 7.3 | 7.6 | 7.7 | 7.6 | 8.1 | 8.1 | 6.8 | 6.7 | | 58 |
| 60 | 6.6 | 6.6 | 6.6 | 7.0 | 6.9 | 7.0 | 7.4 | 7.4 | 7.2 | 7.8 | 7.5 | 6.8 | 6.2 | | 60 |
| 62 | 6.4 | 6.4 | 6.2 | 6.8 | 6.7 | 6.2 | 7.2 | 6.7 | 6.4 | 7.4 | 6.7 | 6.6 | 5.9 | | 62 |
| 64 | 6.2 | 6.2 | 5.5 | 6.6 | 6.2 | 5.5 | 6.4 | 5.9 | 5.7 | 6.7 | 5.9 | 6.0 | 5.2 | | 64 |
| 66 | 6.0 | 5.9 | 4.8 | 5.9 | 5.5 | 4.8 | 5.7 | 5.2 | 4.9 | 5.9 | 5.2 | 6.0 | 5.2 | | 66 |
| 68 | 5.5 | 5.2 | 4.1 | 5.2 | 4.8 | 4.1 | 5.1 | 4.6 | 4.3 | 5.3 | 4.5 | 5.3 | 4.5 | | 68 |
| 70 | 4.9 | 4.6 | 3.5 | 4.6 | 4.2 | 3.5 | 4.4 | 3.9 | 3.7 | 4.7 | 3.9 | 4.5 | 3.8 | | 70 |
| 72 | 4.3 | 4.0 | 2.9 | 4.0 | 3.6 | 2.9 | 3.8 | 3.4 | 3.1 | 4.1 | 3.3 | 4.2 | 3.4 | | 72 |
| 74 | 3.7 | 3.4 | 2.3 | 3.5 | 3.0 | 2.3 | 3.3 | 2.8 | 2.5 | 3.5 | 2.8 | 3.6 | 2.8 | | 74 |
| 76 | 3.2 | 2.9 | | 2.9 | 2.5 | | 2.8 | 2.3 | 2.0 | 3.0 | 2.2 | 3.0 | 2.3 | | 76 |
| 78 | 2.7 | 2.4 | | 2.4 | 2.0 | | 2.3 | | | 2.5 | | 2.7 | | | 78 |
| 80 | 2.2 | | | 1.9 | | | | | | 2.0 | | 2.2 | | | 80 |
| 组合 Code | 121111 | 211111 | 222100 | 122111 | 221111 | 222200 | 122220 | 222111 | 222210 | 122221 | 222211 | 122222 | 222221 | 222222 | 组合 Code |
| 倍率 n | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 1 | 倍率 n |

起重性能表

Rated lifting load table

T 53.1~79.5 m

| | 53.1 | 53.1 | 53.1 | 58.4 | 58.4 | 58.4 | 63.6 | 63.6 | 63.6 | 68.9 | 68.9 | 74.2 | 74.2 | 79.5 | |
|---------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|---------|
| | 6.5m | | | | | | | | | | | | | | |
| | 0° | | | | | | | | | | | | | | |
| 24 m | | | | | | | | | | | | | | | |
| 14 | 26.0 | 26.2 | 26.3 | | | | | | | | | | | | 14 |
| 16 | 24.5 | 24.7 | 24.8 | 24.7 | 24.6 | 24.7 | | | | | | | | | 16 |
| 18 | 23.1 | 23.2 | 23.3 | 23.2 | 23.1 | 23.6 | 23.2 | 23.4 | 23.6 | 22.6 | 22.8 | | | | 18 |
| 20 | 21.8 | 21.8 | 21.9 | 22.1 | 22.0 | 22.2 | 22.1 | 22.3 | 22.5 | 21.7 | 21.9 | 19.9 | 19.8 | | 20 |
| 22 | 20.6 | 20.6 | 20.7 | 20.9 | 21.0 | 21.2 | 21.1 | 21.2 | 21.4 | 20.8 | 21.1 | 19.4 | 18.9 | 11.7 | 22 |
| 24 | 19.5 | 19.7 | 19.8 | 20.0 | 20.1 | 20.2 | 20.3 | 20.3 | 20.3 | 19.8 | 20.1 | 18.9 | 18.0 | 11.0 | 24 |
| 26 | 18.3 | 18.6 | 18.7 | 19.0 | 19.1 | 19.2 | 19.4 | 19.5 | 19.6 | 19.0 | 19.2 | 16.3 | 17.0 | 10.4 | 26 |
| 28 | 17.2 | 17.4 | 17.5 | 17.9 | 18.0 | 18.0 | 18.6 | 18.5 | 18.8 | 18.1 | 18.4 | 15.5 | 16.1 | 9.7 | 28 |
| 30 | 16.2 | 16.4 | 16.4 | 17.1 | 17.0 | 17.2 | 17.7 | 17.8 | 17.8 | 17.3 | 17.5 | 14.8 | 15.4 | 9.1 | 30 |
| 32 | 15.4 | 15.5 | 15.6 | 16.1 | 16.3 | 16.2 | 16.8 | 16.8 | 17.0 | 16.6 | 16.8 | 14.1 | 14.6 | 8.4 | 32 |
| 34 | 14.6 | 14.5 | 14.8 | 15.3 | 15.5 | 15.4 | 16.0 | 16.0 | 16.2 | 15.9 | 16.1 | 13.5 | 13.9 | 7.9 | 34 |
| 36 | 13.9 | 13.8 | 14.0 | 14.5 | 14.7 | 14.6 | 15.3 | 15.3 | 15.4 | 15.3 | 15.4 | 12.7 | 13.3 | 7.5 | 36 |
| 38 | 13.3 | 13.2 | 13.3 | 13.9 | 13.9 | 14.0 | 14.6 | 14.6 | 14.6 | 14.6 | 14.6 | 12.2 | 12.7 | 7.1 | 38 |
| 40 | 12.7 | 12.6 | 12.7 | 13.3 | 13.3 | 13.4 | 13.9 | 14.0 | 14.0 | 13.8 | 13.9 | 11.7 | 12.2 | 6.8 | 40 |
| 42 | 12.1 | 12.1 | 12.1 | 12.7 | 12.9 | 12.8 | 13.4 | 13.5 | 13.5 | 13.2 | 13.2 | 11.2 | 11.7 | 6.5 | 42 |
| 44 | 11.5 | 11.6 | 11.7 | 12.3 | 12.3 | 12.2 | 12.9 | 12.9 | 12.9 | 12.4 | 12.5 | 10.8 | 11.2 | 6.1 | 44 |
| 46 | 11.1 | 11.1 | 11.1 | 11.7 | 11.8 | 11.8 | 12.4 | 12.4 | 12.4 | 11.8 | 11.8 | 10.3 | 10.8 | 5.8 | 46 |
| 48 | 10.9 | 10.9 | 10.9 | 11.3 | 11.3 | 11.4 | 11.9 | 12.0 | 12.0 | 11.3 | 11.3 | 9.8 | 10.1 | 5.5 | 48 |
| 50 | 10.6 | 10.6 | 10.6 | 10.9 | 10.9 | 11.0 | 11.5 | 11.6 | 11.2 | 9.5 | 8.8 | 9.5 | 9.7 | 5.2 | 50 |
| 52 | 10.2 | 10.2 | 10.3 | 10.8 | 10.8 | 10.3 | 11.1 | 10.4 | 10.4 | 9.0 | 8.3 | 9.5 | 9.0 | 5.0 | 52 |
| 54 | 9.9 | 9.9 | 9.2 | 10.4 | 9.6 | 9.2 | 10.3 | 9.6 | 9.5 | 8.5 | 7.8 | 8.9 | 8.3 | 4.8 | 54 |
| 56 | 9.6 | 9.4 | 8.1 | 9.5 | 8.8 | 8.2 | 9.3 | 8.8 | 8.5 | 8.1 | 7.4 | 8.2 | 7.5 | 4.5 | 56 |
| 58 | 8.7 | 8.5 | 7.2 | 8.5 | 8.0 | 7.3 | 8.4 | 7.9 | 7.5 | 7.7 | 7.0 | 8.2 | 7.5 | 4.1 | 58 |
| 60 | 7.9 | 7.6 | 6.3 | 7.7 | 7.2 | 6.4 | 7.5 | 7.0 | 6.7 | 7.4 | 6.6 | 7.5 | 6.8 | 3.7 | 60 |
| 62 | 7.0 | 6.8 | 5.5 | 6.8 | 6.3 | 5.6 | 6.7 | 6.2 | 5.9 | 7.0 | 6.2 | 6.8 | 6.0 | 3.4 | 62 |
| 64 | 6.3 | 6.0 | 4.8 | 6.1 | 5.6 | 4.9 | 5.9 | 5.4 | 5.1 | 6.2 | 5.4 | 6.1 | 5.3 | 3.0 | 64 |
| 66 | 5.6 | 5.3 | 4.0 | 5.4 | 4.9 | 4.1 | 5.2 | 4.7 | 4.4 | 5.5 | 4.7 | 5.3 | 4.5 | 2.9 | 66 |
| 68 | 4.9 | 4.6 | 3.4 | 4.7 | 4.2 | 3.5 | 4.6 | 4.0 | 3.7 | 4.9 | 4.1 | 5.1 | 4.2 | 2.6 | 68 |
| 70 | 4.2 | 4.0 | 2.7 | 4.1 | 3.6 | 2.8 | 3.9 | 3.4 | 3.1 | 4.2 | 3.4 | 4.5 | 3.6 | 2.3 | 70 |
| 72 | 3.6 | 3.4 | 2.1 | 3.5 | 3.0 | 2.2 | 3.3 | 2.8 | 2.5 | 3.6 | 2.9 | 3.9 | 3.0 | 2.2 | 72 |
| 74 | 3.1 | 2.8 | | 2.9 | 2.4 | | 2.8 | 2.3 | 2.0 | 3.1 | 2.3 | 3.3 | 2.5 | 1.9 | 74 |
| 76 | 2.5 | 2.2 | | 2.4 | | | 2.3 | | | 2.6 | | 2.8 | 2.0 | 1.8 | 76 |
| 78 | | | | | | | | | | 2.1 | | 2.3 | | | 78 |
| 组合 Code | 121111 | 211111 | 222100 | 122111 | 221111 | 222200 | 122220 | 222111 | 222210 | 122221 | 222211 | 122222 | 222221 | 222222 | 组合 Code |
| 倍率 n | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 1 | 倍率 n |

起重性能表

Rated lifting load table

T 53.1~79.5 m

| | 53.1 | 53.1 | 53.1 | 58.4 | 58.4 | 58.4 | 63.6 | 63.6 | 63.6 | 68.9 | 68.9 | 74.2 | 74.2 | 79.5 | |
|---------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|---------|
| | 6.5m | | | | | | | | | | | | | | |
| | 0° | | | | | | | | | | | | | | |
| 18 m | | | | | | | | | | | | | | | |
| 12 | 38.2 | 37.9 | 38.1 | | | | | | | | | | | | 12 |
| 14 | 35.1 | 35.0 | 35.6 | 35.5 | 35.3 | 35.6 | | | | | | | | | 14 |
| 16 | 32.3 | 32.2 | 32.7 | 33.1 | 32.8 | 33.2 | 31.5 | 33.8 | 34.0 | | | | | | 16 |
| 18 | 29.8 | 29.8 | 30.2 | 29.9 | 29.7 | 29.9 | 30.0 | 30.5 | 31.0 | 26.3 | 26.8 | 24.2 | 25.5 | | 18 |
| 20 | 27.8 | 27.8 | 27.8 | 28.3 | 28.3 | 28.4 | 28.5 | 28.4 | 28.9 | 24.8 | 25.3 | 22.9 | 24.3 | 14.5 | 20 |
| 22 | 25.9 | 25.8 | 26.0 | 26.8 | 27.1 | 27.2 | 26.9 | 26.9 | 27.3 | 23.7 | 24.3 | 21.8 | 23.1 | 13.9 | 22 |
| 24 | 24.2 | 24.2 | 24.4 | 25.3 | 25.3 | 25.6 | 25.3 | 25.3 | 25.5 | 22.6 | 23.0 | 20.5 | 21.8 | 13.2 | 24 |
| 26 | 22.6 | 22.6 | 22.8 | 23.7 | 23.9 | 24.0 | 23.9 | 23.9 | 23.9 | 21.6 | 22.0 | 19.4 | 20.6 | 12.6 | 26 |
| 28 | 21.6 | 21.7 | 21.8 | 22.3 | 22.6 | 22.5 | 22.7 | 22.7 | 22.6 | 20.5 | 20.9 | 18.3 | 19.4 | 11.9 | 28 |
| 30 | 20.7 | 20.8 | 20.8 | 21.5 | 21.6 | 21.5 | 21.4 | 21.4 | 21.1 | 19.4 | 19.7 | 17.1 | 18.3 | 11.3 | 30 |
| 32 | 19.6 | 19.6 | 19.9 | 20.9 | 20.8 | 20.9 | 20.0 | 20.1 | 20.0 | 18.3 | 18.7 | 16.7 | 17.5 | 10.7 | 32 |
| 34 | 18.7 | 18.7 | 18.8 | 19.5 | 19.5 | 19.5 | 18.9 | 18.9 | 18.9 | 17.0 | 17.7 | 15.9 | 16.6 | 10.1 | 34 |
| 36 | 17.9 | 17.9 | 17.9 | 18.4 | 18.5 | 18.6 | 17.7 | 17.7 | 17.8 | 16.3 | 16.7 | 15.0 | 15.6 | 9.6 | 36 |
| 38 | 17.1 | 17.1 | 17.1 | 17.6 | 17.6 | 17.6 | 17.3 | 17.3 | 16.9 | 15.4 | 15.9 | 14.2 | 14.8 | 9.0 | 38 |
| 40 | 16.2 | 16.3 | 16.3 | 15.0 | 15.0 | 14.6 | 14.6 | 14.6 | 14.0 | 13.1 | 13.1 | 13.4 | 13.9 | 8.4 | 40 |
| 42 | 15.4 | 15.5 | 15.2 | 14.8 | 14.4 | 13.7 | 13.2 | 13.2 | 13.2 | 12.8 | 12.3 | 12.6 | 13.1 | 8.0 | 42 |
| 44 | 14.9 | 15.0 | 14.4 | 13.6 | 12.9 | 12.9 | 13.1 | 12.4 | 12.4 | 12.2 | 11.6 | 12.5 | 12.3 | 7.6 | 44 |
| 46 | 14.4 | 14.3 | 12.8 | 13.5 | 12.9 | 12.1 | 12.5 | 12.2 | 11.7 | 11.6 | 10.9 | 12.0 | 11.6 | 7.3 | 46 |
| 48 | 13.6 | 12.8 | 11.9 | 12.2 | 12.2 | 11.4 | 11.8 | 11.1 | 11.1 | 11.0 | 10.3 | 10.9 | 10.9 | 7.0 | 48 |
| 50 | 12.0 | 12.0 | 10.4 | 11.4 | 10.7 | 9.9 | 11.2 | 10.5 | 10.4 | 10.4 | 9.7 | 10.4 | 9.8 | 6.7 | 50 |
| 52 | 11.1 | 10.8 | 9.5 | 10.4 | 9.9 | 9.1 | 10.1 | 10.0 | 9.6 | 9.7 | 9.0 | 9.7 | 9.0 | 6.4 | 52 |
| 54 | 10.0 | 9.7 | 8.4 | 9.7 | 9.2 | 8.4 | 9.6 | 9.2 | 8.8 | 9.0 | 8.2 | 9.0 | 8.3 | 6.2 | 54 |
| 56 | 9.0 | 8.7 | 7.3 | 8.8 | 8.3 | 7.5 | 8.8 | 8.2 | 7.9 | 8.3 | 7.5 | 8.3 | 7.5 | 5.9 | 56 |
| 58 | 8.1 | 7.7 | 6.4 | 7.9 | 7.4 | 6.6 | 7.8 | 7.3 | 6.9 | 7.5 | 6.7 | 7.6 | 6.8 | 5.7 | 58 |
| 60 | 7.2 | 6.9 | 5.5 | 7.0 | 6.5 | 5.7 | 7.0 | 6.4 | 6.1 | 6.8 | 6.0 | 6.8 | 6.0 | 5.5 | 60 |
| 62 | 6.4 | 6.1 | 4.7 | 6.2 | 5.7 | 4.9 | 6.2 | 5.6 | 5.3 | 6.0 | 5.2 | 6.9 | 5.9 | 5.2 | 62 |
| 64 | 5.6 | 5.3 | 4.0 | 5.5 | 4.9 | 4.2 | 5.4 | 4.8 | 4.5 | 5.8 | 4.9 | 6.1 | 5.2 | 4.6 | 64 |
| 66 | 4.9 | 4.6 | 3.2 | 4.7 | 4.2 | 3.4 | 4.7 | 4.1 | 3.8 | 5.1 | 4.2 | 5.4 | 4.5 | 4.0 | 66 |
| 68 | 4.2 | 3.9 | 2.6 | 4.1 | 3.6 | 2.8 | 4.0 | 3.5 | 3.1 | 4.4 | 3.6 | 4.7 | 3.8 | 3.8 | 68 |
| 70 | 3.5 | 3.2 | | 3.4 | 2.9 | 2.1 | 3.4 | 2.8 | 2.5 | 3.8 | 2.9 | 4.1 | 3.2 | 3.2 | 70 |
| 72 | | | | 2.8 | 2.3 | | 2.8 | 2.2 | | | 3.2 | 2.4 | 3.5 | 2.6 | 72 |
| 74 | | | | 2.3 | | | 2.2 | | | | 2.6 | | 3.0 | 2.1 | 74 |
| 76 | | | | | | | | | | | 2.1 | | 2.4 | | 76 |
| 组合 Code | 121111 | 211111 | 222100 | 122111 | 221111 | 222200 | 122220 | 222111 | 222210 | 122221 | 222211 | 122222 | 222221 | 222222 | 组合 Code |
| 倍率 n | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 2 | 2 | 2 | 2 | 2 | 倍率 n |

起重性能表

Rated lifting load table

T 53.1~79.5 m

| 6.5m | | | | | | | | | | | | | | | |
|---------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|---------|
| 0° | | | | | | | | | | | | | | | |
| 12 m | | | | | | | | | | | | | | | |
| 12 | 51.4 | 51.7 | 52.1 | | | | | | | | | | | | 12 |
| 14 | 48.0 | 48.1 | 48.5 | 47.1 | 47.5 | 47.9 | | | | | | | | | 14 |
| 16 | 44.9 | 44.8 | 45.2 | 43.1 | 43.2 | 43.6 | 39.4 | 39.4 | 39.9 | | | | | | 16 |
| 18 | 41.0 | 41.2 | 41.5 | 39.9 | 39.7 | 40.0 | 36.1 | 36.2 | 36.8 | 38.0 | 38.0 | | | | 18 |
| 20 | 37.7 | 38.0 | 38.2 | 36.4 | 36.5 | 36.7 | 31.2 | 31.3 | 31.7 | 32.0 | 33.4 | 25.0 | 30.0 | 27.5 | 20 |
| 22 | 34.6 | 34.9 | 35.2 | 32.8 | 33.2 | 33.1 | 29.4 | 30.1 | 29.6 | 27.5 | 28.3 | 24.6 | 27.6 | 27.0 | 22 |
| 24 | 30.9 | 31.0 | 31.2 | 29.7 | 29.8 | 29.6 | 27.0 | 27.7 | 27.5 | 24.9 | 26.5 | 24.3 | 25.7 | 16.8 | 24 |
| 26 | 28.6 | 28.6 | 28.7 | 28.8 | 28.9 | 27.5 | 24.4 | 26.5 | 25.8 | 23.6 | 24.7 | 23.0 | 24.0 | 16.0 | 26 |
| 28 | 28.1 | 27.4 | 26.7 | 26.6 | 25.9 | 25.8 | 23.9 | 24.7 | 24.3 | 23.0 | 23.3 | 21.4 | 22.5 | 15.1 | 28 |
| 30 | 26.6 | 26.6 | 25.1 | 25.7 | 25.0 | 24.2 | 23.0 | 22.8 | 22.8 | 21.6 | 22.0 | 20.3 | 21.0 | 14.3 | 30 |
| 32 | 25.3 | 25.3 | 23.7 | 23.6 | 23.6 | 22.8 | 22.1 | 21.4 | 21.4 | 20.4 | 20.6 | 19.5 | 19.8 | 13.6 | 32 |
| 34 | 23.2 | 23.2 | 21.6 | 23.0 | 22.2 | 21.5 | 21.0 | 21.0 | 20.3 | 19.4 | 19.4 | 18.1 | 18.7 | 13.0 | 34 |
| 36 | 21.6 | 20.8 | 20.0 | 20.8 | 20.8 | 20.0 | 19.9 | 19.1 | 19.1 | 19.2 | 18.4 | 17.1 | 17.5 | 12.4 | 36 |
| 38 | 20.0 | 19.2 | 18.4 | 19.2 | 18.4 | 18.4 | 18.9 | 18.1 | 18.1 | 18.2 | 17.4 | 16.7 | 16.4 | 11.9 | 38 |
| 40 | 17.6 | 17.6 | 16.8 | 17.6 | 16.8 | 16.8 | 17.6 | 16.8 | 16.8 | 17.2 | 16.4 | 16.2 | 15.5 | 11.4 | 40 |
| 42 | 16.8 | 16.0 | 15.2 | 16.0 | 16.0 | 15.2 | 16.0 | 15.2 | 15.2 | 16.0 | 15.2 | 15.2 | 14.6 | 10.9 | 42 |
| 44 | 15.2 | 15.2 | 13.6 | 15.2 | 14.4 | 13.6 | 14.4 | 14.4 | 13.6 | 15.2 | 14.4 | 14.5 | 13.8 | 10.4 | 44 |
| 46 | 13.6 | 13.6 | 12.0 | 13.6 | 12.8 | 12.6 | 13.6 | 12.8 | 12.8 | 13.6 | 12.8 | 13.3 | 12.5 | 10.0 | 46 |
| 48 | 12.7 | 12.3 | 10.9 | 12.6 | 12.0 | 11.2 | 12.0 | 12.0 | 11.2 | 12.8 | 12.0 | 11.6 | 10.9 | 9.8 | 48 |
| 50 | 11.4 | 11.0 | 9.6 | 11.2 | 10.7 | 9.9 | 11.2 | 10.4 | 10.3 | 11.2 | 10.4 | 10.9 | 10.1 | 9.2 | 50 |
| 52 | 10.2 | 9.9 | 8.4 | 10.1 | 9.6 | 8.7 | 10.1 | 9.5 | 9.2 | 10.4 | 9.6 | 10.3 | 9.4 | 8.8 | 52 |
| 54 | 9.1 | 8.8 | 7.3 | 9.0 | 8.5 | 7.6 | 9.0 | 8.4 | 8.1 | 9.5 | 8.6 | 9.4 | 8.6 | 8.1 | 54 |
| 56 | 8.1 | 7.7 | 6.3 | 8.0 | 7.5 | 6.6 | 8.0 | 7.4 | 7.1 | 8.5 | 7.6 | 8.6 | 7.8 | 7.5 | 56 |
| 58 | 7.1 | 6.8 | 5.3 | 7.1 | 6.5 | 5.7 | 7.1 | 6.5 | 6.1 | 7.6 | 6.7 | 8.0 | 7.0 | 6.8 | 58 |
| 60 | 6.2 | 5.9 | 4.5 | 6.2 | 5.6 | 4.8 | 6.2 | 5.6 | 5.3 | 6.7 | 5.8 | 7.1 | 6.2 | 5.6 | 60 |
| 62 | 5.4 | 5.1 | 3.6 | 5.4 | 4.8 | 4.0 | 5.4 | 4.8 | 4.5 | 5.9 | 5.0 | 6.3 | 5.4 | 4.8 | 62 |
| 64 | 4.6 | 4.3 | 2.9 | 4.6 | 4.1 | 3.2 | 4.7 | 4.1 | 3.7 | 5.2 | 4.3 | 5.6 | 4.6 | 4.2 | 64 |
| 66 | | | | 3.9 | 3.3 | 2.5 | 4.0 | 3.4 | 3.0 | 4.5 | 3.5 | 4.9 | 3.9 | 3.6 | 66 |
| 68 | | | | 3.2 | 2.7 | | 3.3 | 2.7 | 2.3 | 3.8 | 2.9 | 4.2 | 3.2 | 3.0 | 68 |
| 70 | | | | 2.5 | 2.0 | | 2.6 | 2.1 | | 3.2 | 2.3 | 3.6 | 2.6 | 2.4 | 70 |
| 72 | | | | | | | 2.0 | | | 2.6 | | 3.0 | 2.0 | 1.9 | 72 |
| 74 | | | | | | | | | | 2.0 | | 2.4 | | | 74 |
| 组合 Code | 121111 | 211111 | 222100 | 122111 | 221111 | 222200 | 122220 | 222111 | 222210 | 122221 | 222211 | 122222 | 222221 | 222222 | 组合 Code |
| 倍率 n | 4 | 4 | 4 | 4 | 4 | 4 | 3 | 3 | 3 | 3 | 3 | 2 | 3 | 3 | 倍率 n |

起重性能表


Rated lifting load table

T 53.1~79.5 m

| m | 53.1-79.5 m | | 6.5 m | | 6 m | | 9.4×9.6 m | | 360° | | 153 t | | SA | | m |
|---------|-------------|--------|--------|--------|--------|--------|-----------|--------|--------|--------|--------|--------|--------|--------|---------|
| | 53.1 | 53.1 | 53.1 | 58.4 | 58.4 | 58.4 | 63.6 | 63.6 | 63.6 | 68.9 | 68.9 | 74.2 | 74.2 | 79.5 | |
| | 6.5m | | | | | | | | | | | | | | |
| | 0° | | | | | | | | | | | | | | |
| 6 m | | | | | | | | | | | | | | | |
| 10 | 63.0 | 64.0 | 65.0 | | | | | | | | | | | | 10 |
| 12 | 61.8 | 62.8 | 62.8 | 62.0 | 61.7 | 61.2 | | | | | | | | | 12 |
| 14 | 60.9 | 60.9 | 60.9 | 58.0 | 58.0 | 58.0 | 58.0 | 59.8 | 59.1 | | | | | | 14 |
| 16 | 57.9 | 57.9 | 57.9 | 55.0 | 55.0 | 55.0 | 52.8 | 54.8 | 53.9 | 45.0 | 47.0 | | | | 16 |
| 18 | 53.6 | 52.8 | 52.0 | 51.8 | 52.0 | 51.0 | 48.3 | 50.0 | 49.2 | 41.9 | 43.5 | 41.4 | 43.0 | | 18 |
| 20 | 48.0 | 47.2 | 46.4 | 47.2 | 46.4 | 45.6 | 44.4 | 45.6 | 44.8 | 40.2 | 41.0 | 36.6 | 38.0 | 25.0 | 20 |
| 22 | 43.2 | 42.4 | 41.6 | 42.4 | 41.6 | 40.8 | 40.6 | 41.6 | 40.8 | 37.0 | 37.9 | 34.0 | 35.0 | 23.5 | 22 |
| 24 | 38.4 | 38.4 | 37.6 | 38.4 | 37.6 | 36.8 | 37.6 | 37.6 | 36.8 | 34.3 | 35.2 | 29.8 | 30.5 | 22.6 | 24 |
| 26 | 35.2 | 35.2 | 33.6 | 34.4 | 34.4 | 32.0 | 34.4 | 33.6 | 32.0 | 31.9 | 30.7 | 27.8 | 28.3 | 21.4 | 26 |
| 28 | 30.4 | 30.4 | 28.8 | 30.4 | 29.6 | 28.8 | 29.6 | 29.6 | 28.8 | 29.5 | 28.8 | 26.1 | 26.6 | 20.3 | 28 |
| 30 | 28.0 | 27.2 | 26.4 | 27.2 | 27.2 | 26.4 | 27.2 | 26.4 | 26.4 | 27.2 | 26.4 | 24.4 | 25.0 | 19.0 | 30 |
| 32 | 25.6 | 24.8 | 24.0 | 24.8 | 24.0 | 24.0 | 24.8 | 24.0 | 24.0 | 24.8 | 24.0 | 23.6 | 23.2 | 18.1 | 32 |
| 34 | 23.2 | 22.4 | 21.6 | 22.4 | 22.4 | 21.6 | 22.4 | 21.6 | 21.6 | 22.4 | 21.6 | 22.4 | 21.6 | 17.3 | 34 |
| 36 | 20.8 | 20.8 | 19.2 | 20.8 | 20.0 | 19.2 | 20.8 | 20.0 | 19.2 | 20.8 | 20.0 | 20.8 | 20.0 | 16.4 | 36 |
| 38 | 19.2 | 18.4 | 17.6 | 19.2 | 18.4 | 17.6 | 18.4 | 18.4 | 17.6 | 19.2 | 18.4 | 19.2 | 18.4 | 15.4 | 38 |
| 40 | 17.6 | 16.8 | 16.0 | 17.6 | 16.8 | 16.0 | 16.8 | 16.8 | 16.0 | 17.6 | 16.8 | 17.6 | 16.8 | 14.7 | 40 |
| 42 | 16.0 | 15.2 | 14.3 | 16.0 | 15.2 | 14.4 | 15.2 | 15.2 | 14.4 | 16.0 | 15.2 | 16.0 | 15.2 | 13.7 | 42 |
| 44 | 14.4 | 14.2 | 12.6 | 14.4 | 13.6 | 12.8 | 14.4 | 13.6 | 13.6 | 14.4 | 13.6 | 14.4 | 13.6 | 13.0 | 44 |
| 46 | 12.8 | 12.6 | 11.0 | 12.8 | 12.4 | 11.5 | 12.8 | 12.5 | 12.0 | 13.6 | 12.8 | 13.6 | 12.8 | 11.8 | 46 |
| 48 | 11.6 | 11.2 | 9.6 | 11.7 | 11.0 | 10.1 | 11.8 | 11.1 | 10.7 | 12.0 | 11.2 | 12.8 | 11.2 | 10.4 | 48 |
| 50 | 10.3 | 9.9 | 8.3 | 10.4 | 9.7 | 8.8 | 10.4 | 9.8 | 9.4 | 11.1 | 10.1 | 11.2 | 10.4 | 9.9 | 50 |
| 52 | 9.1 | 8.7 | 7.1 | 9.2 | 8.6 | 7.6 | 9.3 | 8.7 | 8.3 | 9.9 | 8.9 | 10.4 | 9.4 | 8.9 | 52 |
| 54 | 8.0 | 7.6 | 6.0 | 8.1 | 7.5 | 6.5 | 8.2 | 7.6 | 7.2 | 8.8 | 7.9 | 9.4 | 8.3 | 8.4 | 54 |
| 56 | 7.0 | 6.6 | 5.0 | 7.1 | 6.5 | 5.5 | 7.2 | 6.6 | 6.2 | 7.8 | 6.9 | 8.4 | 7.3 | 7.7 | 56 |
| 58 | 6.0 | 5.7 | 4.1 | 6.1 | 5.5 | 4.6 | 6.3 | 5.6 | 5.2 | 6.9 | 5.9 | 7.4 | 6.4 | 6.9 | 58 |
| 60 | 4.3 | 4.1 | 2.4 | 5.3 | 4.6 | 3.7 | 5.4 | 4.8 | 4.4 | 6.0 | 5.1 | 6.6 | 5.5 | 6.0 | 60 |
| 62 | | | | 4.4 | 3.8 | 2.9 | 4.6 | 3.9 | 3.6 | 5.2 | 4.3 | 5.8 | 4.7 | 5.2 | 62 |
| 64 | | | | 3.6 | 3.0 | 2.1 | 3.8 | 3.2 | 2.8 | 4.5 | 3.5 | 5.0 | 4.0 | 4.5 | 64 |
| 66 | | | | | | | 3.1 | 2.5 | 2.1 | 3.8 | 2.8 | 4.3 | 3.2 | 3.8 | 66 |
| 68 | | | | | | | 2.4 | | | 3.1 | 2.1 | 3.6 | 2.6 | 3.1 | 68 |
| 70 | | | | | | | | | | 2.5 | | 3.0 | 2.0 | 2.5 | 70 |
| 72 | | | | | | | | | | | | 2.4 | | 1.9 | 72 |
| 组合 Code | 121111 | 211111 | 222100 | 122111 | 221111 | 222200 | 122220 | 222111 | 222210 | 122221 | 222211 | 122222 | 222221 | 222222 | 组合 Code |
| 倍率 n | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 4 | 4 | 4 | 4 | 2 | 倍率 n |

起升高度曲线图
Lifting height chart


主臂+超起+副臂
Boom+ Super lifting device + Jib

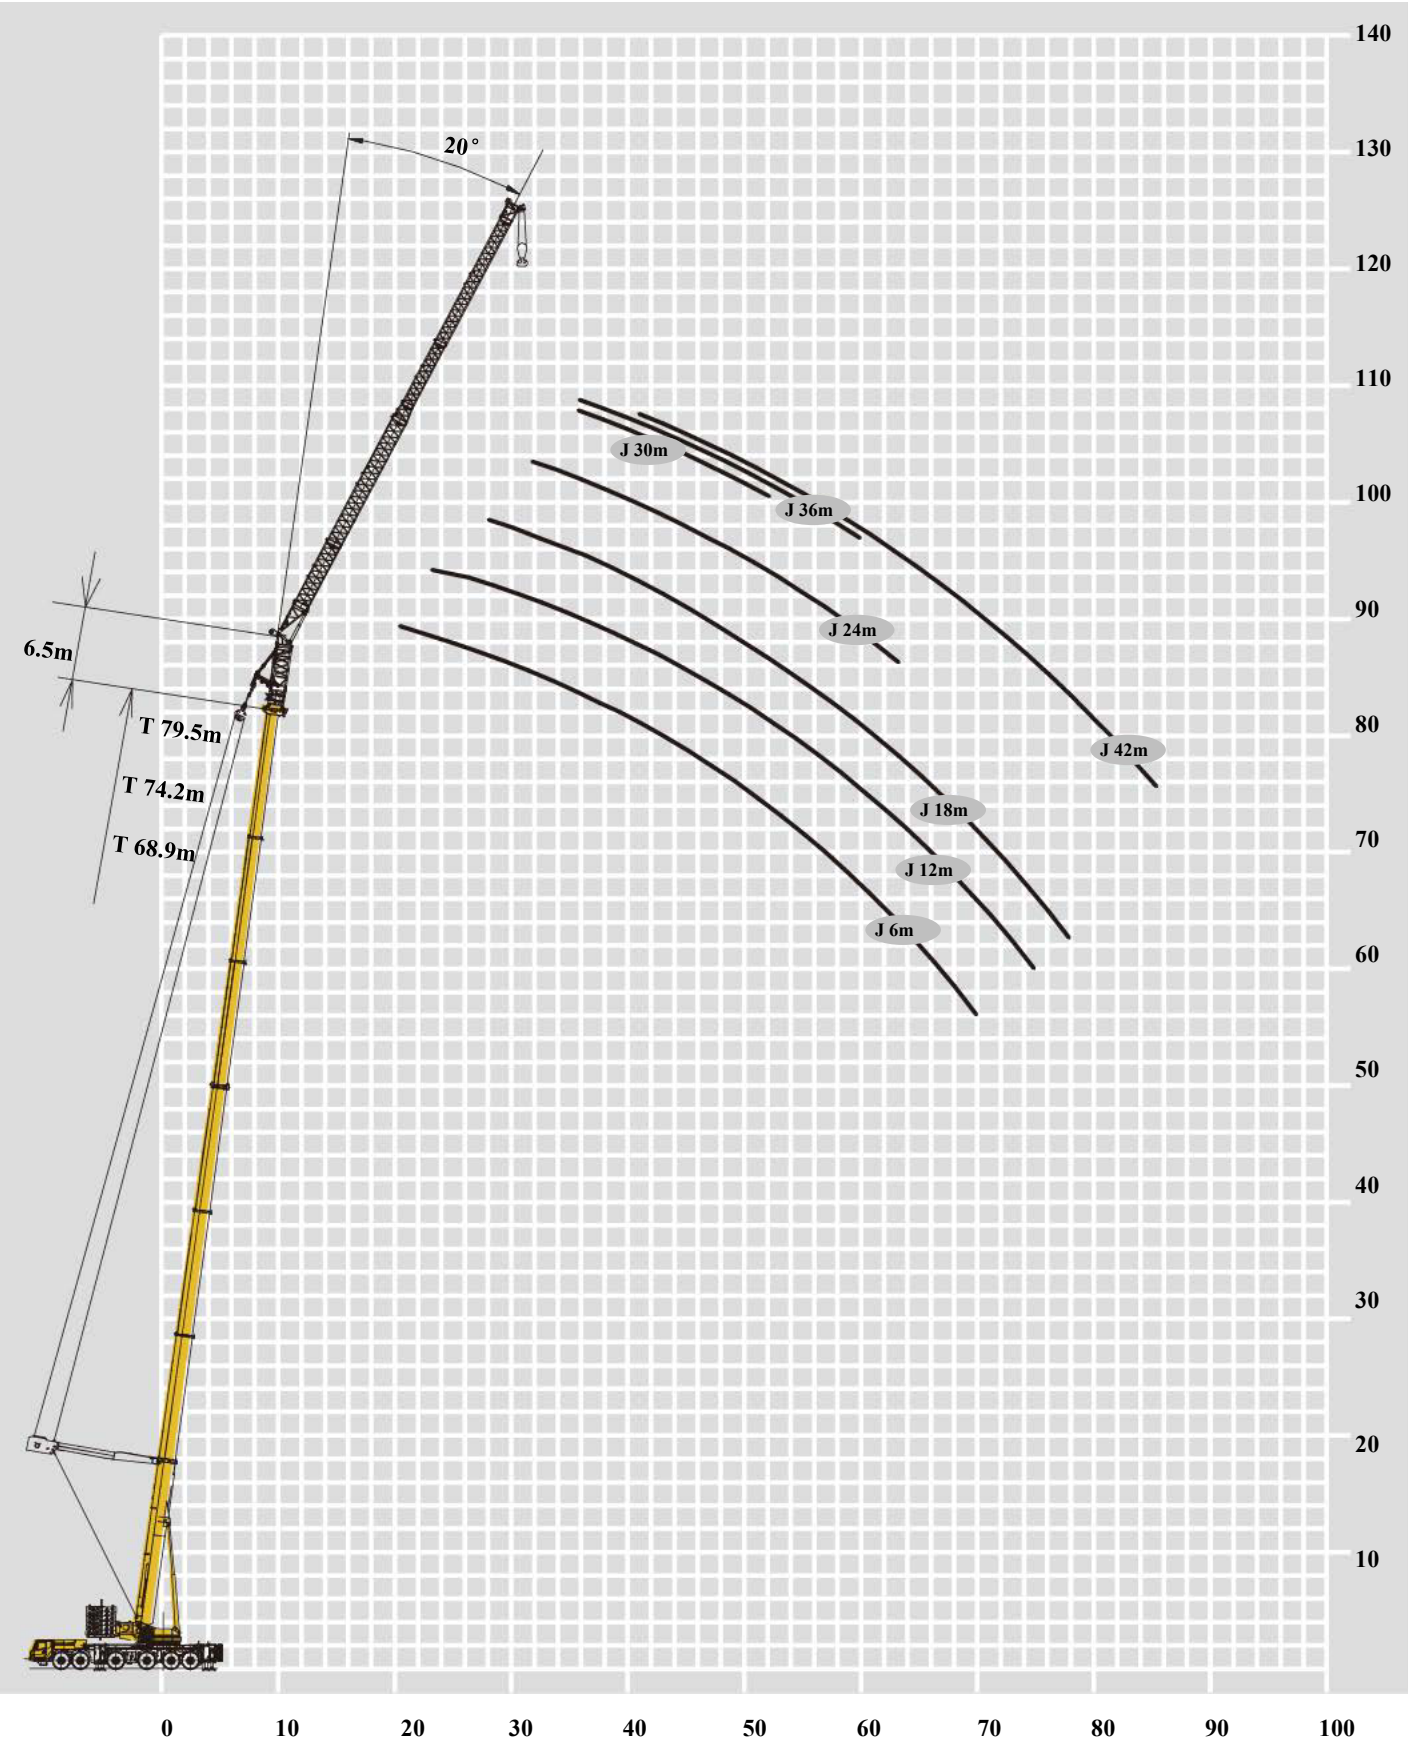

起重性能表

Rated lifting load table

T 53.1~68.9 m



| | m | | | | | | | | | | | | |
|---------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|---------|--|
| | 53.1 | 53.1 | 53.1 | 58.4 | 58.4 | 58.4 | 63.6 | 63.6 | 63.6 | 68.9 | 68.9 | m | |
| | 6.5m | | | | | | | | | | | | |
| | 20° | | | | | | | | | | | | |
| 42 m | | | | | | | | | | | | | |
| 32 | 5 | 5.1 | 5.1 | | | | | | | | | 32 | |
| 34 | 4.8 | 4.9 | 5.0 | 4.9 | 4.9 | 4.9 | | | | | | 34 | |
| 36 | 4.6 | 4.7 | 4.8 | 4.7 | 4.7 | 4.7 | 4.8 | 4.9 | 4.9 | | | 36 | |
| 38 | 4.5 | 4.5 | 4.6 | 4.5 | 4.5 | 4.6 | 4.7 | 4.7 | 4.7 | | | 38 | |
| 40 | 4.3 | 4.3 | 4.4 | 4.4 | 4.4 | 4.4 | 4.5 | 4.5 | 4.5 | 4.6 | 4.5 | 40 | |
| 42 | 4.1 | 4.1 | 4.2 | 4.2 | 4.2 | 4.3 | 4.3 | 4.3 | 4.3 | 4.4 | 4.4 | 42 | |
| 44 | 4.0 | 4.0 | 4.0 | 4.1 | 4.1 | 4.1 | 4.2 | 4.2 | 4.2 | 4.3 | 4.2 | 44 | |
| 46 | 3.9 | 3.8 | 3.8 | 4.0 | 3.9 | 4.0 | 4.0 | 4.0 | 4.0 | 4.1 | 4.2 | 46 | |
| 48 | 3.7 | 3.7 | 3.7 | 3.8 | 3.8 | 3.9 | 3.9 | 3.9 | 3.9 | 4.0 | 4.0 | 48 | |
| 50 | 3.6 | 3.6 | 3.6 | 3.7 | 3.7 | 3.7 | 3.8 | 3.8 | 3.8 | 3.9 | 3.8 | 50 | |
| 52 | 3.5 | 3.5 | 3.5 | 3.6 | 3.5 | 3.6 | 3.7 | 3.7 | 3.7 | 3.8 | 3.7 | 52 | |
| 54 | 3.4 | 3.4 | 3.4 | 3.5 | 3.4 | 3.5 | 3.6 | 3.6 | 3.6 | 3.7 | 3.6 | 54 | |
| 56 | 3.3 | 3.3 | 3.2 | 3.3 | 3.3 | 3.4 | 3.5 | 3.5 | 3.5 | 3.6 | 3.5 | 56 | |
| 58 | 3.2 | 3.2 | 3.1 | 3.2 | 3.2 | 3.2 | 3.4 | 3.4 | 3.4 | 3.5 | 3.4 | 58 | |
| 60 | 3.1 | 3.1 | 3.0 | 3.1 | 3.1 | 3.1 | 3.3 | 3.3 | 3.3 | 3.4 | 3.3 | 60 | |
| 62 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.2 | 3.2 | 3.2 | 3.3 | 3.3 | 62 | |
| 64 | 2.9 | 2.9 | 2.9 | 3.0 | 3.0 | 3.0 | 3.1 | 3.1 | 3.1 | 3.2 | 3.2 | 64 | |
| 66 | 2.8 | 2.8 | 2.8 | 2.9 | 2.9 | 2.9 | 3.0 | 3.0 | 3.0 | 3.2 | 3.1 | 66 | |
| 68 | 2.7 | 2.7 | 2.7 | 2.8 | 2.8 | 2.8 | 3.0 | 2.9 | 2.9 | 3.1 | 3.0 | 68 | |
| 70 | 2.7 | 2.6 | 2.6 | 2.7 | 2.7 | 2.7 | 2.9 | 2.9 | 2.9 | 3.0 | 3.0 | 70 | |
| 72 | 2.6 | 2.6 | 2.6 | 2.7 | 2.7 | 2.7 | 2.8 | 2.8 | 2.8 | 3.0 | 2.9 | 72 | |
| 74 | 2.5 | 2.5 | 2.5 | 2.6 | 2.6 | 2.6 | 2.8 | 2.7 | 2.7 | 2.9 | 2.8 | 74 | |
| 76 | 2.4 | 2.4 | 2.4 | 2.5 | 2.5 | 2.5 | 2.7 | 2.7 | 2.7 | 2.8 | 2.8 | 76 | |
| 78 | 2.4 | 2.4 | 2.4 | 2.5 | 2.5 | 2.5 | 2.6 | 2.6 | 2.6 | 2.7 | 2.7 | 78 | |
| 80 | 2.3 | 2.3 | 2.3 | 2.4 | 2.4 | 2.4 | 2.6 | 2.6 | 2.6 | 2.7 | 2.7 | 80 | |
| 82 | 2.3 | 2.2 | 2.3 | 2.4 | 2.4 | 2.4 | 2.5 | 2.5 | 2.5 | 2.6 | 2.6 | 82 | |
| 84 | 2.2 | 2.2 | 2.2 | 2.3 | 2.3 | 2.2 | 2.4 | 2.4 | 2.4 | 2.6 | 2.6 | 84 | |
| 86 | 2.2 | 2.2 | | 2.3 | 2.3 | | 2.4 | 2.1 | | 2.5 | 2.1 | 86 | |
| 88 | 2.1 | 2.1 | | 2.1 | | | 2.0 | | | 2.2 | | 88 | |
| 组合 Code | 121111 | 211111 | 222100 | 122111 | 221111 | 222200 | 122220 | 222111 | 222210 | 122221 | 222211 | 组合 Code | |
| 倍率 n | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 倍率 n | |

起重性能表

Rated lifting load table

T 53.1~74.2 m

| | | 53.1-74.2 m | | 6.5 m | | 36 m | | 9.4×9.6 m | | 360° | | 153 t | | | | |
|---------|--------|-------------|--------|--------|--------|--------|--------|-----------|--------|--------|--------|--------|--------|---------|----|--|
| | | 53.1 | 53.1 | 53.1 | 58.4 | 58.4 | 58.4 | 63.6 | 63.6 | 63.6 | 68.9 | 68.9 | 74.2 | 74.2 | | |
| | | 6.5m | | | | | | | | | | | | | | |
| | | 20° | | | | | | | | | | | | | | |
| | | 36 m | | | | | | | | | | | | | | |
| 30 | 6.7 | 6.7 | 6.8 | 6.8 | 6.8 | 6.8 | 6.8 | | | | | | | | 30 | |
| 32 | 6.4 | 6.4 | 6.5 | 6.6 | 6.6 | 6.6 | 6.6 | 6.7 | 6.6 | 6.6 | | | | | 32 | |
| 34 | 6.2 | 6.2 | 6.3 | 6.3 | 6.3 | 6.3 | 6.3 | 6.4 | 6.4 | 6.5 | 6.5 | 6.4 | | | 34 | |
| 36 | 6.0 | 6.0 | 6.0 | 6.1 | 6.1 | 6.1 | 6.1 | 6.2 | 6.1 | 6.2 | 6.3 | 6.2 | 6.4 | 6.4 | 36 | |
| 38 | 5.8 | 5.8 | 5.8 | 5.9 | 5.8 | 5.9 | 5.9 | 6.0 | 5.9 | 6.0 | 6.1 | 6.0 | 6.3 | 6.2 | 38 | |
| 40 | 5.6 | 5.6 | 5.6 | 5.7 | 5.6 | 5.7 | 5.7 | 5.8 | 5.7 | 5.8 | 5.9 | 5.8 | 6.1 | 6.0 | 40 | |
| 42 | 5.4 | 5.3 | 5.4 | 5.5 | 5.4 | 5.5 | 5.5 | 5.6 | 5.6 | 5.6 | 5.7 | 5.7 | 5.9 | 5.8 | 42 | |
| 44 | 5.2 | 5.1 | 5.2 | 5.3 | 5.3 | 5.3 | 5.3 | 5.4 | 5.4 | 5.5 | 5.5 | 5.6 | 5.2 | 5.2 | 44 | |
| 46 | 5.0 | 5.0 | 5.0 | 5.1 | 5.1 | 5.1 | 5.1 | 5.3 | 5.3 | 5.3 | 5.3 | 5.4 | 4.6 | 4.5 | 46 | |
| 48 | 4.9 | 4.8 | 4.9 | 5.0 | 4.9 | 5.0 | 5.0 | 5.1 | 5.1 | 5.2 | 5.2 | 5.3 | 4.1 | 4.1 | 48 | |
| 50 | 4.7 | 4.7 | 4.7 | 4.8 | 4.8 | 4.8 | 4.8 | 5.0 | 5.0 | 5.0 | 5.1 | 5.1 | 3.7 | 3.6 | 50 | |
| 52 | 4.6 | 4.6 | 4.6 | 4.7 | 4.7 | 4.7 | 4.7 | 4.9 | 4.9 | 4.9 | 4.9 | 5.0 | 3.2 | 3.2 | 52 | |
| 54 | 4.4 | 4.4 | 4.5 | 4.6 | 4.5 | 4.6 | 4.6 | 4.7 | 4.7 | 4.7 | 4.9 | 4.9 | 2.8 | 2.7 | 54 | |
| 56 | 4.3 | 4.3 | 4.3 | 4.4 | 4.4 | 4.4 | 4.4 | 4.6 | 4.6 | 4.6 | 4.7 | 4.8 | 2.2 | 2.2 | 56 | |
| 58 | 4.2 | 4.2 | 4.2 | 4.3 | 4.3 | 4.3 | 4.3 | 4.5 | 4.5 | 4.5 | 4.6 | 4.6 | 2.0 | 2.0 | 58 | |
| 60 | 4.1 | 4.1 | 4.1 | 4.2 | 4.2 | 4.2 | 4.2 | 4.4 | 4.4 | 4.4 | 4.5 | 4.5 | 1.9 | | 60 | |
| 62 | 4.0 | 4.0 | 4.0 | 4.1 | 4.1 | 4.1 | 4.1 | 4.3 | 4.2 | 4.3 | 4.4 | 4.4 | | | 62 | |
| 64 | 3.9 | 3.9 | 3.9 | 4.0 | 4.0 | 4.0 | 4.0 | 4.2 | 4.1 | 4.2 | 4.3 | 4.4 | | | 64 | |
| 66 | 3.8 | 3.7 | 3.8 | 3.9 | 3.9 | 3.9 | 3.9 | 4.1 | 4.0 | 4.1 | 4.3 | 4.3 | | | 66 | |
| 68 | 3.6 | 3.7 | 3.7 | 3.8 | 3.8 | 3.8 | 3.8 | 4.0 | 4.0 | 4.0 | 4.2 | 4.2 | | | 68 | |
| 70 | 3.6 | 3.6 | 3.6 | 3.8 | 3.8 | 3.8 | 3.8 | 3.9 | 3.9 | 3.9 | 4.1 | 4.1 | | | 70 | |
| 72 | 3.5 | 3.5 | 3.5 | 3.7 | 3.7 | 3.7 | 3.7 | 3.8 | 3.8 | 3.8 | 4.0 | 3.9 | | | 72 | |
| 74 | 3.4 | 3.4 | 3.4 | 3.6 | 3.6 | 3.6 | 3.6 | 3.7 | 3.7 | 3.7 | 3.9 | 3.9 | | | 74 | |
| 76 | 3.4 | 3.4 | 3.4 | 3.5 | 3.5 | 3.5 | 3.5 | 3.7 | 3.7 | 3.7 | 3.9 | 3.8 | | | 76 | |
| 78 | 3.3 | 3.3 | 3.0 | 3.5 | 3.5 | 3.1 | 3.6 | 3.6 | 3.3 | 3.7 | 3.6 | | | | 78 | |
| 80 | 3.3 | 3.3 | 2.4 | 3.4 | 3.1 | 2.5 | 3.4 | 3.0 | 2.8 | 3.7 | 3.0 | | | | 80 | |
| 82 | 3.1 | 2.9 | | 3.0 | 2.6 | 2.0 | 2.9 | 2.5 | 2.2 | 3.1 | 2.5 | | | | 82 | |
| 84 | 2.5 | 2.3 | | 2.5 | 2.1 | | 2.4 | 2.0 | | 2.6 | 2.0 | | | | 84 | |
| 86 | 2.0 | | | | | | | | | 2.2 | | | | | 86 | |
| 组合 Code | 121111 | 211111 | 222100 | 122111 | 221111 | 222200 | 122220 | 222111 | 222210 | 122221 | 222211 | 122222 | 222221 | 组合 Code | | |
| 倍率 n | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 倍率 n | | |

起重性能表

Rated lifting load table

T 53.1~79.5 m

| | 53.1 | 53.1 | 53.1 | 58.4 | 58.4 | 58.4 | 63.6 | 63.6 | 63.6 | 68.9 | 68.9 | 74.2 | 74.2 | 79.5 | |
|---------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|---------|
| | 6.5m | | | | | | | | | | | | | | |
| | 20° | | | | | | | | | | | | | | |
| 30 m | | | | | | | | | | | | | | | |
| 26 | 8.6 | 8.6 | 8.6 | | | | | | | | | | | | 26 |
| 28 | 8.2 | 8.2 | 8.2 | 8.3 | 8.4 | 8.4 | 8.5 | 8.5 | 8.5 | | | | | | 28 |
| 30 | 7.9 | 7.9 | 8.0 | 8.1 | 8.1 | 8.0 | 8.2 | 8.2 | 8.2 | | | | | | 30 |
| 32 | 7.6 | 7.6 | 7.7 | 7.7 | 7.8 | 7.8 | 7.9 | 7.9 | 8.0 | 8.0 | 8.2 | | | | 32 |
| 34 | 7.3 | 7.3 | 7.4 | 7.5 | 7.6 | 7.5 | 7.6 | 7.7 | 7.7 | 7.8 | 7.8 | 8.0 | 8.1 | | 34 |
| 36 | 7.1 | 7.1 | 7.2 | 7.3 | 7.2 | 7.3 | 7.4 | 7.4 | 7.5 | 7.6 | 7.6 | 7.8 | 7.9 | 5.1 | 36 |
| 38 | 6.9 | 6.9 | 7.0 | 7.1 | 7.0 | 7.0 | 7.2 | 7.2 | 7.2 | 7.4 | 7.4 | 7.6 | 7.5 | 4.7 | 38 |
| 40 | 6.6 | 6.7 | 6.7 | 6.8 | 6.8 | 6.8 | 7.0 | 7.0 | 7.0 | 7.1 | 7.2 | 7.4 | 7.3 | 4.3 | 40 |
| 42 | 6.4 | 6.4 | 6.5 | 6.6 | 6.6 | 6.6 | 6.8 | 6.8 | 6.8 | 6.9 | 7.0 | 7.2 | 7.1 | 3.9 | 42 |
| 44 | 6.2 | 6.2 | 6.3 | 6.4 | 6.4 | 6.4 | 6.6 | 6.6 | 6.6 | 6.7 | 6.8 | 6.9 | 6.8 | 3.5 | 44 |
| 46 | 6.0 | 6.0 | 6.1 | 6.2 | 6.2 | 6.2 | 6.4 | 6.4 | 6.4 | 6.5 | 6.6 | 6.7 | 6.6 | 3.0 | 46 |
| 48 | 5.9 | 5.9 | 5.9 | 6.1 | 6.0 | 6.0 | 6.2 | 6.3 | 6.2 | 6.5 | 6.5 | 6.4 | 6.4 | 2.6 | 48 |
| 50 | 5.7 | 5.7 | 5.8 | 5.9 | 5.9 | 5.9 | 6.1 | 6.1 | 6.1 | 6.3 | 6.3 | 6.2 | 6.2 | 2.2 | 50 |
| 52 | 5.6 | 5.6 | 5.6 | 5.7 | 5.7 | 5.7 | 5.9 | 6.0 | 6.0 | 6.1 | 6.2 | 6.0 | 6.0 | 1.8 | 52 |
| 54 | 5.4 | 5.4 | 5.4 | 5.6 | 5.6 | 5.6 | 5.8 | 5.8 | 5.8 | 6.0 | 6.0 | 5.9 | 5.8 | | 54 |
| 56 | 5.3 | 5.3 | 5.3 | 5.5 | 5.5 | 5.5 | 5.7 | 5.7 | 5.7 | 5.9 | 5.9 | 5.6 | 5.6 | | 56 |
| 58 | 5.2 | 5.2 | 5.2 | 5.4 | 5.3 | 5.4 | 5.6 | 5.6 | 5.6 | 5.8 | 5.8 | 5.4 | 5.3 | | 58 |
| 60 | 5.1 | 5.1 | 5.1 | 5.2 | 5.2 | 5.2 | 5.4 | 5.5 | 5.5 | 5.6 | 5.7 | 4.9 | 4.9 | | 60 |
| 62 | 5.0 | 5.0 | 5.0 | 5.2 | 5.1 | 5.1 | 5.3 | 5.3 | 5.3 | 5.6 | 5.5 | 4.6 | 4.5 | | 62 |
| 64 | 4.9 | 4.9 | 4.9 | 5.0 | 5.0 | 5.0 | 5.2 | 5.2 | 5.2 | 5.4 | 5.4 | 4.5 | 4.4 | | 64 |
| 66 | 4.8 | 4.8 | 4.8 | 4.9 | 4.9 | 4.9 | 5.1 | 5.1 | 5.1 | 5.4 | 5.3 | 4.1 | 4.0 | | 66 |
| 68 | 4.7 | 4.7 | 4.7 | 4.8 | 4.8 | 4.8 | 5.1 | 5.0 | 5.0 | 5.2 | 5.2 | 3.7 | 3.6 | | 68 |
| 70 | 4.6 | 4.6 | 4.6 | 4.7 | 4.8 | 4.8 | 5.0 | 4.9 | 4.9 | 5.1 | 5.1 | 3.2 | 3.1 | | 70 |
| 72 | 4.5 | 4.5 | 4.0 | 4.7 | 4.7 | 4.2 | 4.8 | 4.7 | 4.5 | 5.0 | 4.8 | 3.1 | 3.0 | | 72 |
| 74 | 4.4 | 4.4 | 3.4 | 4.6 | 4.2 | 3.5 | 4.5 | 4.1 | 3.8 | 4.8 | 4.1 | 3.1 | 2.7 | | 74 |
| 76 | 4.0 | 3.8 | 2.7 | 4.0 | 3.5 | 2.9 | 3.9 | 3.5 | 3.2 | 4.2 | 3.5 | 2.7 | 2.3 | | 76 |
| 78 | 3.4 | 3.2 | 2.1 | 3.4 | 2.9 | 2.3 | 3.3 | 2.9 | 2.6 | 3.6 | 3.0 | 2.7 | 2.2 | | 78 |
| 80 | 2.8 | 2.6 | | 2.8 | 2.4 | | 2.8 | 2.3 | 2.0 | 3.1 | 2.4 | 2.7 | 2.1 | | 80 |
| 82 | 2.2 | 2.0 | | 2.2 | | | 2.2 | | | 2.6 | | 2.7 | 2.0 | | 82 |
| 84 | | | | | | | | | | 2.1 | | 2.3 | | | 84 |
| 组合 Code | 121111 | 211111 | 222100 | 122111 | 221111 | 222200 | 122220 | 222111 | 222210 | 122221 | 222211 | 122222 | 222221 | 222222 | 组合 Code |
| 倍率 n | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 倍率 n |

起重性能表

Rated lifting load table

T 53.1~79.5 m

| | | 53.1-79.5 m | | 6.5 m | | 24 m | | 9.4×9.6 m | | 360° | | 153 t | | | |
|---------|--------|-------------|--------|--------|--------|--------|--------|-----------|--------|--------|--------|--------|--------|--------|---------|
| | | 53.1 | 53.1 | 53.1 | 58.4 | 58.4 | 58.4 | 63.6 | 63.6 | 63.6 | 68.9 | 68.9 | 74.2 | 74.2 | 79.5 |
| | | 6.5m | | | | | | | | | | | | | |
| | | 20° | | | | | | | | | | | | | |
| | | 24 m | | | | | | | | | | | | | |
| 22 | 11.9 | 11.9 | 11.9 | | | | | | | | | | | | 22 |
| 24 | 11.5 | 11.5 | 11.5 | 11.5 | 11.7 | 11.7 | | | | | | | | | 24 |
| 26 | 11.1 | 11.1 | 11.1 | 11.1 | 11.3 | 11.3 | 11.4 | 11.5 | 11.5 | 11.6 | 11.6 | | | | 26 |
| 28 | 10.9 | 10.9 | 10.9 | 10.9 | 11.0 | 10.9 | 11.0 | 11.1 | 11.1 | 11.3 | 11.2 | | | | 28 |
| 30 | 10.7 | 10.7 | 10.8 | 10.8 | 10.8 | 10.8 | 10.8 | 10.8 | 10.8 | 11.0 | 11.0 | 11.2 | 11.2 | | 30 |
| 32 | 10.4 | 10.4 | 10.4 | 10.7 | 10.6 | 10.7 | 10.8 | 10.8 | 10.8 | 10.8 | 10.8 | 11.0 | 10.9 | 6.5 | 32 |
| 34 | 10.0 | 10.0 | 10.0 | 10.3 | 10.2 | 10.3 | 10.5 | 10.4 | 10.5 | 10.7 | 10.7 | 10.6 | 10.5 | 6.3 | 34 |
| 36 | 9.7 | 9.7 | 9.6 | 10.0 | 9.9 | 10.0 | 10.1 | 10.2 | 10.2 | 10.4 | 10.4 | 10.2 | 10.2 | 6.0 | 36 |
| 38 | 9.4 | 9.4 | 9.4 | 9.7 | 9.6 | 9.7 | 9.9 | 9.8 | 9.9 | 10.2 | 10.1 | 9.7 | 9.6 | 5.8 | 38 |
| 40 | 9.1 | 9.1 | 9.2 | 9.4 | 9.3 | 9.4 | 9.7 | 9.6 | 9.6 | 9.8 | 9.8 | 9.4 | 9.2 | 5.5 | 40 |
| 42 | 8.8 | 8.8 | 8.8 | 9.2 | 9.1 | 9.2 | 9.5 | 9.4 | 9.4 | 9.6 | 9.6 | 8.9 | 8.9 | 5.3 | 42 |
| 44 | 8.5 | 8.5 | 8.6 | 8.9 | 8.9 | 9.0 | 9.1 | 9.2 | 9.2 | 9.4 | 9.4 | 8.6 | 8.7 | 5.0 | 44 |
| 46 | 8.3 | 8.3 | 8.4 | 8.6 | 8.7 | 8.7 | 8.9 | 8.8 | 8.9 | 9.2 | 9.2 | 8.3 | 8.3 | 4.8 | 46 |
| 48 | 8.1 | 8.1 | 8.2 | 8.4 | 8.5 | 8.3 | 8.7 | 8.6 | 8.7 | 9.0 | 9.0 | 8.3 | 8.1 | 4.6 | 48 |
| 50 | 7.9 | 7.9 | 8.0 | 8.2 | 8.2 | 8.1 | 8.5 | 8.4 | 8.5 | 8.8 | 8.8 | 8.0 | 7.8 | 4.3 | 50 |
| 52 | 7.7 | 7.7 | 7.7 | 8.0 | 8.0 | 8.0 | 8.3 | 8.2 | 8.3 | 8.6 | 8.6 | 7.8 | 7.6 | 3.9 | 52 |
| 54 | 7.5 | 7.5 | 7.5 | 7.8 | 7.8 | 7.8 | 8.1 | 8.2 | 8.1 | 8.4 | 8.4 | 7.5 | 7.3 | 3.6 | 54 |
| 56 | 7.4 | 7.4 | 7.3 | 7.6 | 7.7 | 7.6 | 8.0 | 8.0 | 7.9 | 8.2 | 8.2 | 7.2 | 7.1 | 3.2 | 56 |
| 58 | 7.2 | 7.2 | 7.3 | 7.5 | 7.5 | 7.5 | 7.8 | 7.8 | 7.7 | 8.2 | 8.2 | 7.1 | 6.9 | 2.8 | 58 |
| 60 | 7.1 | 7.1 | 7.1 | 7.4 | 7.4 | 7.4 | 7.6 | 7.6 | 7.7 | 8.0 | 8.0 | 6.4 | 6.3 | 2.6 | 60 |
| 62 | 6.9 | 6.9 | 6.9 | 7.2 | 7.2 | 7.0 | 7.5 | 7.5 | 7.3 | 7.8 | 7.7 | 6.0 | 5.7 | 2.1 | 62 |
| 64 | 6.9 | 6.9 | 6.0 | 7.1 | 6.8 | 6.2 | 7.3 | 6.8 | 6.5 | 7.6 | 6.9 | 6.0 | 5.5 | | 64 |
| 66 | 6.6 | 6.3 | 5.2 | 6.5 | 6.0 | 5.4 | 6.5 | 6.0 | 5.7 | 6.8 | 6.1 | 5.8 | 5.2 | | 66 |
| 68 | 5.8 | 5.5 | 4.4 | 5.7 | 5.3 | 4.6 | 5.7 | 5.2 | 4.9 | 6.1 | 5.3 | 4.8 | 4.2 | | 68 |
| 70 | 5.1 | 4.8 | 3.6 | 5.0 | 4.6 | 3.9 | 5.0 | 4.5 | 4.2 | 5.4 | 4.6 | 4.2 | 3.6 | | 70 |
| 72 | 4.4 | 4.1 | 2.9 | 4.3 | 3.9 | 3.2 | 4.3 | 3.9 | 3.6 | 4.7 | 4.0 | 4.1 | 3.4 | | 72 |
| 74 | 3.7 | 3.4 | 2.2 | 3.7 | 3.2 | 2.5 | 3.7 | 3.2 | 2.9 | 4.1 | 3.3 | 3.3 | 2.7 | | 74 |
| 76 | 3.0 | 2.7 | | 3.1 | 2.6 | | 3.1 | 2.6 | 2.3 | 3.5 | 2.7 | 2.8 | 2.2 | | 76 |
| 78 | | | | 2.5 | 2.0 | | 2.5 | 2.0 | | 2.9 | 2.2 | 2.4 | | | 78 |
| 80 | | | | | | | 2.0 | | | 2.4 | | 1.9 | | | 80 |
| 组合 Code | 121111 | 211111 | 222100 | 122111 | 221111 | 222200 | 122220 | 222111 | 222210 | 122221 | 222211 | 122222 | 222221 | 222222 | 组合 Code |
| 倍率 n | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 倍率 n |

起重性能表

Rated lifting load table

T 53.1~79.5 m

| | | 53.1-79.5 m | | 6.5 m | | 18 m | | 9.4×9.6 m | | 360° | | 153 t | | | |
|---------|--------|-------------|--------|--------|--------|--------|--------|-----------|--------|--------|--------|--------|--------|--------|---------|
| | | 53.1 | 53.1 | 53.1 | 58.4 | 58.4 | 58.4 | 63.6 | 63.6 | 63.6 | 68.9 | 68.9 | 74.2 | 74.2 | 79.5 |
| | | 6.5m | | | | | | | | | | | | | |
| | | 20° | | | | | | | | | | | | | |
| | | 18 m | | | | | | | | | | | | | |
| 18 | 16.7 | 16.7 | 16.7 | | | | | | | | | | | | 18 |
| 20 | 16.0 | 16.0 | 15.9 | 16.2 | 16.2 | 16.2 | | | | | | | | | 20 |
| 22 | 15.2 | 15.4 | 15.3 | 15.7 | 15.7 | 15.8 | 16.1 | 16.0 | 16.0 | | | | | | 22 |
| 24 | 14.8 | 14.8 | 14.7 | 15.0 | 15.0 | 15.1 | 15.6 | 15.5 | 15.5 | 15.9 | 15.8 | | | | 24 |
| 26 | 14.2 | 14.2 | 14.3 | 14.6 | 14.5 | 14.6 | 14.9 | 14.8 | 14.9 | 15.5 | 15.3 | 16.1 | 15.7 | | 26 |
| 28 | 13.8 | 13.8 | 13.8 | 14.2 | 14.1 | 14.2 | 14.5 | 14.4 | 14.5 | 14.9 | 14.8 | 15.7 | 15.4 | 9.2 | 28 |
| 30 | 13.4 | 13.4 | 13.3 | 13.6 | 13.7 | 13.7 | 14.1 | 14.1 | 14.1 | 14.3 | 14.3 | 15.2 | 14.8 | 8.9 | 30 |
| 32 | 12.8 | 13.0 | 13.0 | 13.2 | 13.4 | 13.2 | 13.5 | 13.7 | 13.7 | 13.9 | 14.0 | 14.5 | 14.3 | 8.6 | 32 |
| 34 | 12.4 | 12.6 | 12.6 | 12.8 | 13.0 | 12.8 | 13.1 | 13.3 | 13.3 | 13.5 | 13.6 | 13.8 | 13.7 | 8.3 | 34 |
| 36 | 12.0 | 12.2 | 12.2 | 12.5 | 12.6 | 12.5 | 12.7 | 12.9 | 12.9 | 13.1 | 13.2 | 13.3 | 13.2 | 7.9 | 36 |
| 38 | 11.8 | 11.8 | 11.8 | 12.2 | 12.2 | 12.2 | 12.5 | 12.5 | 12.5 | 12.9 | 12.9 | 12.9 | 12.8 | 7.6 | 38 |
| 40 | 11.4 | 11.4 | 11.5 | 11.9 | 11.9 | 11.8 | 12.3 | 12.3 | 12.3 | 12.7 | 12.7 | 12.7 | 12.5 | 7.3 | 40 |
| 42 | 11.2 | 11.2 | 11.2 | 11.6 | 11.6 | 11.5 | 12.0 | 11.9 | 11.9 | 12.5 | 12.4 | 12.4 | 12.1 | 7.0 | 42 |
| 44 | 11.0 | 11.0 | 10.9 | 11.3 | 11.3 | 11.3 | 11.7 | 11.7 | 11.7 | 12.2 | 12.1 | 12.0 | 11.7 | 6.7 | 44 |
| 46 | 10.9 | 10.9 | 10.8 | 11.1 | 11.1 | 11.1 | 11.3 | 11.5 | 11.3 | 11.5 | 11.6 | 11.7 | 11.3 | 6.4 | 46 |
| 48 | 10.8 | 10.8 | 10.8 | 11.0 | 11.0 | 11.0 | 11.1 | 11.1 | 11.1 | 11.1 | 11.1 | 11.3 | 10.9 | 6.2 | 48 |
| 50 | 10.8 | 10.8 | 10.7 | 10.9 | 10.9 | 10.9 | 11.0 | 10.9 | 11.0 | 9.5 | 9.5 | 9.7 | 9.4 | 6.0 | 50 |
| 52 | 10.4 | 10.6 | 10.5 | 10.8 | 10.8 | 10.8 | 10.9 | 10.8 | 10.9 | 9.1 | 9.1 | 8.8 | 8.8 | 5.7 | 52 |
| 54 | 10.4 | 10.2 | 9.6 | 10.7 | 10.4 | 9.9 | 10.8 | 10.4 | 10.3 | 9.0 | 8.6 | 8.7 | 8.4 | 5.5 | 54 |
| 56 | 10.1 | 9.8 | 8.5 | 10.0 | 9.5 | 8.8 | 10.0 | 9.5 | 9.2 | 8.8 | 8.1 | 8.7 | 8.0 | 5.3 | 56 |
| 58 | 9.0 | 8.8 | 7.5 | 9.0 | 8.5 | 7.8 | 9.0 | 8.5 | 8.2 | 8.4 | 7.7 | 8.2 | 7.5 | 5.1 | 58 |
| 60 | 8.1 | 7.8 | 6.5 | 8.0 | 7.6 | 6.8 | 8.1 | 7.5 | 7.2 | 8.1 | 7.3 | 7.8 | 7.1 | 5.0 | 60 |
| 62 | 7.2 | 6.9 | 5.6 | 7.2 | 6.7 | 5.9 | 7.2 | 6.6 | 6.3 | 7.6 | 6.8 | 7.6 | 6.8 | 4.8 | 62 |
| 64 | 6.3 | 6.0 | 4.7 | 6.3 | 5.8 | 5.1 | 6.3 | 5.8 | 5.5 | 6.8 | 6.0 | 6.8 | 6.0 | 4.6 | 64 |
| 66 | 5.5 | 5.2 | 3.9 | 5.5 | 5.0 | 4.3 | 5.6 | 5.0 | 4.7 | 6.0 | 5.2 | 6.1 | 5.3 | 4.4 | 66 |
| 68 | 4.7 | 4.4 | 3.1 | 4.8 | 4.3 | 3.5 | 4.8 | 4.3 | 4.0 | 5.3 | 4.5 | 5.3 | 4.5 | 3.9 | 68 |
| 70 | 4.0 | 3.7 | 2.4 | 4.1 | 3.5 | 2.8 | 4.1 | 3.6 | 3.3 | 4.6 | 3.8 | 5.0 | 4.1 | 3.7 | 70 |
| 72 | | | | 3.4 | 2.9 | 2.1 | 3.5 | 2.9 | 2.6 | 3.9 | 3.1 | 4.3 | 3.4 | 3.1 | 72 |
| 74 | | | | 2.7 | 2.2 | | 2.8 | 2.3 | 2.0 | 3.3 | 2.5 | 3.7 | 2.8 | 2.6 | 74 |
| 76 | | | | 2.1 | | | 2.2 | | | 2.7 | | 3.1 | 2.2 | 2.0 | 76 |
| 78 | | | | | | | | | | 2.2 | | 2.6 | | 2.0 | 78 |
| 80 | | | | | | | | | | | | 2.0 | | | 80 |
| 组合 Code | 121111 | 211111 | 222100 | 122111 | 221111 | 222200 | 122220 | 222111 | 222210 | 122221 | 222211 | 122222 | 222221 | 222222 | 组合 Code |
| 倍率 n | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 1 | 倍率 n |

起重性能表

Rated lifting load table

T 53.1~79.5 m

| | | 53.1-79.5 m | | 6.5 m | | 12 m | | 9.4×9.6 m | | 360° | | 153 t | | | |
|---------|--------|-------------|--------|--------|--------|--------|--------|-----------|--------|--------|--------|--------|--------|--------|---------|
| | | 53.1 | 53.1 | 53.1 | 58.4 | 58.4 | 58.4 | 63.6 | 63.6 | 63.6 | 68.9 | 68.9 | 74.2 | 74.2 | 79.5 |
| | | 6.5m | | | | | | | | | | | | | |
| | | 20° | | | | | | | | | | | | | |
| | | 12 m | | | | | | | | | | | | | |
| 16 | 27.2 | 27.2 | 27.7 | 27.5 | 27.4 | 27.5 | | | | | | | | | 16 |
| 18 | 26.4 | 26.4 | 26.6 | 26.4 | 26.6 | 26.7 | 26.5 | 26.5 | 26.5 | | | | | | 18 |
| 20 | 25.3 | 25.2 | 25.4 | 25.5 | 25.6 | 25.7 | 25.4 | 25.6 | 25.7 | 24.8 | 25.1 | | | | 20 |
| 22 | 24.5 | 24.4 | 24.6 | 24.4 | 24.7 | 24.8 | 24.6 | 24.5 | 24.6 | 24.0 | 24.4 | 20.0 | 21.0 | | 22 |
| 24 | 23.7 | 23.7 | 23.8 | 23.5 | 23.9 | 23.8 | 23.9 | 23.8 | 23.8 | 23.1 | 23.2 | 19.0 | 19.8 | | 24 |
| 26 | 22.5 | 22.9 | 22.7 | 22.7 | 23.1 | 22.8 | 23.1 | 23.0 | 23.1 | 22.4 | 22.3 | 18.3 | 18.8 | 14.0 | 26 |
| 28 | 21.7 | 22.1 | 21.8 | 22.0 | 22.3 | 22.2 | 22.3 | 22.3 | 22.3 | 21.3 | 21.5 | 17.7 | 18.0 | 12.9 | 28 |
| 30 | 21.3 | 21.3 | 21.4 | 21.4 | 21.7 | 21.6 | 21.3 | 21.6 | 21.7 | 20.0 | 20.3 | 17.1 | 17.4 | 12.4 | 30 |
| 32 | 20.9 | 20.9 | 20.7 | 21.0 | 21.2 | 21.1 | 20.5 | 20.5 | 20.5 | 19.0 | 19.2 | 16.3 | 16.7 | 11.9 | 32 |
| 34 | 20.1 | 20.1 | 20.2 | 20.3 | 20.5 | 20.4 | 19.5 | 19.5 | 19.5 | 18.1 | 18.3 | 15.4 | 16.1 | 11.3 | 34 |
| 36 | 19.7 | 19.7 | 19.8 | 19.2 | 19.4 | 19.2 | 18.0 | 18.3 | 18.4 | 17.2 | 17.4 | 15.1 | 15.6 | 10.9 | 36 |
| 38 | 18.9 | 18.9 | 19.1 | 18.4 | 18.3 | 18.1 | 17.9 | 17.8 | 17.5 | 16.3 | 16.6 | 13.9 | 14.5 | 10.5 | 38 |
| 40 | 18.5 | 18.5 | 17.6 | 17.9 | 17.9 | 17.2 | 17.5 | 17.5 | 16.7 | 15.7 | 15.8 | 13.5 | 13.8 | 10.0 | 40 |
| 42 | 17.6 | 17.6 | 16.0 | 17.6 | 16.8 | 16.0 | 16.7 | 16.7 | 15.9 | 15.6 | 15.1 | 12.8 | 13.1 | 9.3 | 42 |
| 44 | 16.0 | 16.0 | 14.4 | 16.0 | 15.2 | 14.4 | 14.3 | 13.6 | 13.6 | 13.6 | 12.9 | 12.6 | 12.4 | 8.9 | 44 |
| 46 | 14.4 | 14.4 | 13.4 | 14.4 | 14.4 | 13.6 | 13.6 | 12.8 | 12.8 | 13.0 | 12.2 | 11.9 | 11.6 | 8.6 | 46 |
| 48 | 13.6 | 13.3 | 11.9 | 13.6 | 12.8 | 12.0 | 12.3 | 12.3 | 12.2 | 12.4 | 11.7 | 11.6 | 11.0 | 8.3 | 48 |
| 50 | 12.0 | 11.9 | 10.6 | 12.0 | 11.7 | 10.9 | 12.0 | 11.8 | 11.2 | 11.1 | 11.1 | 10.5 | 9.8 | 8.0 | 50 |
| 52 | 11.0 | 10.7 | 9.3 | 11.0 | 10.4 | 9.6 | 11.1 | 10.4 | 10.2 | 11.2 | 10.4 | 9.9 | 9.1 | 7.7 | 52 |
| 54 | 9.8 | 9.5 | 8.1 | 9.9 | 9.3 | 8.5 | 9.9 | 9.3 | 9.0 | 10.4 | 9.6 | 9.1 | 8.4 | 7.5 | 54 |
| 56 | 8.7 | 8.4 | 7.0 | 8.8 | 8.2 | 7.4 | 8.8 | 8.3 | 7.9 | 9.4 | 8.5 | 8.4 | 7.7 | 7.2 | 56 |
| 58 | 7.7 | 7.4 | 6.0 | 7.8 | 7.2 | 6.4 | 7.9 | 7.3 | 6.9 | 8.4 | 7.5 | 7.8 | 7.0 | 7.0 | 58 |
| 60 | 6.7 | 6.4 | 5.0 | 6.8 | 6.3 | 5.5 | 6.9 | 6.3 | 6.0 | 7.4 | 6.6 | 7.2 | 6.3 | 6.3 | 60 |
| 62 | 5.8 | 5.5 | 4.1 | 5.9 | 5.4 | 4.6 | 6.1 | 5.5 | 5.1 | 6.6 | 5.7 | 6.5 | 5.6 | 5.4 | 62 |
| 64 | 5.0 | 4.6 | 3.2 | 5.1 | 4.6 | 3.7 | 5.2 | 4.7 | 4.3 | 5.8 | 4.9 | 5.8 | 4.9 | 4.7 | 64 |
| 66 | | | | 4.3 | 3.8 | 2.9 | 4.5 | 3.9 | 3.5 | 5.0 | 4.2 | 5.1 | 4.2 | 4.0 | 66 |
| 68 | | | | 3.6 | 3.0 | 2.2 | 3.7 | 3.2 | 2.8 | 4.3 | 3.4 | 4.6 | 3.7 | 3.7 | 68 |
| 70 | | | | 2.8 | 2.3 | | 3.0 | 2.5 | 2.1 | 3.6 | 2.8 | 3.9 | 3.0 | 3.0 | 70 |
| 72 | | | | | | | 2.4 | | | 3.0 | 2.1 | 3.2 | 2.3 | 2.3 | 72 |
| 74 | | | | | | | | | | 2.4 | | 2.9 | | 2.0 | 74 |
| 76 | | | | | | | | | | | | 2.3 | | | 76 |
| 组合 Code | 121111 | 211111 | 222100 | 122111 | 221111 | 222200 | 122220 | 222111 | 222210 | 122221 | 222211 | 122222 | 222221 | 222222 | 组合 Code |
| 倍率 n | 3 | 3 | 3 | 3 | 3 | 3 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 倍率 n |

起重性能表


Rated lifting load table

T 53.1~79.5 m

| | | 53.1-79.5 m | | 6.5 m | | 6 m | | 9.4×9.6 m | | 360° | | 153 t | | | |
|---------|--------|-------------|--------|--------|--------|--------|--------|-----------|--------|--------|--------|--------|--------|--------|---------|
| | | 53.1 | 53.1 | 53.1 | 58.4 | 58.4 | 58.4 | 63.6 | 63.6 | 63.6 | 68.9 | 68.9 | 74.2 | 74.2 | 79.5 |
| | | 6.5m | | | | | | | | | | | | | |
| | | 20° | | | | | | | | | | | | | |
| | | 6 m | | | | | | | | | | | | | |
| 12 | 36.8 | 36.8 | 36.9 | | | | | | | | | | | | 12 |
| 14 | 35.3 | 35.2 | 35.4 | 35.3 | 35.3 | 35.4 | | | | | | | | | 14 |
| 16 | 33.7 | 33.8 | 33.9 | 33.8 | 33.8 | 33.9 | 33.8 | 33.9 | 34.0 | 33.3 | 33.8 | | | | 16 |
| 18 | 32.3 | 32.5 | 32.4 | 32.6 | 33.0 | 33.1 | 32.7 | 32.5 | 32.7 | 32.4 | 32.7 | 29.0 | 29.0 | | 18 |
| 20 | 31.1 | 31.1 | 31.2 | 31.5 | 31.5 | 31.6 | 31.6 | 31.5 | 31.5 | 30.5 | 31.1 | 28.0 | 28.0 | 24.0 | 20 |
| 22 | 29.9 | 30.0 | 30.1 | 30.3 | 30.7 | 30.4 | 30.4 | 30.7 | 30.8 | 28.7 | 29.2 | 25.7 | 26.3 | 21.0 | 22 |
| 24 | 28.8 | 29.1 | 28.9 | 29.5 | 29.5 | 29.5 | 28.9 | 29.1 | 29.2 | 27.1 | 27.3 | 24.1 | 24.5 | 19.3 | 24 |
| 26 | 28.1 | 28.0 | 28.1 | 28.0 | 28.3 | 28.0 | 27.2 | 27.2 | 27.3 | 25.6 | 25.8 | 22.7 | 23.1 | 18.2 | 26 |
| 28 | 27.3 | 27.3 | 27.4 | 26.4 | 26.5 | 26.5 | 25.3 | 25.6 | 25.7 | 24.1 | 24.3 | 21.2 | 21.7 | 17.2 | 28 |
| 30 | 26.5 | 26.5 | 26.6 | 24.9 | 24.9 | 25.0 | 23.9 | 24.2 | 24.2 | 22.9 | 22.9 | 19.9 | 20.3 | 16.5 | 30 |
| 32 | 25.0 | 25.0 | 24.8 | 23.5 | 23.5 | 22.8 | 23.6 | 22.8 | 22.8 | 22.4 | 21.8 | 18.7 | 19.1 | 15.8 | 32 |
| 34 | 23.5 | 23.2 | 22.4 | 22.2 | 22.2 | 21.4 | 22.3 | 21.6 | 21.6 | 21.4 | 20.6 | 18.2 | 18.0 | 15.1 | 34 |
| 36 | 20.8 | 20.8 | 20.0 | 20.2 | 19.5 | 18.7 | 18.9 | 18.9 | 18.2 | 18.7 | 18.0 | 17.5 | 16.9 | 14.5 | 36 |
| 38 | 19.7 | 19.2 | 18.4 | 18.3 | 18.3 | 17.5 | 18.6 | 17.8 | 17.8 | 17.8 | 17.0 | 16.5 | 15.9 | 14.0 | 38 |
| 40 | 17.6 | 17.6 | 16.0 | 17.1 | 17.1 | 16.4 | 17.6 | 16.8 | 16.8 | 16.8 | 16.0 | 15.4 | 14.7 | 13.5 | 40 |
| 42 | 16.8 | 16.0 | 15.0 | 15.6 | 15.6 | 14.8 | 16.0 | 15.2 | 15.2 | 14.8 | 14.8 | 14.7 | 14.0 | 13.0 | 42 |
| 44 | 15.1 | 14.3 | 13.1 | 14.6 | 13.8 | 13.0 | 13.5 | 13.5 | 12.8 | 13.7 | 13.0 | 13.3 | 12.6 | 12.3 | 44 |
| 46 | 13.5 | 13.1 | 11.6 | 13.6 | 12.8 | 12.0 | 13.3 | 12.7 | 12.7 | 13.0 | 12.2 | 11.9 | 11.2 | 10.4 | 46 |
| 48 | 12.0 | 11.7 | 10.1 | 12.0 | 11.6 | 10.6 | 12.0 | 11.7 | 11.2 | 12.2 | 11.4 | 11.2 | 10.5 | 9.5 | 48 |
| 50 | 10.6 | 10.3 | 8.7 | 10.8 | 10.2 | 9.3 | 11.0 | 10.3 | 10.0 | 11.2 | 10.4 | 9.8 | 9.1 | 8.8 | 50 |
| 52 | 9.3 | 9.0 | 7.4 | 9.6 | 9.0 | 8.1 | 9.8 | 9.1 | 8.7 | 10.4 | 9.4 | 9.3 | 8.4 | 7.6 | 52 |
| 54 | 8.2 | 7.8 | 6.3 | 8.5 | 7.9 | 6.9 | 8.6 | 8.0 | 7.6 | 9.3 | 8.3 | 8.4 | 7.7 | 7.1 | 54 |
| 56 | 7.1 | 6.7 | 5.2 | 7.4 | 6.8 | 5.9 | 7.6 | 7.0 | 6.6 | 8.2 | 7.3 | 7.9 | 7.0 | 6.3 | 56 |
| 58 | 6.0 | 5.7 | 4.2 | 6.4 | 5.8 | 4.9 | 6.6 | 6.0 | 5.6 | 7.3 | 6.3 | 7.3 | 6.3 | 5.7 | 58 |
| 60 | | | | 5.5 | 4.9 | 4.0 | 5.7 | 5.1 | 4.7 | 6.4 | 5.4 | 6.6 | 5.6 | 5.0 | 60 |
| 62 | | | | 4.6 | 4.0 | 3.1 | 4.9 | 4.2 | 3.8 | 5.5 | 4.6 | 5.9 | 4.9 | 4.8 | 62 |
| 64 | | | | 3.8 | 3.2 | 2.3 | 4.1 | 3.4 | 3.0 | 4.7 | 3.8 | 5.2 | 4.2 | 4.1 | 64 |
| 66 | | | | | | | 3.3 | 2.7 | 2.3 | 4.0 | 3.1 | 4.5 | 3.5 | 3.4 | 66 |
| 68 | | | | | | | 2.6 | 2.0 | | 3.3 | 2.4 | 3.9 | 2.9 | 3.0 | 68 |
| 70 | | | | | | | | | | 2.6 | | 3.2 | 2.2 | 2.4 | 70 |
| 72 | | | | | | | | | | 2.0 | | 2.6 | | | 72 |
| 74 | | | | | | | | | | | | 2.0 | | | 74 |
| 组合 Code | 121111 | 211111 | 222100 | 122111 | 221111 | 222200 | 122220 | 222111 | 222210 | 122221 | 222211 | 122222 | 222221 | 222222 | 组合 Code |
| 倍率 n | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 2 | 倍率 n |

起升高度曲线图
Lifting height chart


主臂+超起+副臂
Boom+ Super lifting device + Jib

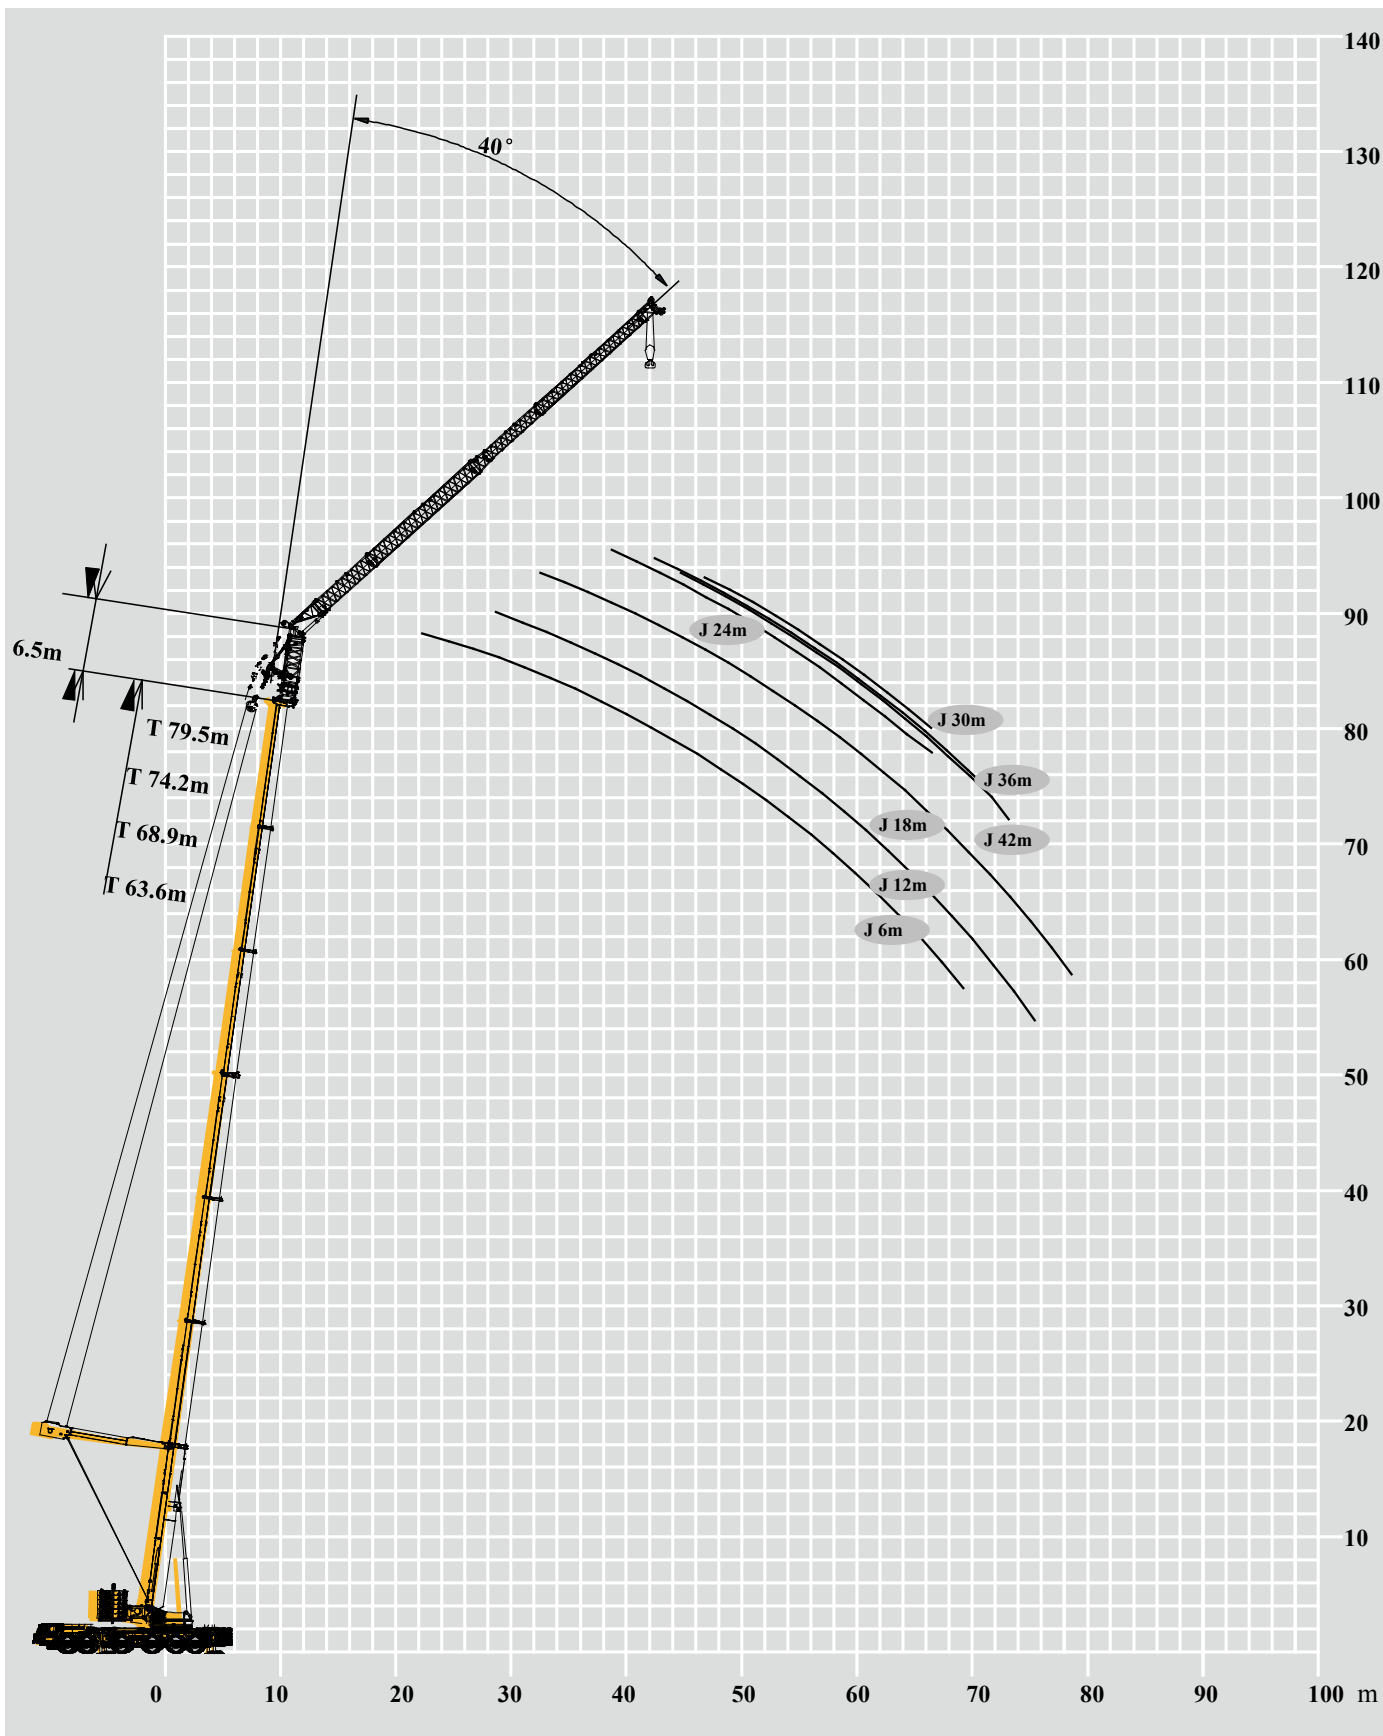

起重性能表

Rated lifting load table

T 53.1~63.6 m




| | 53.1 | | | 58.4 | | | 63.6 | | | |
|---------|--------|--------|--------|--------|--------|--------|--------|--------|--------|---------|
| | 6.5m | | | | | | | | | |
| | 40° | | | | | | | | | |
| | 42 m | | | | | | | | | |
| 44 | 2.9 | 2.9 | 2.9 | 2.9 | 2.9 | 2.9 | | | | 44 |
| 46 | 2.8 | 2.8 | 2.8 | 2.8 | 2.8 | 2.8 | 2.9 | 2.9 | 2.9 | 46 |
| 48 | 2.8 | 2.8 | 2.8 | 2.8 | 2.8 | 2.8 | 2.8 | 2.8 | 2.8 | 48 |
| 50 | 2.7 | 2.7 | 2.7 | 2.7 | 2.7 | 2.7 | 2.8 | 2.8 | 2.8 | 50 |
| 52 | 2.6 | 2.6 | 2.6 | 2.6 | 2.6 | 2.6 | 2.7 | 2.7 | 2.7 | 52 |
| 54 | 2.6 | 2.6 | 2.6 | 2.6 | 2.6 | 2.6 | 2.6 | 2.6 | 2.6 | 54 |
| 56 | 2.5 | 2.5 | 2.5 | 2.5 | 2.5 | 2.5 | 2.6 | 2.6 | 2.6 | 56 |
| 58 | 2.4 | 2.4 | 2.4 | 2.5 | 2.5 | 2.5 | 2.5 | 2.5 | 2.5 | 58 |
| 60 | 2.4 | 2.3 | 2.4 | 2.4 | 2.4 | 2.4 | 2.5 | 2.5 | 2.5 | 60 |
| 62 | 2.3 | 2.3 | 2.3 | 2.4 | 2.4 | 2.4 | 2.4 | 2.4 | 2.4 | 62 |
| 64 | 2.3 | 2.3 | 2.3 | 2.3 | 2.3 | 2.3 | 2.4 | 2.4 | 2.4 | 64 |
| 66 | 2.2 | 2.2 | 2.2 | 2.3 | 2.3 | 2.3 | 2.4 | 2.3 | 2.4 | 66 |
| 68 | 2.2 | 2.2 | 2.2 | 2.3 | 2.3 | 2.3 | 2.3 | 2.3 | 2.3 | 68 |
| 70 | 2.2 | 2.2 | 2.2 | 2.2 | 2.2 | 2.2 | 2.3 | 2.3 | 2.3 | 70 |
| 72 | 2.1 | 2.1 | 2.1 | 2.2 | 2.2 | 2.2 | 2.3 | 2.2 | 2.2 | 72 |
| 74 | 2.1 | 2.1 | 2.1 | 2.2 | 2.2 | 2.2 | 2.2 | 2.2 | 2.2 | 74 |
| 76 | 2.1 | 2.1 | 2.1 | 2.1 | 2.1 | 2.1 | 2.2 | 2.2 | 2.2 | 76 |
| 78 | 2.1 | 2.1 | 2.1 | 2.1 | 2.1 | 2.1 | 2.2 | 2.2 | 2.2 | 78 |
| 80 | 2.1 | 2.1 | 2.0 | 2.1 | 2.1 | 2.1 | 2.1 | 2.1 | 2.1 | 80 |
| 82 | 2.0 | 2.0 | 2.0 | 2.1 | 2.1 | 2.1 | 2.1 | 2.1 | 2.1 | 82 |
| 84 | 2.0 | 2.0 | 2.0 | 2.1 | 2.1 | 2.1 | 2.1 | 2.1 | 2.1 | 84 |
| 86 | | | | 2.1 | 2.1 | 2.1 | 2.1 | 2.1 | 2.1 | 86 |
| 88 | | | | 2.1 | 2.1 | | 2.1 | 2.1 | 2.1 | 88 |
| 90 | | | | | | | 2.1 | | | 90 |
| 组合 Code | 121111 | 211111 | 222100 | 122111 | 221111 | 222200 | 122220 | 222111 | 222210 | 组合 Code |
| 倍率 n | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 倍率 n |

起重性能表

Rated lifting load table

T 53.1~68.9 m



| | 53.1 | 53.1 | 53.1 | 58.4 | 58.4 | 58.4 | 63.6 | 63.6 | 63.6 | 68.9 | 68.9 | |
|---------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|---------|
| | 6.5m | | | | | | | | | | | |
| | 40° | | | | | | | | | | | |
| | 36 m | | | | | | | | | | | |
| 38 | 4.2 | 4.2 | 4.2 | | | | | | | | | 38 |
| 40 | 4.1 | 4.1 | 4.1 | 4.2 | 4.2 | 4.2 | | | | | | 40 |
| 42 | 4.0 | 4.0 | 4.0 | 4.1 | 4.1 | 4.1 | 4.1 | 4.1 | 4.1 | | | 42 |
| 44 | 3.9 | 3.9 | 3.9 | 4.0 | 4.0 | 4.0 | 4.0 | 4.0 | 4.0 | 4.1 | 4.1 | 44 |
| 46 | 3.8 | 3.8 | 3.8 | 3.9 | 3.9 | 3.9 | 3.9 | 3.9 | 3.9 | 4.0 | 4.0 | 46 |
| 48 | 3.7 | 3.7 | 3.7 | 3.8 | 3.8 | 3.8 | 3.8 | 3.8 | 3.8 | 3.9 | 3.9 | 48 |
| 50 | 3.6 | 3.7 | 3.6 | 3.8 | 3.8 | 3.8 | 3.8 | 3.8 | 3.8 | 3.7 | 3.7 | 50 |
| 52 | 3.6 | 3.6 | 3.6 | 3.7 | 3.7 | 3.7 | 3.7 | 3.7 | 3.7 | 3.7 | 3.7 | 52 |
| 54 | 3.5 | 3.5 | 3.5 | 3.6 | 3.6 | 3.6 | 3.7 | 3.7 | 3.7 | 3.7 | 3.7 | 54 |
| 56 | 3.5 | 3.5 | 3.5 | 3.6 | 3.6 | 3.6 | 3.6 | 3.6 | 3.6 | 3.6 | 3.6 | 56 |
| 58 | 3.4 | 3.4 | 3.4 | 3.5 | 3.5 | 3.5 | 3.5 | 3.5 | 3.5 | 3.6 | 3.6 | 58 |
| 60 | 3.4 | 3.4 | 3.3 | 3.4 | 3.5 | 3.4 | 3.5 | 3.5 | 3.5 | 3.6 | 3.6 | 60 |
| 62 | 3.3 | 3.3 | 3.3 | 3.4 | 3.4 | 3.4 | 3.4 | 3.4 | 3.4 | 3.5 | 3.5 | 62 |
| 64 | 3.3 | 3.3 | 3.3 | 3.4 | 3.4 | 3.4 | 3.4 | 3.4 | 3.4 | 3.1 | 3.1 | 64 |
| 66 | 3.2 | 3.2 | 3.2 | 3.3 | 3.3 | 3.3 | 3.4 | 3.4 | 3.4 | 2.9 | 2.9 | 66 |
| 68 | 3.2 | 3.2 | 3.2 | 3.2 | 3.2 | 3.3 | 3.3 | 3.3 | 3.3 | 2.7 | 2.7 | 68 |
| 70 | 3.2 | 3.2 | 3.2 | 3.2 | 3.2 | 3.2 | 3.3 | 3.3 | 3.3 | 2.3 | 2.3 | 70 |
| 72 | 3.1 | 3.1 | 3.1 | 3.2 | 3.2 | 3.2 | 3.3 | 3.3 | 3.3 | 1.9 | 1.9 | 72 |
| 74 | 3.1 | 3.1 | 3.1 | 3.2 | 3.2 | 3.2 | 3.2 | 3.2 | 3.2 | 1.9 | | 74 |
| 76 | 3.1 | 3.1 | 3.1 | 3.2 | 3.1 | 3.1 | 3.2 | 3.2 | 3.2 | | | 76 |
| 78 | 3.1 | 3.1 | 3.1 | 3.1 | 3.1 | 3.1 | 3.2 | 3.2 | 3.2 | | | 78 |
| 80 | | | | 3.1 | 3.1 | 3.1 | 3.2 | 3.2 | 3.2 | | | 80 |
| 82 | | | | 3.1 | 3.1 | 2.6 | 3.2 | 3.2 | 3.0 | | | 82 |
| 84 | | | | | | | 3.0 | 2.6 | 2.4 | | | 84 |
| 86 | | | | | | | 2.4 | 2.0 | | | | 86 |
| 组合 Code | 121111 | 211111 | 222100 | 122111 | 221111 | 222200 | 122220 | 222111 | 222210 | 122221 | 222211 | 组合 Code |
| 倍率 n | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 倍率 n |

起重性能表

Rated lifting load table








T 53.1~74.2 m

| m | | | | | | | | | | | | | m | |
|---------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|---------|
| | 53.1 | 53.1 | 53.1 | 58.4 | 58.4 | 58.4 | 63.6 | 63.6 | 63.6 | 68.9 | 68.9 | 74.2 | | 74.2 |
| | 6.5m | | | | | | | | | | | | | |
| | 40° | | | | | | | | | | | | | |
| 30 m | | | | | | | | | | | | | | |
| 32 | 5.6 | 5.6 | 5.6 | | | | | | | | | | | 32 |
| 34 | 5.4 | 5.4 | 5.4 | 5.5 | 5.5 | 5.5 | | | | | | | | 34 |
| 36 | 5.3 | 5.4 | 5.3 | 5.4 | 5.4 | 5.4 | 5.5 | 5.5 | 5.5 | | | | | 36 |
| 38 | 5.2 | 5.2 | 5.2 | 5.3 | 5.3 | 5.3 | 5.4 | 5.4 | 5.4 | 5.4 | 5.4 | | | 38 |
| 40 | 5.1 | 5.1 | 5.1 | 5.2 | 5.2 | 5.2 | 5.3 | 5.3 | 5.3 | 5.3 | 5.3 | | | 40 |
| 42 | 5.0 | 5.0 | 5.0 | 5.1 | 5.1 | 5.1 | 5.2 | 5.2 | 5.2 | 5.2 | 5.2 | 5.5 | 5.4 | 42 |
| 44 | 4.9 | 4.9 | 4.9 | 5.0 | 5.0 | 5.0 | 5.1 | 5.1 | 5.1 | 5.1 | 5.1 | 5.4 | 5.3 | 44 |
| 46 | 4.8 | 4.8 | 4.8 | 4.9 | 4.9 | 5.0 | 5.0 | 5.0 | 5.0 | 5.1 | 5.1 | 5.3 | 5.2 | 46 |
| 48 | 4.8 | 4.8 | 4.8 | 4.8 | 4.8 | 4.9 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.1 | 5.1 | 48 |
| 50 | 4.7 | 4.7 | 4.7 | 4.7 | 4.7 | 4.8 | 4.9 | 4.9 | 4.9 | 4.9 | 4.9 | 5.1 | 5.0 | 50 |
| 52 | 4.6 | 4.6 | 4.6 | 4.7 | 4.7 | 4.7 | 4.8 | 4.8 | 4.8 | 4.9 | 4.9 | 4.9 | 4.8 | 52 |
| 54 | 4.5 | 4.5 | 4.5 | 4.6 | 4.6 | 4.7 | 4.8 | 4.8 | 4.7 | 4.8 | 4.8 | 4.6 | 4.6 | 54 |
| 56 | 4.5 | 4.5 | 4.5 | 4.6 | 4.6 | 4.5 | 4.7 | 4.7 | 4.7 | 4.8 | 4.8 | 4.3 | 4.3 | 56 |
| 58 | 4.4 | 4.4 | 4.4 | 4.5 | 4.5 | 4.5 | 4.6 | 4.6 | 4.6 | 4.7 | 4.7 | 3.9 | 3.8 | 58 |
| 60 | 4.4 | 4.4 | 4.4 | 4.4 | 4.4 | 4.4 | 4.6 | 4.6 | 4.6 | 4.7 | 4.7 | 3.5 | 3.4 | 60 |
| 62 | 4.3 | 4.3 | 4.3 | 4.4 | 4.4 | 4.4 | 4.5 | 4.5 | 4.5 | 4.6 | 4.6 | 3.1 | 3.0 | 62 |
| 64 | 4.3 | 4.3 | 4.3 | 4.4 | 4.4 | 4.4 | 4.5 | 4.5 | 4.5 | 4.6 | 4.6 | 3.0 | 3.0 | 64 |
| 66 | 4.3 | 4.3 | 4.3 | 4.3 | 4.3 | 4.3 | 4.5 | 4.4 | 4.5 | 4.6 | 4.5 | 2.6 | 2.5 | 66 |
| 68 | 4.3 | 4.3 | 4.3 | 4.3 | 4.3 | 4.3 | 4.4 | 4.4 | 4.4 | 4.5 | 4.5 | 2.3 | 2.3 | 68 |
| 70 | 4.2 | 4.2 | 4.2 | 4.3 | 4.3 | 4.3 | 4.4 | 4.4 | 4.4 | 4.5 | 4.5 | 2.1 | 2.1 | 70 |
| 72 | 4.2 | 4.2 | 4.2 | 4.3 | 4.3 | 4.3 | 4.4 | 4.4 | 4.4 | 4.5 | 4.5 | 2.0 | | 72 |
| 74 | | | | 4.3 | 4.3 | 4.2 | 4.4 | 4.3 | 4.3 | 4.5 | 4.4 | | | 74 |
| 76 | | | | 4.3 | 4.1 | 3.5 | 4.4 | 4.2 | 3.9 | 4.5 | 4.4 | | | 76 |
| 78 | | | | | | | 3.9 | 3.5 | 3.2 | 4.3 | 3.7 | | | 78 |
| 80 | | | | | | | 3.3 | 2.8 | 2.6 | 3.7 | 3.1 | | | 80 |
| 82 | | | | | | | | | | 3.1 | 2.5 | | | 82 |
| 84 | | | | | | | | | | 2.5 | | | | 84 |
| 86 | | | | | | | | | | | | | | 86 |
| 组合 Code | 121111 | 211111 | 222100 | 122111 | 221111 | 222200 | 122220 | 222111 | 222210 | 122221 | 222211 | 122222 | 222221 | 组合 Code |
| 倍率 n | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 倍率 n |

起重性能表

Rated lifting load table

T 53.1~79.5 m

| m |        | | | | | | | | | | | | | | m |
|---------|---|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|---------|
| | 53.1 | 53.1 | 53.1 | 58.4 | 58.4 | 58.4 | 63.6 | 63.6 | 63.6 | 68.9 | 68.9 | 74.2 | 74.2 | 79.5 | |
| | 6.5m | | | | | | | | | | | | | | |
| | 40° | | | | | | | | | | | | | | |
| 24 m | | | | | | | | | | | | | | | |
| 28 | 8.1 | 8.1 | 8.1 | 8.3 | 8.3 | 8.1 | | | | | | | | | 28 |
| 30 | 7.9 | 7.9 | 7.9 | 8.1 | 8.1 | 8.1 | 8.2 | 8.3 | 8.2 | | | | | | 30 |
| 32 | 7.8 | 7.8 | 7.7 | 7.9 | 7.9 | 8.0 | 8.0 | 8.1 | 8.0 | 8.2 | 8.2 | | | | 32 |
| 34 | 7.6 | 7.6 | 7.7 | 7.7 | 7.7 | 7.8 | 7.8 | 7.9 | 7.8 | 8.0 | 8.0 | | | | 34 |
| 36 | 7.4 | 7.4 | 7.5 | 7.6 | 7.6 | 7.6 | 7.7 | 7.7 | 7.7 | 7.8 | 7.8 | 8.2 | 8.1 | | 36 |
| 38 | 7.4 | 7.4 | 7.3 | 7.5 | 7.5 | 7.5 | 7.5 | 7.6 | 7.5 | 7.7 | 7.6 | 8.0 | 7.9 | 5.2 | 38 |
| 40 | 7.2 | 7.2 | 7.2 | 7.4 | 7.4 | 7.4 | 7.5 | 7.5 | 7.5 | 7.6 | 7.6 | 7.9 | 7.7 | 5.1 | 40 |
| 42 | 7.1 | 7.1 | 7.1 | 7.2 | 7.2 | 7.2 | 7.3 | 7.4 | 7.3 | 7.5 | 7.4 | 7.6 | 7.5 | 4.9 | 42 |
| 44 | 7.0 | 7.0 | 6.9 | 7.1 | 7.1 | 7.1 | 7.3 | 7.3 | 7.3 | 7.4 | 7.4 | 7.6 | 7.3 | 4.7 | 44 |
| 46 | 6.9 | 6.9 | 6.9 | 7.0 | 7.0 | 7.0 | 7.1 | 7.2 | 7.1 | 7.3 | 7.3 | 7.3 | 7.1 | 4.5 | 46 |
| 48 | 6.8 | 6.8 | 6.7 | 6.9 | 6.9 | 6.9 | 7.1 | 7.1 | 7.1 | 7.3 | 7.2 | 7.2 | 7.0 | 4.3 | 48 |
| 50 | 6.7 | 6.7 | 6.7 | 6.9 | 6.9 | 6.9 | 6.9 | 7.0 | 6.9 | 7.2 | 7.2 | 7.0 | 6.8 | 4.0 | 50 |
| 52 | 6.7 | 6.7 | 6.6 | 6.8 | 6.8 | 6.8 | 6.9 | 6.9 | 6.9 | 7.1 | 7.0 | 6.7 | 6.6 | 3.7 | 52 |
| 54 | 6.5 | 6.5 | 6.6 | 6.7 | 6.7 | 6.7 | 6.9 | 6.9 | 6.8 | 7.0 | 7.0 | 6.5 | 6.4 | 3.4 | 54 |
| 56 | 6.5 | 6.5 | 6.5 | 6.7 | 6.6 | 6.7 | 6.7 | 6.8 | 6.8 | 7.0 | 7.0 | 6.4 | 6.3 | 3.1 | 56 |
| 58 | 6.5 | 6.5 | 6.5 | 6.6 | 6.6 | 6.6 | 6.7 | 6.7 | 6.6 | 6.9 | 6.8 | 6.2 | 6.1 | 2.8 | 58 |
| 60 | 6.4 | 6.4 | 6.4 | 6.5 | 6.4 | 6.5 | 6.7 | 6.7 | 6.6 | 6.8 | 6.8 | 6.1 | 5.9 | 2.7 | 60 |
| 62 | 6.4 | 6.4 | 6.4 | 6.5 | 6.4 | 6.5 | 6.6 | 6.7 | 6.6 | 6.8 | 6.8 | 6.0 | 5.8 | 2.4 | 62 |
| 64 | 6.4 | 6.4 | 6.4 | 6.4 | 6.4 | 6.4 | 6.6 | 6.6 | 6.6 | 6.8 | 6.8 | 5.9 | 5.7 | 2.0 | 64 |
| 66 | 6.4 | 6.4 | 5.7 | 6.4 | 6.4 | 6.1 | 6.6 | 6.6 | 6.5 | 6.7 | 6.7 | 5.7 | 5.6 | 2.0 | 66 |
| 68 | | | | 6.3 | 5.9 | 5.2 | 6.4 | 6.0 | 5.7 | 6.7 | 6.2 | 5.6 | 5.3 | | 68 |
| 70 | | | | 5.5 | 5.1 | 4.4 | 5.6 | 5.2 | 4.9 | 6.1 | 5.4 | 5.1 | 4.5 | | 70 |
| 72 | | | | | | | 4.9 | 4.4 | 4.1 | 5.3 | 4.6 | 5.0 | 4.3 | | 72 |
| 74 | | | | | | | 4.2 | 3.7 | 3.4 | 4.6 | 3.9 | 4.3 | 3.6 | | 74 |
| 76 | | | | | | | | | | 4.0 | 3.3 | 3.6 | 3.0 | | 76 |
| 78 | | | | | | | | | | 3.3 | 2.6 | 2.8 | 2.3 | | 78 |
| 80 | | | | | | | | | | | | 2.1 | 2.3 | | 80 |
| 82 | | | | | | | | | | | | | | | 82 |
| 组合 Code | 121111 | 211111 | 222100 | 122111 | 221111 | 222200 | 122220 | 222111 | 222210 | 122221 | 222211 | 122222 | 222221 | 222222 | 组合 Code |
| 倍率 n | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 倍率 n |

起重性能表

Rated lifting load table

T 53.1~79.5 m

| | 53.1 | 53.1 | 53.1 | 58.4 | 58.4 | 58.4 | 63.6 | 63.6 | 63.6 | 68.9 | 68.9 | 74.2 | 74.2 | 79.5 | |
|---------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|---------|
| | 6.5m | | | | | | | | | | | | | | |
| | 40° | | | | | | | | | | | | | | |
| 18 m | | | | | | | | | | | | | | | |
| 22 | 11.1 | 11.1 | 11.1 | | | | | | | | | | | | 22 |
| 24 | 11.0 | 11.0 | 11.0 | 11.0 | 11.0 | 11.0 | | | | | | | | | 24 |
| 26 | 10.9 | 10.9 | 10.9 | 10.9 | 10.9 | 10.9 | 11.0 | 11.0 | 11.0 | | | | | | 26 |
| 28 | 10.8 | 10.8 | 10.8 | 10.8 | 10.8 | 10.8 | 11.0 | 10.9 | 11.0 | 11.1 | 11.0 | | | | 28 |
| 30 | 10.8 | 10.8 | 10.8 | 10.7 | 10.7 | 10.6 | 10.9 | 10.8 | 10.9 | 10.9 | 11.0 | 11.4 | 11.2 | | 30 |
| 32 | 10.6 | 10.8 | 10.6 | 10.7 | 10.7 | 10.5 | 10.8 | 10.8 | 10.8 | 10.8 | 10.9 | 11.3 | 11.1 | 7.5 | 32 |
| 34 | 10.6 | 10.6 | 10.4 | 10.7 | 10.7 | 10.3 | 10.8 | 10.8 | 10.8 | 10.8 | 10.8 | 10.9 | 10.7 | 7.3 | 34 |
| 36 | 10.4 | 10.4 | 10.4 | 10.5 | 10.5 | 10.3 | 10.7 | 10.7 | 10.7 | 10.8 | 10.8 | 10.6 | 10.5 | 7.0 | 36 |
| 38 | 10.2 | 10.2 | 10.2 | 10.3 | 10.3 | 10.1 | 10.5 | 10.6 | 10.5 | 10.8 | 10.8 | 10.3 | 10.2 | 6.7 | 38 |
| 40 | 10.0 | 10.0 | 10.0 | 10.1 | 10.1 | 9.9 | 10.4 | 10.4 | 10.4 | 10.6 | 10.6 | 9.9 | 9.9 | 6.5 | 40 |
| 42 | 9.8 | 9.8 | 9.8 | 10.1 | 10.1 | 9.9 | 10.3 | 10.3 | 10.3 | 10.6 | 10.6 | 9.6 | 9.7 | 6.3 | 42 |
| 44 | 9.8 | 9.8 | 9.8 | 9.9 | 9.9 | 9.8 | 10.1 | 10.2 | 10.1 | 10.6 | 10.4 | 9.3 | 9.2 | 6.1 | 44 |
| 46 | 9.6 | 9.6 | 9.6 | 9.9 | 9.9 | 9.8 | 10.0 | 10.1 | 10.0 | 10.4 | 10.4 | 9.0 | 9.0 | 5.8 | 46 |
| 48 | 9.6 | 9.6 | 9.6 | 9.7 | 9.7 | 9.7 | 9.9 | 10.0 | 9.9 | 10.4 | 10.2 | 8.9 | 8.7 | 5.6 | 48 |
| 50 | 9.4 | 9.4 | 9.4 | 9.7 | 9.7 | 9.7 | 9.8 | 9.9 | 9.8 | 9.9 | 9.9 | 8.6 | 8.5 | 5.4 | 50 |
| 52 | 9.4 | 9.4 | 9.4 | 9.5 | 9.5 | 9.6 | 9.8 | 9.8 | 9.8 | 9.7 | 9.5 | 8.5 | 8.3 | 5.3 | 52 |
| 54 | 9.4 | 9.4 | 9.4 | 9.5 | 9.5 | 9.5 | 9.7 | 9.7 | 9.7 | 8.1 | 8.1 | 8.4 | 8.1 | 5.1 | 54 |
| 56 | 9.4 | 9.4 | 9.2 | 9.5 | 9.5 | 9.5 | 9.6 | 9.7 | 9.6 | 7.8 | 7.7 | 8.0 | 7.7 | 4.9 | 56 |
| 58 | 9.2 | 9.2 | 8.1 | 9.5 | 9.2 | 8.5 | 9.6 | 9.3 | 9.0 | 7.7 | 7.3 | 7.9 | 7.7 | 4.7 | 58 |
| 60 | 8.5 | 8.2 | 7.0 | 8.6 | 8.2 | 7.4 | 8.7 | 8.2 | 7.9 | 7.5 | 6.9 | 7.6 | 7.0 | 4.5 | 60 |
| 62 | | | | 7.7 | 7.2 | 6.4 | 7.8 | 7.3 | 7.0 | 7.2 | 6.5 | 7.0 | 6.3 | 4.4 | 62 |
| 64 | | | | 6.7 | 6.2 | 5.5 | 6.9 | 6.4 | 6.1 | 6.9 | 6.2 | 6.3 | 5.6 | 4.3 | 64 |
| 66 | | | | | | | | 6.0 | 5.5 | 5.2 | 6.5 | 5.8 | 5.6 | 4.9 | 66 |
| 68 | | | | | | | | 5.2 | 4.7 | 4.4 | 5.7 | 5.0 | 4.9 | 4.2 | 68 |
| 70 | | | | | | | | | | | 5.0 | 4.2 | 4.1 | 3.5 | 70 |
| 72 | | | | | | | | | | | 4.3 | 3.5 | 3.8 | 3.2 | 72 |
| 74 | | | | | | | | | | | | 3.2 | 2.5 | 2.7 | 74 |
| 76 | | | | | | | | | | | | 3.2 | 2.3 | 2.3 | 76 |
| 78 | | | | | | | | | | | | | | 2.0 | 78 |
| 80 | | | | | | | | | | | | | | | 80 |
| 组合 Code | 121111 | 211111 | 222100 | 122111 | 221111 | 222200 | 122220 | 222111 | 222210 | 122221 | 222211 | 122222 | 222221 | 222222 | 组合 Code |
| 倍率 n | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 倍率 n |

起重性能表

Rated lifting load table




T 53.1~79.5 m

| m | | | | | | | | | | | | | | | m |
|---------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|---------|
| | 53.1 | 53.1 | 53.1 | 58.4 | 58.4 | 58.4 | 63.6 | 63.6 | 63.6 | 68.9 | 68.9 | 74.2 | 74.2 | 79.5 | |
| | 6.5m | | | | | | | | | | | | | | |
| | 40° | | | | | | | | | | | | | | |
| 12 m | | | | | | | | | | | | | | | |
| 18 | 19.2 | 19.2 | 19.2 | 19.2 | 19.2 | 19.3 | | | | | | | | | 18 |
| 20 | 18.8 | 18.8 | 18.8 | 18.9 | 18.8 | 18.9 | 18.4 | 18.7 | 18.7 | | | | | | 20 |
| 22 | 18.4 | 18.4 | 18.4 | 18.5 | 18.4 | 18.5 | 18.2 | 18.3 | 18.3 | 17.9 | 18.2 | | | | 22 |
| 24 | 18.0 | 18.0 | 18.0 | 18.1 | 18.1 | 18.1 | 17.9 | 17.9 | 17.9 | 17.6 | 17.8 | 17.4 | 17.0 | | 24 |
| 26 | 17.6 | 17.6 | 17.7 | 17.7 | 17.7 | 17.7 | 17.5 | 17.5 | 17.6 | 17.6 | 17.4 | 16.8 | 16.5 | | 26 |
| 28 | 17.2 | 17.2 | 17.3 | 17.3 | 17.3 | 17.3 | 17.3 | 17.2 | 17.3 | 17.2 | 17.2 | 15.9 | 16.0 | 12.3 | 28 |
| 30 | 16.9 | 16.9 | 16.9 | 16.9 | 16.9 | 16.9 | 17.1 | 16.9 | 17.0 | 16.8 | 16.9 | 15.2 | 15.5 | 11.3 | 30 |
| 32 | 16.8 | 16.8 | 16.9 | 16.9 | 16.9 | 16.9 | 16.7 | 16.8 | 16.8 | 16.8 | 16.9 | 15.0 | 15.0 | 10.9 | 32 |
| 34 | 16.4 | 16.4 | 16.5 | 16.5 | 16.5 | 16.5 | 16.5 | 16.6 | 16.6 | 16.4 | 16.5 | 14.5 | 14.7 | 10.5 | 34 |
| 36 | 16.1 | 16.1 | 16.1 | 16.1 | 16.3 | 16.3 | 16.3 | 16.3 | 16.3 | 16.2 | 16.2 | 14.1 | 14.2 | 10.1 | 36 |
| 38 | 16.0 | 16.0 | 16.1 | 16.1 | 16.1 | 15.9 | 16.1 | 16.1 | 16.1 | 15.4 | 15.4 | 13.5 | 13.7 | 9.7 | 38 |
| 40 | 15.7 | 15.7 | 15.7 | 15.7 | 15.7 | 15.9 | 15.7 | 15.6 | 15.6 | 14.7 | 14.8 | 13.0 | 13.0 | 9.1 | 40 |
| 42 | 15.7 | 15.7 | 15.7 | 15.4 | 15.4 | 15.4 | 14.9 | 14.9 | 14.9 | 14.2 | 14.1 | 12.0 | 12.3 | 8.7 | 42 |
| 44 | 15.5 | 15.5 | 15.2 | 14.9 | 15.1 | 14.6 | 14.2 | 14.2 | 14.2 | 13.3 | 13.5 | 11.4 | 11.6 | 8.5 | 44 |
| 46 | 15.2 | 15.2 | 13.6 | 13.7 | 13.0 | 13.0 | 13.2 | 12.5 | 12.5 | 12.6 | 11.9 | 10.8 | 11.1 | 8.2 | 46 |
| 48 | 14.2 | 13.6 | 12.6 | 13.2 | 12.8 | 12.4 | 12.7 | 12.3 | 12.0 | 12.0 | 11.3 | 10.5 | 10.5 | 7.9 | 48 |
| 50 | 12.8 | 12.5 | 11.1 | 11.4 | 10.7 | 10.3 | 10.6 | 9.9 | 9.9 | 10.0 | 9.4 | 10.3 | 9.8 | 7.7 | 50 |
| 52 | 11.4 | 11.1 | 9.7 | 10.9 | 10.4 | 9.6 | 9.7 | 9.7 | 9.4 | 9.6 | 8.9 | 9.0 | 8.4 | 7.4 | 52 |
| 54 | 10.2 | 9.9 | 8.5 | 10.3 | 9.8 | 9.0 | 9.6 | 9.2 | 8.9 | 9.1 | 8.4 | 8.5 | 8.4 | 7.2 | 54 |
| 56 | | | | 9.2 | 8.6 | 7.8 | 9.2 | 8.7 | 8.3 | 8.4 | 7.9 | 7.7 | 7.0 | 7.0 | 56 |
| 58 | | | | 8.1 | 7.5 | 6.7 | 8.3 | 7.7 | 7.4 | 8.3 | 7.5 | 7.0 | 6.3 | 6.8 | 58 |
| 60 | | | | | | | 7.3 | 6.7 | 6.4 | 7.7 | 6.9 | 6.3 | 5.6 | 6.3 | 60 |
| 62 | | | | | | | 6.3 | 5.8 | 5.4 | 6.8 | 6.0 | 6.0 | 5.6 | 5.6 | 62 |
| 64 | | | | | | | | | | 6.0 | 5.2 | 5.7 | 4.9 | 4.9 | 64 |
| 66 | | | | | | | | | | 4.8 | 4.0 | 4.9 | 4.2 | 4.2 | 66 |
| 68 | | | | | | | | | | | | 4.3 | 3.5 | 3.9 | 68 |
| 70 | | | | | | | | | | | | 4.0 | 3.4 | 3.3 | 70 |
| 72 | | | | | | | | | | | | | | 2.7 | 72 |
| 74 | | | | | | | | | | | | | | 2.6 | 74 |
| 76 | | | | | | | | | | | | | | | 76 |
| 组合 Code | 121111 | 211111 | 222100 | 122111 | 221111 | 222200 | 122220 | 222111 | 222210 | 122221 | 222211 | 122222 | 222221 | 222222 | 组合 Code |
| 倍率 n | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 1 | 倍率 n |

起重性能表

Rated lifting load table


T 16.1~79.5 m



| | 53.1 | 53.1 | 53.1 | 58.4 | 58.4 | 58.4 | 63.6 | 63.6 | 63.6 | 68.9 | 68.9 | 74.2 | 74.2 | 79.5 | |
|---------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|---------|
| | 6.5m | | | | | | | | | | | | | | |
| | 40° | | | | | | | | | | | | | | |
| | 6 m | | | | | | | | | | | | | | |
| 12 | 25.7 | 25.7 | 25.7 | | | | | | | | | | | | 12 |
| 14 | 25.3 | 25.3 | 25.4 | 25.0 | 25.3 | 25.0 | | | | | | | | | 14 |
| 16 | 24.8 | 24.7 | 24.8 | 24.6 | 24.6 | 24.6 | 24.4 | 24.4 | 24.4 | | | | | | 16 |
| 18 | 24.0 | 24.1 | 24.1 | 24.2 | 24.1 | 24.2 | 24.1 | 24.0 | 24.1 | 23.8 | 23.8 | 23.3 | 23.7 | | 18 |
| 20 | 23.5 | 23.8 | 23.5 | 23.5 | 23.5 | 23.5 | 23.4 | 23.7 | 23.4 | 23.4 | 23.4 | 22.9 | 23.3 | | 20 |
| 22 | 23.2 | 23.2 | 23.3 | 23.1 | 23.1 | 23.1 | 22.9 | 23.0 | 23.2 | 23.0 | 23.0 | 22.6 | 22.9 | 19.0 | 22 |
| 24 | 22.6 | 22.6 | 22.6 | 22.7 | 22.7 | 22.7 | 22.8 | 22.8 | 22.7 | 22.7 | 22.6 | 22.2 | 22.6 | 17.5 | 24 |
| 26 | 22.2 | 22.2 | 22.2 | 22.3 | 22.3 | 22.3 | 22.5 | 22.5 | 22.4 | 22.3 | 22.3 | 21.5 | 21.6 | 16.7 | 26 |
| 28 | 21.9 | 21.9 | 21.9 | 21.9 | 21.9 | 21.9 | 22.2 | 22.1 | 22.2 | 21.9 | 22.0 | 20.2 | 20.2 | 16.0 | 28 |
| 30 | 21.8 | 21.8 | 21.9 | 21.9 | 21.9 | 21.6 | 21.8 | 21.7 | 21.8 | 21.0 | 21.3 | 19.0 | 19.1 | 15.3 | 30 |
| 32 | 21.5 | 21.5 | 21.5 | 21.5 | 21.5 | 21.5 | 21.3 | 21.3 | 21.3 | 20.2 | 20.2 | 18.0 | 18.1 | 14.8 | 32 |
| 34 | 21.3 | 21.3 | 21.3 | 20.8 | 20.8 | 20.8 | 20.1 | 20.1 | 20.1 | 19.2 | 19.2 | 16.9 | 17.0 | 14.3 | 34 |
| 36 | 21.0 | 21.0 | 20.6 | 19.6 | 19.6 | 19.1 | 19.4 | 19.0 | 19.0 | 18.6 | 18.3 | 16.0 | 16.0 | 13.8 | 36 |
| 38 | 19.9 | 19.9 | 18.3 | 19.2 | 18.5 | 17.7 | 18.8 | 18.1 | 18.1 | 18.0 | 17.3 | 15.9 | 15.2 | 13.2 | 38 |
| 40 | 17.4 | 17.4 | 15.9 | 16.9 | 16.1 | 15.4 | 16.4 | 15.7 | 15.7 | 15.7 | 15.0 | 14.6 | 14.0 | 12.8 | 40 |
| 42 | 16.4 | 16.4 | 14.9 | 15.9 | 15.2 | 14.4 | 15.7 | 14.9 | 14.9 | 15.0 | 14.3 | 13.2 | 12.6 | 12.3 | 42 |
| 44 | 14.7 | 14.6 | 13.1 | 14.6 | 13.9 | 13.1 | 14.4 | 13.6 | 13.6 | 13.7 | 13.0 | 12.5 | 11.9 | 11.7 | 44 |
| 46 | 12.7 | 12.5 | 11.0 | 12.8 | 12.6 | 11.7 | 12.5 | 12.4 | 11.7 | 12.6 | 11.9 | 11.1 | 10.5 | 11.1 | 46 |
| 48 | 10.7 | 10.4 | 9.0 | 11.9 | 11.4 | 10.5 | 12.2 | 11.6 | 11.3 | 12.0 | 11.2 | 11.1 | 9.8 | 9.8 | 48 |
| 50 | | | | 10.6 | 10.1 | 9.2 | 11.2 | 10.6 | 10.2 | 11.6 | 10.6 | 9.0 | 8.4 | 9.1 | 50 |
| 52 | | | | 9.4 | 8.8 | 7.9 | 10.0 | 9.4 | 9.0 | 10.4 | 9.7 | 8.5 | 7.7 | 8.4 | 52 |
| 54 | | | | | | | 8.8 | 8.2 | 7.8 | 9.5 | 8.6 | 7.8 | 7.0 | 7.7 | 54 |
| 56 | | | | | | | 7.8 | 7.1 | 6.7 | 8.4 | 7.5 | 7.1 | 6.3 | 7.0 | 56 |
| 58 | | | | | | | | | | 7.5 | 6.5 | 6.4 | 5.6 | 6.3 | 58 |
| 60 | | | | | | | | | | 6.5 | 5.6 | 5.7 | 4.9 | 5.6 | 60 |
| 62 | | | | | | | | | | | | 5.0 | 4.2 | 4.9 | 62 |
| 64 | | | | | | | | | | | | 4.9 | 4.0 | 4.2 | 64 |
| 66 | | | | | | | | | | | | | | 3.5 | 66 |
| 68 | | | | | | | | | | | | | | 3.3 | 68 |
| 70 | | | | | | | | | | | | | | | 70 |
| 72 | | | | | | | | | | | | | | | 72 |
| 组合 Code | 121111 | 211111 | 222100 | 122111 | 221111 | 222200 | 122220 | 222111 | 222210 | 122221 | 222211 | 122222 | 222221 | 222222 | 组合 Code |
| 倍率 n | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 倍率 n |

起升高度曲线图 Lifting height chart

主臂+超起+副臂
Boom+ Super lifting device + Jib

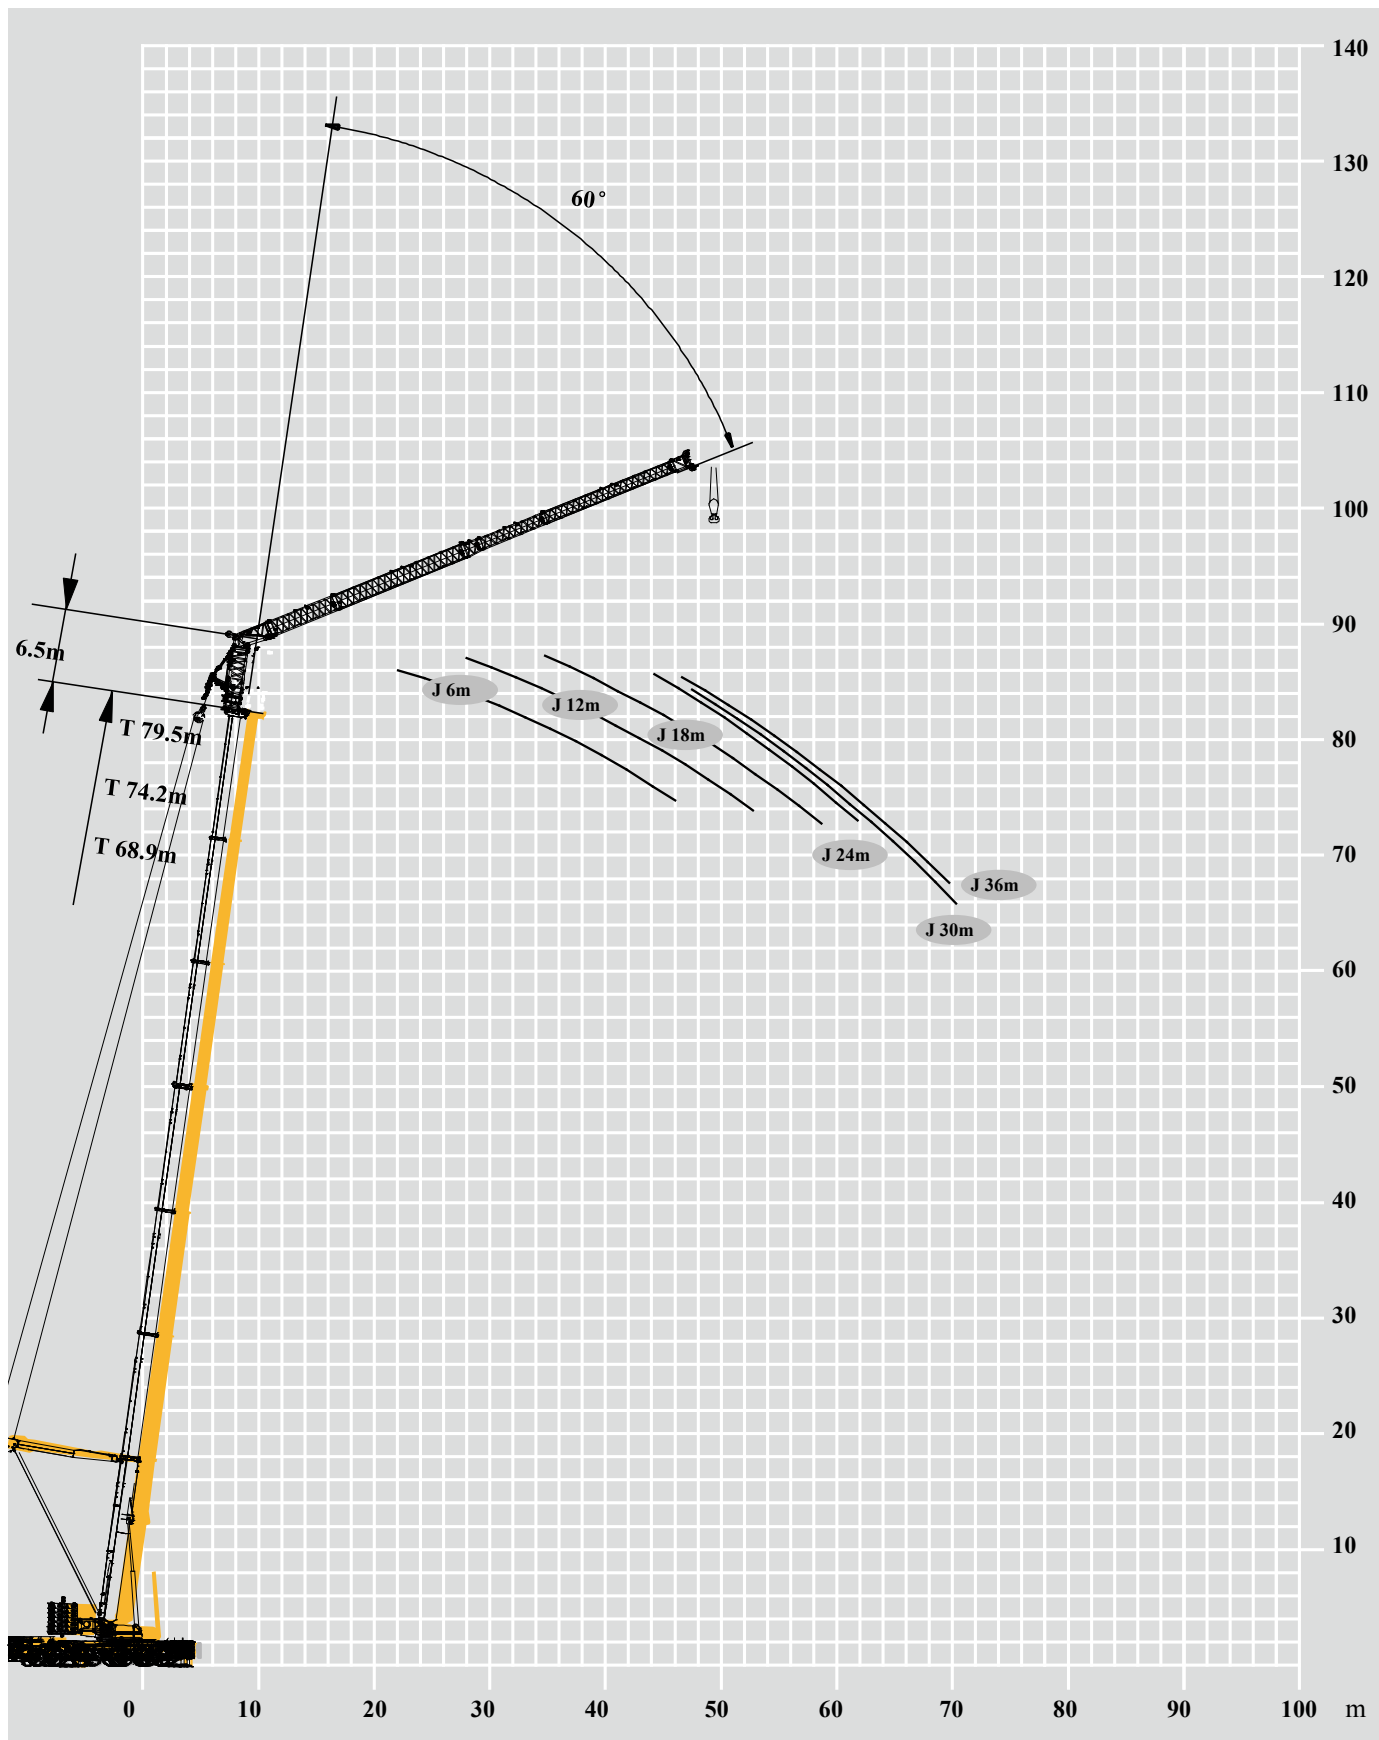

起重性能表

Rated lifting load table

T 53.1~68.9 m

| | 53.1 | 53.1 | 53.1 | 58.4 | 58.4 | 58.4 | 63.6 | 63.6 | 63.6 | 68.9 | 68.9 | |
|---------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|---------|
| | 6.5m | | | | | | | | | | | |
| | 60° | | | | | | | | | | | |
| | 36 m | | | | | | | | | | | |
| 44 | 3.5 | 3.5 | 3.5 | 3.5 | 3.5 | 3.5 | | | | | | 44 |
| 46 | 3.4 | 3.4 | 3.4 | 3.4 | 3.4 | 3.4 | 3.5 | 3.5 | 3.5 | | | 46 |
| 48 | 3.4 | 3.4 | 3.4 | 3.4 | 3.4 | 3.4 | 3.5 | 3.5 | 3.5 | 3.6 | 3.5 | 48 |
| 50 | 3.4 | 3.4 | 3.4 | 3.4 | 3.4 | 3.4 | 3.4 | 3.4 | 3.4 | 3.6 | 3.5 | 50 |
| 52 | 3.4 | 3.4 | 3.3 | 3.4 | 3.4 | 3.4 | 3.4 | 3.4 | 3.4 | 3.5 | 3.5 | 52 |
| 54 | 3.3 | 3.3 | 3.3 | 3.4 | 3.4 | 3.4 | 3.4 | 3.4 | 3.4 | 3.5 | 3.4 | 54 |
| 56 | 3.3 | 3.3 | 3.3 | 3.3 | 3.3 | 3.3 | 3.4 | 3.4 | 3.4 | 3.5 | 3.4 | 56 |
| 58 | 3.3 | 3.3 | 3.3 | 3.3 | 3.3 | 3.3 | 3.4 | 3.4 | 3.4 | 3.5 | 3.4 | 58 |
| 60 | 3.3 | 3.3 | 3.3 | 3.3 | 3.3 | 3.3 | 3.4 | 3.4 | 3.4 | 3.5 | 3.4 | 60 |
| 62 | 3.3 | 3.3 | 3.3 | 3.3 | 3.3 | 3.3 | 3.4 | 3.4 | 3.4 | 3.5 | 3.4 | 62 |
| 64 | | | | 3.3 | 3.3 | 3.3 | 3.4 | 3.4 | 3.4 | 3.5 | 3.4 | 64 |
| 66 | | | | 3.3 | 3.3 | 3.3 | 3.4 | 3.4 | 3.4 | 3.5 | 3.4 | 66 |
| 68 | | | | | | | 3.4 | 3.4 | 3.4 | 3.5 | 3.4 | 68 |
| 70 | | | | | | | | | | 3.4 | 3.4 | 70 |
| 72 | | | | | | | | | | | | 72 |
| 74 | | | | | | | | | | | | 74 |
| 组合 Code | 121111 | 211111 | 222100 | 122111 | 221111 | 222200 | 122220 | 222111 | 222210 | 122221 | 222211 | 组合 Code |
| 倍率 n | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 倍率 n |

起重性能表

Rated lifting load table

T 53.1~74.2 m

| | 53.1 | 53.1 | 53.1 | 58.4 | 58.4 | 58.4 | 63.6 | 63.6 | 63.6 | 68.9 | 68.9 | 74.2 | 74.2 | |
|---------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|---------|
| | 6.5m | | | | | | | | | | | | | |
| | 60° | | | | | | | | | | | | | |
| 30 m | | | | | | | | | | | | | | |
| 38 | 4.7 | 4.7 | 4.7 | 4.7 | 4.7 | 4.7 | | | | | | | | 38 |
| 40 | 4.7 | 4.7 | 4.6 | 4.7 | 4.7 | 4.7 | 4.8 | 4.7 | 4.7 | | | | | 40 |
| 42 | 4.6 | 4.6 | 4.6 | 4.6 | 4.6 | 4.6 | 4.7 | 4.7 | 4.7 | 4.8 | 4.7 | | | 42 |
| 44 | 4.6 | 4.6 | 4.6 | 4.6 | 4.6 | 4.6 | 4.7 | 4.6 | 4.6 | 4.7 | 4.7 | 5.0 | 4.9 | 44 |
| 46 | 4.6 | 4.5 | 4.5 | 4.6 | 4.6 | 4.6 | 4.6 | 4.6 | 4.6 | 4.7 | 4.7 | 4.9 | 4.8 | 46 |
| 48 | 4.5 | 4.5 | 4.5 | 4.6 | 4.6 | 4.5 | 4.6 | 4.6 | 4.6 | 4.7 | 4.6 | 4.9 | 4.8 | 48 |
| 50 | 4.5 | 4.5 | 4.5 | 4.5 | 4.5 | 4.5 | 4.6 | 4.6 | 4.6 | 4.6 | 4.6 | 4.9 | 4.8 | 50 |
| 52 | 4.5 | 4.5 | 4.5 | 4.5 | 4.5 | 4.5 | 4.6 | 4.6 | 4.6 | 4.6 | 4.6 | 3.1 | 4.2 | 52 |
| 54 | 4.5 | 4.5 | 4.5 | 4.5 | 4.5 | 4.5 | 4.6 | 4.6 | 4.6 | 4.6 | 4.6 | 3.1 | 4.2 | 54 |
| 56 | 4.5 | 4.5 | 4.5 | 4.5 | 4.5 | 4.5 | 4.6 | 4.6 | 4.6 | 4.6 | 4.6 | 3.1 | 4.2 | 56 |
| 58 | | | | 4.5 | 4.5 | 4.5 | 4.6 | 4.6 | 4.6 | 4.6 | 4.6 | 3.1 | 3.8 | 58 |
| 60 | | | | 4.5 | 4.5 | 4.5 | 4.6 | 4.6 | 4.6 | 4.6 | 4.6 | 2.4 | 3.3 | 60 |
| 62 | | | | | | | 4.6 | 4.6 | 4.6 | 4.6 | 4.6 | 2.4 | 2.8 | 62 |
| 64 | | | | | | | | | | 4.6 | 4.6 | 2.3 | 2.8 | 64 |
| 66 | | | | | | | | | | | | 2.3 | 2.3 | 66 |
| 68 | | | | | | | | | | | | 2.3 | 2.3 | 68 |
| 70 | | | | | | | | | | | | | | 70 |
| 组合 Code | 121111 | 211111 | 222100 | 122111 | 221111 | 222200 | 122220 | 222111 | 222210 | 122221 | 222211 | 122222 | 222221 | 组合 Code |
| 倍率 n | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 倍率 n |

起重性能表

Rated lifting load table

T 53.1~79.5 m

| | 53.1 | 53.1 | 53.1 | 58.4 | 58.4 | 58.4 | 63.6 | 63.6 | 63.6 | 68.9 | 68.9 | 74.2 | 74.2 | 79.5 | |
|---------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|---------|
| | 6.5m | | | | | | | | | | | | | | |
| | 60° | | | | | | | | | | | | | | |
| | 24 m | | | | | | | | | | | | | | |
| 32 | 7.0 | 7.0 | 7.0 | 7.2 | 7.2 | 7.1 | | | | | | | | 32 | |
| 34 | 7.0 | 7.0 | 7.0 | 7.0 | 7.0 | 7.1 | 7.3 | 7.2 | 7.1 | | | | | 34 | |
| 36 | 7.0 | 7.0 | 7.0 | 7.0 | 7.0 | 6.9 | 7.1 | 7.0 | 7.0 | 7.2 | 7.2 | | | 36 | |
| 38 | 6.8 | 6.8 | 6.8 | 7.0 | 7.0 | 6.9 | 7.0 | 7.0 | 7.0 | 7.2 | 7.1 | 6.8 | 6.7 | 38 | |
| 40 | 6.8 | 6.8 | 6.8 | 6.9 | 6.9 | 6.9 | 7.0 | 7.0 | 7.0 | 7.1 | 7.0 | 5.9 | 5.8 | 3.6 | 40 |
| 42 | 6.8 | 6.8 | 6.8 | 6.9 | 6.9 | 6.9 | 6.9 | 6.9 | 6.9 | 7.1 | 7.0 | 5.9 | 5.8 | 3.6 | 42 |
| 44 | 6.8 | 6.8 | 6.8 | 6.9 | 6.9 | 6.9 | 6.9 | 6.9 | 6.9 | 7.1 | 7.0 | 5.9 | 5.8 | 3.6 | 44 |
| 46 | 6.8 | 6.8 | 6.8 | 6.9 | 6.9 | 6.9 | 6.9 | 6.9 | 6.9 | 7.0 | 7.0 | 5.9 | 5.8 | 3.6 | 46 |
| 48 | 6.8 | 6.8 | 6.8 | 6.9 | 6.9 | 6.9 | 6.9 | 6.9 | 6.9 | 7.0 | 7.0 | 5.9 | 5.8 | 3.6 | 48 |
| 50 | 6.8 | 6.8 | 6.8 | 6.9 | 6.9 | 6.9 | 6.9 | 6.9 | 6.9 | 7.0 | 7.0 | 5.9 | 5.8 | 3.1 | 50 |
| 52 | | | | 6.9 | 6.9 | 6.9 | 6.9 | 6.9 | 6.9 | 7.0 | 7.0 | 5.9 | 5.8 | 3.1 | 52 |
| 54 | | | | 6.9 | 6.9 | 6.9 | 6.9 | 6.9 | 6.9 | 7.0 | 7.0 | 5.9 | 5.8 | 3.1 | 54 |
| 56 | | | | | | | 6.9 | 6.9 | 6.9 | 6.9 | 7.0 | 5.1 | 5.0 | 3.1 | 56 |
| 58 | | | | | | | | | | 6.9 | 7.0 | 5.1 | 5.0 | 3.1 | 58 |
| 60 | | | | | | | | | | | | 5.1 | 5.0 | 2.6 | 60 |
| 62 | | | | | | | | | | | | 5.1 | 5.0 | | 62 |
| 64 | | | | | | | | | | | | | | | 64 |
| 组合 Code | 121111 | 211111 | 222100 | 122111 | 221111 | 222200 | 122220 | 222111 | 222210 | 122221 | 222211 | 122222 | 222221 | 222222 | 组合 Code |
| 倍率 n | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 倍率 n |

起重性能表

Rated lifting load table

T 53.1~79.5 m

| m | | | | | | | | | | | | | | | |
|---------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|---------|
| 6.5m | | | | | | | | | | | | | | | |
| 60° | | | | | | | | | | | | | | | |
| 18 m | | | | | | | | | | | | | | | |
| 26 | 10.3 | 10.4 | 10.3 | | | | | | | | | | | | 26 |
| 28 | 10.2 | 10.3 | 10.2 | 10.4 | 10.4 | 10.4 | 10.4 | 10.4 | 10.4 | | | | | | 28 |
| 30 | 10.2 | 10.2 | 10.1 | 10.2 | 10.2 | 10.2 | 10.4 | 10.4 | 10.4 | 10.6 | 10.6 | | | | 30 |
| 32 | 10.1 | 10.1 | 10.0 | 10.2 | 10.2 | 10.2 | 10.2 | 10.2 | 10.2 | 10.5 | 10.5 | 9.3 | 9.7 | | 32 |
| 34 | 10.0 | 10.0 | 10.0 | 10.2 | 10.2 | 10.0 | 10.2 | 10.2 | 10.2 | 10.4 | 10.4 | 9.2 | 9.7 | 6.7 | 34 |
| 36 | 10.0 | 10.0 | 10.0 | 10.0 | 10.0 | 10.0 | 10.2 | 10.2 | 10.2 | 10.4 | 10.4 | 9.1 | 9.7 | 6.7 | 36 |
| 38 | 10.0 | 10.0 | 10.0 | 10.0 | 10.0 | 10.0 | 10.2 | 10.2 | 10.2 | 10.4 | 10.3 | 9.1 | 9.6 | 6.7 | 38 |
| 40 | 10.0 | 10.0 | 10.0 | 10.0 | 10.0 | 10.0 | 10.2 | 10.2 | 10.2 | 10.4 | 10.2 | 9.1 | 9.5 | 6.7 | 40 |
| 42 | 10.0 | 10.0 | 10.0 | 10.0 | 10.0 | 10.0 | 10.2 | 10.2 | 10.2 | 10.4 | 10.0 | 9.1 | 9.5 | 6.6 | 42 |
| 44 | 10.0 | 10.0 | 10.0 | 10.0 | 10.0 | 10.0 | 10.2 | 10.2 | 10.2 | 10.4 | 10.0 | 9.0 | 8.4 | 5.7 | 44 |
| 46 | | | | 10.0 | 10.0 | 10.0 | 10.2 | 10.2 | 10.2 | 10.3 | 10.0 | 9.0 | 8.4 | 5.7 | 46 |
| 48 | | | | 9.9 | 10.0 | 10.0 | 10.2 | 10.2 | 10.2 | 10.3 | 10.0 | 9.0 | 8.4 | 5.6 | 48 |
| 50 | | | | | | | 10.2 | 10.2 | 10.2 | 10.3 | 10.0 | 9.0 | 8.0 | 5.5 | 50 |
| 52 | | | | | | | | | | 10.3 | 9.9 | 9.0 | 8.0 | 5.5 | 52 |
| 54 | | | | | | | | | | | | 9.0 | 7.9 | 5.4 | 54 |
| 56 | | | | | | | | | | | | 8.9 | 7.9 | 5.3 | 56 |
| 58 | | | | | | | | | | | | | | 5.2 | 58 |
| 60 | | | | | | | | | | | | | | | 60 |
| 62 | | | | | | | | | | | | | | | 62 |
| 组合 Code | 121111 | 211111 | 222100 | 122111 | 221111 | 222200 | 122220 | 222111 | 222210 | 122221 | 222211 | 122222 | 222221 | 222222 | 组合 Code |
| 倍率 n | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 倍率 n |

起重性能表

T 53.1~79.5 m

Rated lifting load table



| m | 53.1 | 53.1 | 53.1 | 58.4 | 58.4 | 58.4 | 63.6 | 63.6 | 63.6 | 68.9 | 68.9 | 74.2 | 74.2 | 79.5 | m |
|---------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|---------|
| | 6.5m | | | | | | | | | | | | | | |
| | 60° | | | | | | | | | | | | | | |
| | 12 m | | | | | | | | | | | | | | |
| 20 | 15.9 | 15.9 | 15.9 | | | | | | | | | | | | 20 |
| 22 | 15.8 | 15.8 | 15.8 | 12.4 | 12.4 | 12.4 | 12.5 | 12.4 | 12.5 | | | | | | 22 |
| 24 | 15.7 | 15.7 | 15.7 | 12.4 | 12.4 | 12.4 | 12.3 | 12.3 | 12.3 | 12.3 | 12.3 | | | | 24 |
| 26 | 15.5 | 15.5 | 15.5 | 12.3 | 12.3 | 12.3 | 12.3 | 12.3 | 12.3 | 12.2 | 12.2 | 12.1 | 12.1 | | 26 |
| 28 | 15.3 | 15.3 | 15.3 | 12.3 | 12.3 | 12.3 | 12.2 | 12.1 | 12.2 | 12.1 | 12.1 | 12.1 | 12.1 | 10.6 | 28 |
| 30 | 15.3 | 15.3 | 15.3 | 12.1 | 12.1 | 12.1 | 12.1 | 12.1 | 12.1 | 12.0 | 12.0 | 12.0 | 12.1 | 10.4 | 30 |
| 32 | 15.3 | 15.3 | 15.3 | 12.1 | 12.1 | 12.1 | 12.0 | 12.0 | 12.0 | 11.9 | 11.9 | 11.9 | 12.0 | 10.3 | 32 |
| 34 | 15.3 | 15.3 | 15.3 | 12.1 | 12.1 | 12.1 | 12.0 | 12.0 | 12.0 | 11.9 | 11.9 | 11.9 | 11.9 | 10.1 | 34 |
| 36 | 15.3 | 15.3 | 15.3 | 12.1 | 12.1 | 12.1 | 12.0 | 12.0 | 12.0 | 11.9 | 11.9 | 11.9 | 11.9 | 9.6 | 36 |
| 38 | 15.3 | 15.3 | 15.3 | 12.1 | 12.1 | 12.0 | 12.0 | 12.0 | 12.0 | 11.9 | 11.9 | 11.9 | 11.9 | 9.5 | 38 |
| 40 | | | | 12.0 | 12.0 | 12.0 | 12.0 | 12.0 | 12.0 | 11.9 | 11.9 | 11.9 | 11.9 | 8.9 | 40 |
| 42 | | | | 12.0 | 12.0 | 12.0 | 12.0 | 12.0 | 12.0 | 11.8 | 11.8 | 11.9 | 11.9 | 8.5 | 42 |
| 44 | | | | | | | 12.0 | 12.0 | 12.0 | 11.8 | 11.8 | 11.9 | 11.9 | 8.2 | 44 |
| 46 | | | | | | | | | | 11.8 | 11.8 | 11.9 | 11.9 | 7.9 | 46 |
| 48 | | | | | | | | | | | | 11.5 | 10.9 | 7.6 | 48 |
| 50 | | | | | | | | | | | | 10.9 | 10.2 | 7.4 | 50 |
| 52 | | | | | | | | | | | | | | 7.1 | 52 |
| 54 | | | | | | | | | | | | | | | 54 |
| 56 | | | | | | | | | | | | | | | 56 |
| 组合 Code | 121111 | 211111 | 222100 | 122111 | 221111 | 222200 | 122220 | 222111 | 222210 | 122221 | 222211 | 122222 | 222221 | 222222 | 组合 Code |
| 倍率 n | 2 | 2 | 2 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 倍率 n |

起重性能表


Rated lifting load table

T 53.1~79.5 m

| | 53.1 | 53.1 | 53.1 | 58.4 | 58.4 | 58.4 | 63.6 | 63.6 | 63.6 | 68.9 | 68.9 | 74.2 | 74.2 | 79.5 | |
|---------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|---------|
| | 6.5m | | | | | | | | | | | | | | |
| | 60° | | | | | | | | | | | | | | |
| | 6 m | | | | | | | | | | | | | | |
| 14 | 17.3 | 16.9 | 17.3 | | | | | | | | | | | | 14 |
| 16 | 17.0 | 16.9 | 17.0 | 16.9 | 16.9 | 16.9 | 16.9 | 16.8 | 16.9 | | | | | | 16 |
| 18 | 16.8 | 16.8 | 16.8 | 16.8 | 16.8 | 16.8 | 16.6 | 16.6 | 16.6 | 16.3 | 16.3 | | | | 18 |
| 20 | 16.7 | 16.6 | 16.7 | 16.6 | 16.6 | 16.6 | 16.6 | 16.6 | 16.6 | 16.3 | 16.3 | 16.2 | 16.2 | | 20 |
| 22 | 16.5 | 16.6 | 16.5 | 16.5 | 16.5 | 16.5 | 16.3 | 16.3 | 16.3 | 16.3 | 16.3 | 16.0 | 16.0 | 16.0 | 22 |
| 24 | 16.5 | 16.6 | 16.5 | 16.2 | 16.2 | 16.2 | 16.2 | 16.2 | 16.2 | 16.1 | 16.1 | 16.0 | 16.0 | 16.0 | 24 |
| 26 | 16.5 | 16.5 | 16.5 | 16.2 | 16.2 | 16.2 | 16.2 | 16.2 | 16.2 | 16.0 | 16.0 | 16.0 | 16.0 | 15.9 | 26 |
| 28 | 16.5 | 16.3 | 16.5 | 16.2 | 16.2 | 16.2 | 16.2 | 16.2 | 16.2 | 16.0 | 16.0 | 16.0 | 16.0 | 15.7 | 28 |
| 30 | 16.5 | 16.3 | 16.5 | 16.2 | 16.2 | 16.2 | 16.0 | 16.2 | 16.0 | 16.0 | 16.0 | 15.7 | 16.0 | 15.7 | 30 |
| 32 | 16.5 | 16.3 | 16.5 | 16.2 | 16.2 | 16.2 | 15.9 | 16.0 | 15.9 | 16.0 | 16.0 | 15.6 | 15.7 | 15.7 | 32 |
| 34 | | | | 16.2 | 16.2 | 16.2 | 15.9 | 15.9 | 15.9 | 16.0 | 16.0 | 15.6 | 15.6 | 15.7 | 34 |
| 36 | | | | 16.2 | 16.2 | 16.2 | 15.9 | 15.9 | 15.9 | 16.0 | 16.0 | 15.6 | 15.6 | 15.7 | 36 |
| 38 | | | | | | | 15.2 | 15.4 | 15.4 | 16.0 | 15.4 | 15.6 | 15.6 | 15.7 | 38 |
| 40 | | | | | | | | | | 14.7 | 14.1 | 14.7 | 14.1 | 14.7 | 40 |
| 42 | | | | | | | | | | | | 13.4 | 12.8 | 13.4 | 42 |
| 44 | | | | | | | | | | | | 12.8 | 12.2 | 12.2 | 44 |
| 46 | | | | | | | | | | | | | | 11.5 | 46 |
| 48 | | | | | | | | | | | | | | | 48 |
| 50 | | | | | | | | | | | | | | | 50 |
| 组合 Code | 121111 | 211111 | 222100 | 122111 | 221111 | 222200 | 122220 | 222111 | 222210 | 122221 | 222211 | 122222 | 222221 | 222222 | 组合 Code |
| 倍率 n | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 倍率 n |

起升高度曲线图
Lifting height chart


主臂+超起+变幅副臂
Boom+ Super lifting device + Luffing jib

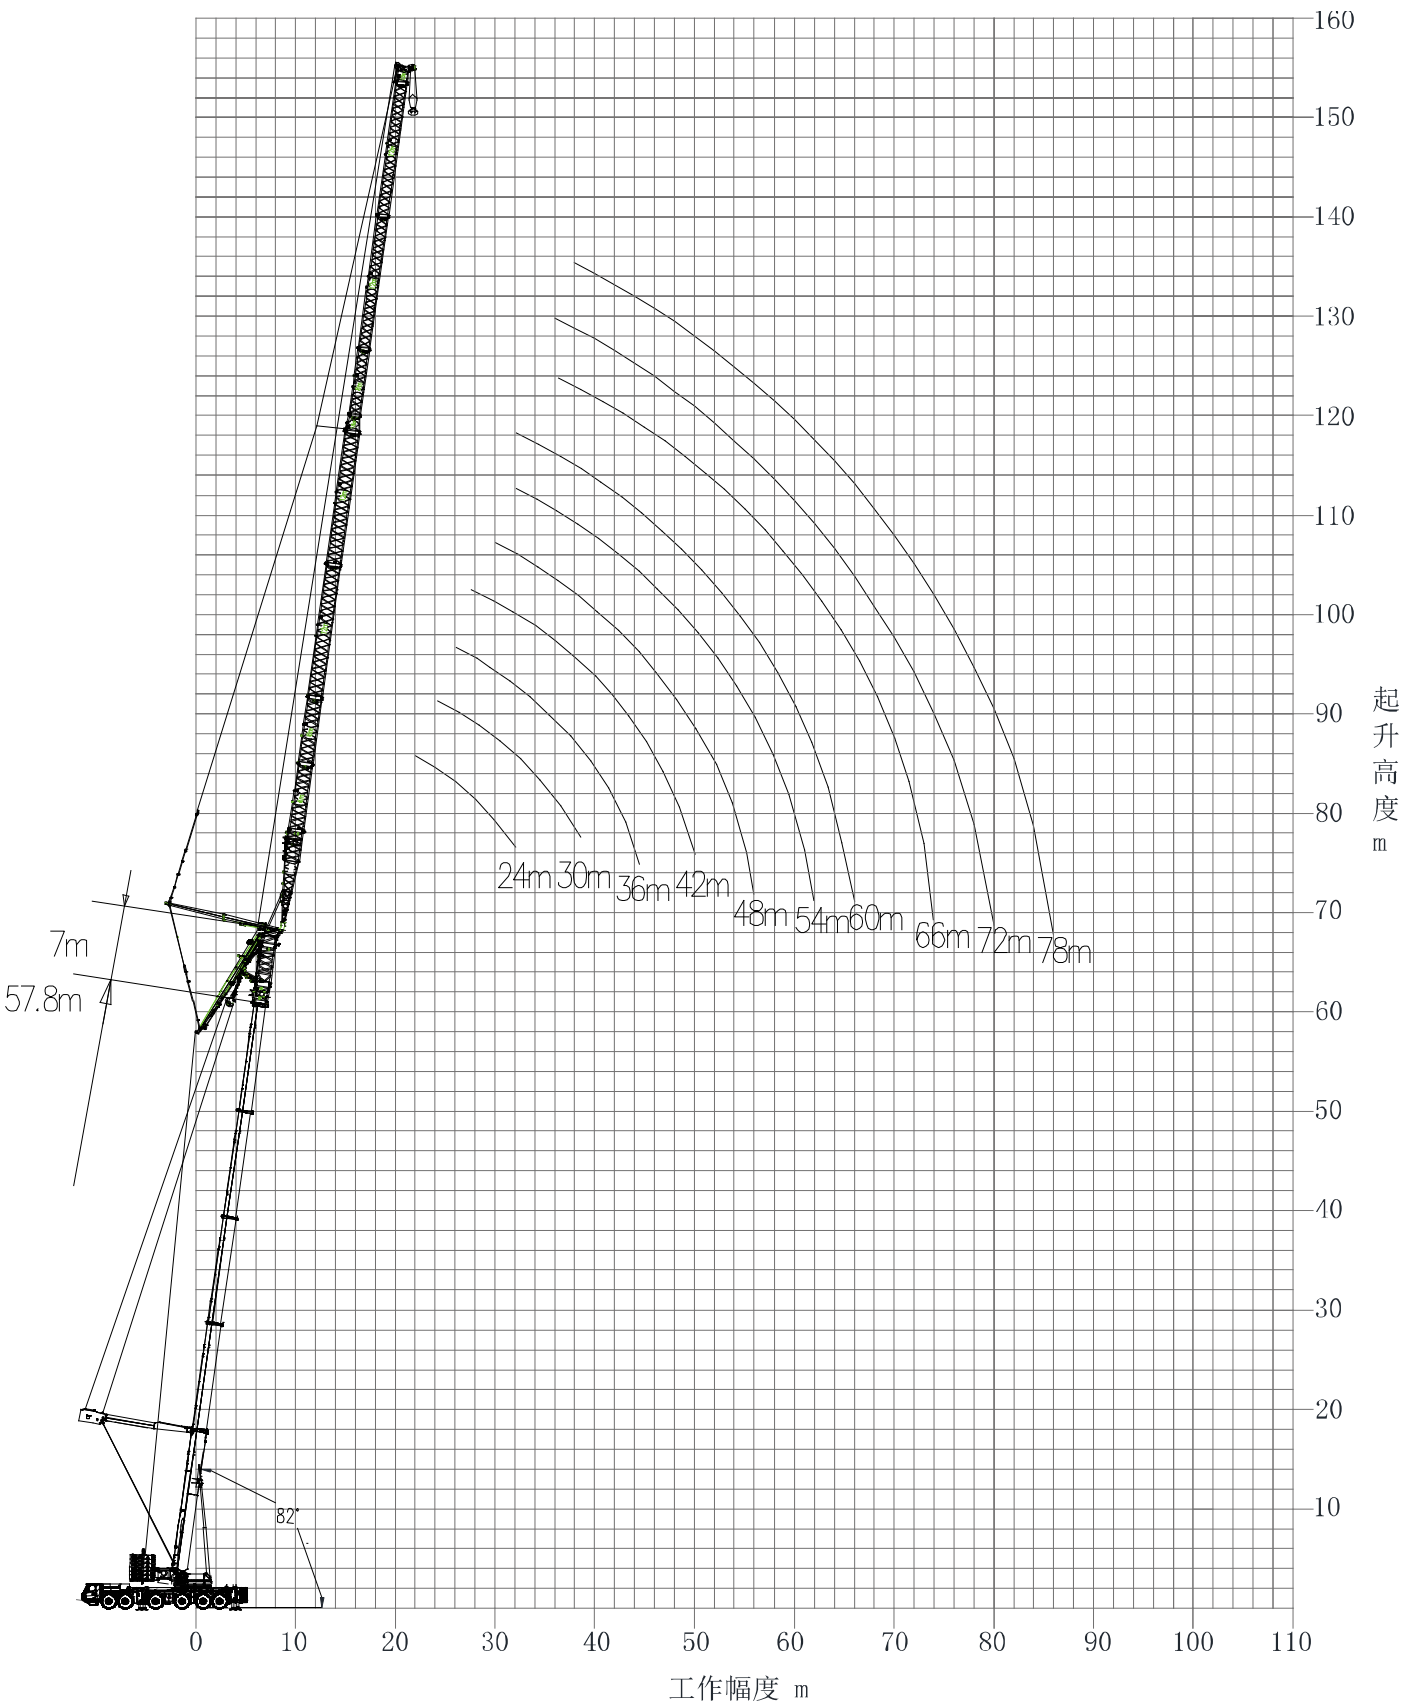


起重性能表

Lifting capacities

T 31.4~57.8m



| m | 24m | | | | | | m |
|--------------------------------|-----------|-----------|-----------|-----------|-----------|-----------|--------------------------------|
| | 31.4+7 | 36.7+7 | 42+7 | 47.3+7 | 52.6+7 | 57.8+7 | |
| 14 | 70.0 | | | | | | 14 |
| 16 | 64.6 | 64.0 | 60.7 | | | | 16 |
| 18 | 59.2 | 58.4 | 57.6 | 56.0 | | | 18 |
| 20 | 54.4 | 53.6 | 52.8 | 52.0 | 46.7 | | 20 |
| 22 | 50.4 | 49.6 | 48.8 | 48.0 | 45.1 | 41.6 | 22 |
| 24 | 46.4 | 46.4 | 45.6 | 44.8 | 43.1 | 39.2 | 24 |
| 26 | 43.2 | 43.2 | 42.4 | 41.6 | 40.3 | 37.5 | 26 |
| 28 | 40.8 | 39.0 | 40.0 | 39.2 | 38.4 | 35.2 | 28 |
| 30 | | | 37.6 | 36.8 | 36.0 | 33.4 | 30 |
| 32 | | | | | | 30.6 | 32 |
| 组合 Code 倍率 Parts of line | 1110 6 | 1111 5 | 2111 5 | 2211 5 | 2221 4 | 2222 4 | 组合 Code 倍率 Parts of line |



| m | 30m | | | | | | m |
|--------------------------------|-----------|-----------|-----------|-----------|-----------|-----------|--------------------------------|
| | 31.4+7 | 36.7+7 | 42+7 | 47.3+7 | 52.6+7 | 57.8+7 | |
| 16 | 57.4 | | | | | | 16 |
| 18 | 54.2 | 51.0 | 50.6 | | | | 18 |
| 20 | 51.0 | 49.4 | 49.1 | 47.8 | | | 20 |
| 22 | 48.3 | 47.9 | 47.6 | 46.3 | 43.2 | | 22 |
| 24 | 45.6 | 45.6 | 44.8 | 44.0 | 41.6 | 38.9 | 24 |
| 26 | 42.9 | 42.4 | 41.6 | 40.8 | 40.1 | 36.5 | 26 |
| 28 | 36.5 | 38.5 | 39.2 | 38.4 | 37.6 | 34.5 | 28 |
| 30 | 34.1 | 36.1 | 36.8 | 36.0 | 36.0 | 32.9 | 30 |
| 32 | 32.5 | 33.1 | 34.4 | 34.4 | 33.6 | 30.1 | 32 |
| 34 | 28.9 | 31.5 | 32.0 | 31.2 | 31.2 | 28.1 | 34 |
| 36 | | | 27.9 | 29.6 | 29.5 | 27.3 | 36 |
| 38 | | | | | | 26.5 | 38 |
| 组合 Code 倍率 Parts of line | 1110 6 | 1111 5 | 2111 5 | 2211 5 | 2221 4 | 2222 4 | 组合 Code 倍率 Parts of line |

起重性能表

Lifting capacities

T 31.4~57.8m









| | | 36m | | | | | | | |
|--------------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|--------------------------------|--|
| | | 31.4+7 | 36.7+7 | 42+7 | 47.3+7 | 52.6+7 | 57.8+7 | | |
| 18 | 49.0 | | | | | | | 18 | |
| 20 | 46.6 | | 44.4 | 44.5 | | | | 20 | |
| 22 | 44.2 | | 42.8 | 43.0 | 42.4 | | | 22 | |
| 24 | 41.7 | | 41.3 | 41.4 | 40.8 | 39.5 | | 24 | |
| 26 | 38.6 | | 39.7 | 39.9 | 39.3 | 37.9 | 35.3 | 26 | |
| 28 | 36.2 | | 37.3 | 38.3 | 37.6 | 36.4 | 33.8 | 28 | |
| 30 | 32.1 | | 34.8 | 36.0 | 36.0 | 34.8 | 31.7 | 30 | |
| 32 | 26.5 | | 32.2 | 33.7 | 33.6 | 32.0 | 27.9 | 32 | |
| 34 | 24.9 | | 27.0 | 29.1 | 31.2 | 29.5 | 26.5 | 34 | |
| 36 | 23.6 | | 25.3 | 26.6 | 28.1 | 28.5 | 25.7 | 36 | |
| 38 | 22.8 | | 23.8 | 24.9 | 26.4 | 26.9 | 24.9 | 38 | |
| 40 | 22.4 | | 22.9 | 23.2 | 24.6 | 26.4 | 24.1 | 40 | |
| 42 | | | | 22.2 | 23.3 | 24.7 | 23.2 | 42 | |
| 44 | | | | | | | 22.8 | 44 | |
| 组合 Code 倍率 Parts of line | 1110 4 | 1111 4 | 2111 4 | 2211 4 | 2221 3 | 2222 3 | 2222 3 | 组合 Code 倍率 Parts of line | |









| | | 42m | | | | | | | |
|--------------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|--------------------------------|--|
| | | 31.4+7 | 36.7+7 | 42+7 | 47.3+7 | 52.6+7 | 57.8+7 | | |
| 20 | 40.1 | | | | | | | 20 | |
| 22 | 40.1 | | 37.8 | 37.2 | | | | 22 | |
| 24 | 36.8 | | 36.7 | 36.9 | | | | 24 | |
| 26 | 33.2 | | 35.2 | 35.6 | 36.3 | 28.5 | | 26 | |
| 28 | 28.7 | | 32.9 | 33.6 | 33.6 | 27.7 | 25.4 | 28 | |
| 30 | 26.5 | | 27.5 | 29.8 | 27.7 | 27.0 | 25.4 | 30 | |
| 32 | 24.9 | | 25.9 | 26.8 | 26.9 | 26.2 | 25.4 | 32 | |
| 34 | 23.2 | | 24.2 | 25.1 | 26.0 | 25.4 | 24.3 | 34 | |
| 36 | 21.6 | | 22.5 | 23.5 | 24.3 | 24.6 | 23.8 | 36 | |
| 38 | 20.2 | | 20.9 | 21.8 | 22.6 | 23.8 | 23.3 | 38 | |
| 40 | 19.1 | | 19.3 | 20.1 | 20.9 | 22.5 | 22.5 | 40 | |
| 42 | 17.8 | | 18.5 | 19.1 | 19.5 | 20.8 | 22.2 | 42 | |
| 44 | 16.9 | | 17.5 | 18.2 | 18.6 | 19.6 | 21.1 | 44 | |
| 46 | 16.0 | | 16.4 | 16.5 | 17.8 | 18.8 | 19.1 | 46 | |
| 48 | | | | 15.8 | 16.9 | 17.0 | 18.1 | 48 | |
| 50 | | | | | | | 17.2 | 50 | |
| 组合 Code 倍率 Parts of line | 1110 4 | 1111 3 | 2111 3 | 2211 3 | 2221 3 | 2222 3 | 2222 2 | 组合 Code 倍率 Parts of line | |

起重性能表

Lifting capacities

T 31.4~57.8m









| | |  |  |  |  |  |  |  |  | | |
|---------------|------|---|---|---|---|---|---|---|--|---------------|--|
| | | 48m | | | | | | | | | |
| | | 31.4+7 | 36.7+7 | 42+7 | 47.3+7 | 52.6+7 | 57.8+7 | | | | |
| 22 | 26.6 | 26.8 | | | | | | | | 22 | |
| 24 | 25.8 | 26.0 | 25.8 | | | | | | | 24 | |
| 26 | 25.0 | 25.2 | 25.0 | 24.7 | | | | | | 26 | |
| 28 | 24.3 | 24.4 | 24.2 | 24.3 | 24.8 | | | | | 28 | |
| 30 | 23.8 | 23.7 | 24.1 | 23.9 | 24.1 | 23.7 | | | | 30 | |
| 32 | 23.2 | 23.7 | 23.5 | 23.6 | 23.3 | 23.0 | | | | 32 | |
| 34 | 23.0 | 22.9 | 23.3 | 23.1 | 22.5 | 22.3 | | | | 34 | |
| 36 | 22.4 | 22.9 | 22.7 | 22.5 | 22.3 | 21.6 | | | | 36 | |
| 38 | 22.0 | 22.1 | 22.2 | 22.3 | 21.8 | 20.9 | | | | 38 | |
| 40 | 20.4 | 21.3 | 21.5 | 21.7 | 21.0 | 20.1 | | | | 40 | |
| 42 | 19.0 | 21.2 | 21.3 | 21.5 | 20.7 | 20.0 | | | | 42 | |
| 44 | 18.1 | 19.5 | 20.7 | 20.8 | 20.7 | 19.3 | | | | 44 | |
| 46 | 17.3 | 18.1 | 19.2 | 20.0 | 20.0 | 18.6 | | | | 46 | |
| 48 | 16.8 | 17.9 | 18.9 | 19.2 | 19.2 | 18.1 | | | | 48 | |
| 50 | 16.4 | 17.1 | 17.4 | 18.4 | 18.4 | 17.6 | | | | 50 | |
| 52 | 16.0 | 16.5 | 17.3 | 17.6 | 16.8 | 16.8 | | | | 52 | |
| 54 | | | 16.5 | 16.8 | 16.8 | 16.0 | | | | 54 | |
| 56 | | | | | | 15.2 | | | | 56 | |
| 组合 Code | 1110 | 1111 | 2111 | 2211 | 2221 | 2222 | | | | 组合 Code | |
| 倍率 | 2 | 2 | 2 | 2 | 2 | 2 | | | | 倍率 | |
| Parts of line | | | | | | | | | | Parts of line | |

| | |  |  |  |  |  |  |  |  | | |
|---------------|------|---|---|---|---|---|---|---|--|---------------|--|
| | | 54m | | | | | | | | | |
| | | 31.4+7 | 36.7+7 | 42+7 | 47.3+7 | 52.6+7 | 57.8+7 | | | | |
| 24 | 21.8 | 22.2 | | | | | | | | 24 | |
| 26 | 21.6 | 21.8 | 21.7 | | | | | | | 26 | |
| 28 | 21.4 | 21.4 | 21.3 | 20.7 | | | | | | 28 | |
| 30 | 21.2 | 21.0 | 21.0 | 20.6 | 20.9 | | | | | 30 | |
| 32 | 20.5 | 20.7 | 20.6 | 20.5 | 20.5 | 19.8 | | | | 32 | |
| 34 | 20.1 | 20.3 | 20.2 | 20.4 | 20.1 | 19.4 | | | | 34 | |
| 36 | 19.7 | 19.9 | 19.8 | 20.0 | 19.8 | 19.0 | | | | 36 | |
| 38 | 19.4 | 19.5 | 19.7 | 19.6 | 19.2 | 18.6 | | | | 38 | |
| 40 | 19.3 | 19.1 | 19.1 | 19.3 | 18.8 | 17.9 | | | | 40 | |
| 42 | 18.6 | 19.1 | 18.9 | 18.9 | 18.6 | 17.7 | | | | 42 | |
| 44 | 18.3 | 18.3 | 18.6 | 18.8 | 18.4 | 17.5 | | | | 44 | |
| 46 | 17.0 | 18.3 | 18.2 | 18.1 | 18.0 | 17.1 | | | | 46 | |
| 48 | 16.6 | 17.4 | 18.1 | 18.1 | 17.6 | 16.9 | | | | 48 | |
| 50 | 15.4 | 16.6 | 17.5 | 17.7 | 17.6 | 16.4 | | | | 50 | |
| 52 | 15.1 | 15.7 | 16.6 | 17.6 | 16.8 | 15.8 | | | | 52 | |
| 54 | 14.2 | 15.1 | 15.8 | 16.7 | 16.0 | 15.7 | | | | 54 | |
| 56 | 13.8 | 14.8 | 14.9 | 15.8 | 16.0 | 15.2 | | | | 56 | |
| 58 | 13.8 | 14.3 | 14.8 | 15.2 | 15.2 | 14.4 | | | | 58 | |
| 60 | | | 14.1 | 14.4 | 14.4 | 14.4 | | | | 60 | |
| 62 | | | | | | 13.6 | | | | 62 | |
| 组合 Code | 1110 | 1111 | 2111 | 2211 | 2221 | 2222 | | | | 组合 Code | |
| 倍率 | 2 | 2 | 2 | 2 | 2 | 2 | | | | 倍率 | |
| Parts of line | | | | | | | | | | Parts of line | |

起重性能表

Lifting capacities









T 31.4~57.8m

| | |  |  |  |  |  |  |  |  | | |
|---------------|------|---|---|---|---|---|---|---|--|----|--|
| | | 60m | | | | | | | | | |
| m | | 31.4+7 | 36.7+7 | 42+7 | 47.3+7 | 52.6+7 | 57.8+7 | m | | | |
| 24 | 18.0 | | | | | | | | | 24 | |
| 26 | 18.0 | | 17.9 | | | | | | | 26 | |
| 28 | 18.0 | | 17.9 | 17.9 | 16.8 | | | | | 28 | |
| 30 | 17.6 | | 17.5 | 17.5 | 16.8 | 16.6 | | | | 30 | |
| 32 | 17.2 | | 17.1 | 17.1 | 16.8 | 16.6 | 15.7 | | | 32 | |
| 34 | 16.9 | | 17.1 | 16.9 | 16.8 | 16.6 | 15.7 | | | 34 | |
| 36 | 16.8 | | 16.7 | 16.6 | 16.7 | 16.6 | 15.7 | | | 36 | |
| 38 | 16.4 | | 16.3 | 16.4 | 16.4 | 16.3 | 15.7 | | | 38 | |
| 40 | 16.1 | | 16.3 | 16.2 | 16.1 | 16.2 | 15.7 | | | 40 | |
| 42 | 16.0 | | 15.9 | 16.0 | 15.8 | 16.0 | 15.7 | | | 42 | |
| 44 | 15.7 | | 15.5 | 15.8 | 15.7 | 15.8 | 15.5 | | | 44 | |
| 46 | 15.6 | | 15.5 | 15.4 | 15.4 | 15.6 | 15.1 | | | 46 | |
| 48 | 15.3 | | 15.1 | 15.2 | 15.3 | 15.4 | 14.9 | | | 48 | |
| 50 | 15.1 | | 15.1 | 15.0 | 15.0 | 15.2 | 14.7 | | | 50 | |
| 52 | 14.5 | | 14.7 | 14.8 | 14.9 | 15.0 | 14.5 | | | 52 | |
| 54 | 14.3 | | 14.7 | 14.8 | 14.6 | 14.8 | 14.3 | | | 54 | |
| 56 | 13.4 | | 14.7 | 14.6 | 14.6 | 14.6 | 14.1 | | | 56 | |
| 58 | 12.9 | | 13.8 | 14.4 | 14.4 | 14.4 | 13.8 | | | 58 | |
| 60 | 12.5 | | 13.1 | 13.8 | 14.2 | 13.6 | 13.6 | | | 60 | |
| 62 | 12.1 | | 12.9 | 12.9 | 13.6 | 13.6 | 12.8 | | | 62 | |
| 64 | 12.1 | | 12.3 | 12.8 | 12.8 | 12.8 | 12.8 | | | 64 | |
| 66 | | | | 12.0 | 12.8 | 12.0 | 12.0 | | | 66 | |
| 68 | | | | | | | 11.2 | | | 68 | |
| 组合 Code | 1110 | 1111 | 2111 | 2211 | 2221 | 2222 | | 组合 Code | | | |
| 倍率 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 倍率 | | | |
| Parts of line | | | | | | | | Parts of line | | | |

起重性能表

Lifting capacities

T 31.4~57.8m

| | |  |  |  |  |  |  |  |  | | |
|---------------|---|---|---|---|---|---|---|---|--|---------------|----|
| | | 66m | | | | | | | | | |
| | | 31.4+7 | 36.7+7 | 42+7 | 47.3+7 | 52.6+7 | 57.8+7 | | | | |
| 26 | m | 15.1 | | | | | | | | | 26 |
| 28 | m | 15.1 | 15.0 | 15.0 | | | | | | | 28 |
| 30 | m | 15.1 | 15.0 | 15.0 | 15.1 | | | | | | 30 |
| 32 | m | 14.9 | 14.8 | 14.8 | 15.1 | 14.0 | | | | | 32 |
| 34 | m | 14.7 | 14.6 | 14.6 | 14.8 | 14.0 | | | | | 34 |
| 36 | m | 14.3 | 14.4 | 14.3 | 14.4 | 14.0 | 13.3 | | | | 36 |
| 38 | m | 14.1 | 14.0 | 14.1 | 14.0 | 14.0 | 13.3 | | | | 38 |
| 40 | m | 13.7 | 14.0 | 13.9 | 13.8 | 13.8 | 13.3 | | | | 40 |
| 42 | m | 13.7 | 13.6 | 13.6 | 13.7 | 13.6 | 13.3 | | | | 42 |
| 44 | m | 13.3 | 13.4 | 13.4 | 13.5 | 13.4 | 13.3 | | | | 44 |
| 46 | m | 13.3 | 13.2 | 13.2 | 13.3 | 13.2 | 13.1 | | | | 46 |
| 48 | m | 12.9 | 13.0 | 13.0 | 13.1 | 13.0 | 12.9 | | | | 48 |
| 50 | m | 12.9 | 12.8 | 12.9 | 12.9 | 12.8 | 12.8 | | | | 50 |
| 52 | m | 12.5 | 12.8 | 12.7 | 12.7 | 12.8 | 12.6 | | | | 52 |
| 54 | m | 12.5 | 12.4 | 12.5 | 12.7 | 12.5 | 12.5 | | | | 54 |
| 56 | m | 12.5 | 12.4 | 12.4 | 12.3 | 12.4 | 12.4 | | | | 56 |
| 58 | m | 12.1 | 12.4 | 12.3 | 12.3 | 12.2 | 12.1 | | | | 58 |
| 60 | m | 12.0 | 12.0 | 12.1 | 12.2 | 12.2 | 12.1 | | | | 60 |
| 62 | m | 11.3 | 12.0 | 11.9 | 11.9 | 12.0 | 12.0 | | | | 62 |
| 64 | m | 11.1 | 12.0 | 11.9 | 11.9 | 12.0 | 11.7 | | | | 64 |
| 66 | m | 10.5 | 11.2 | 11.6 | 11.8 | 11.7 | 11.7 | | | | 66 |
| 68 | m | 10.5 | 11.0 | 11.5 | 11.7 | 11.6 | 11.2 | | | | 68 |
| 70 | m | 10.0 | 10.4 | 10.7 | 11.2 | 11.2 | 11.2 | | | | 70 |
| 72 | m | | | 9.9 | 10.9 | 10.4 | 10.4 | | | | 72 |
| 74 | m | | | | | | 10.4 | | | | 74 |
| 组合 Code | | 1110 | 1111 | 2111 | 2211 | 2221 | 2222 | | | 组合 Code | |
| 倍率 | | 2 | 2 | 2 | 2 | 2 | 1 | | | 倍率 | |
| Parts of line | | | | | | | | | | Parts of line | |

起重性能表

Lifting capacities









T 31.4~57.8m

| | | 72m | | | | | | | |
|---------------|------|--------|--------|------|--------|--------|--------|---------------|--|
| | | 31.4+7 | 36.7+7 | 42+7 | 47.3+7 | 52.6+7 | 57.8+7 | | |
| 28 | 11.2 | | | | | | | 28 | |
| 30 | 11.2 | | 11.1 | 10.5 | | | | 30 | |
| 32 | 11.2 | | 11.1 | 10.5 | 10.2 | | | 32 | |
| 34 | 11.0 | | 10.9 | 10.5 | 10.2 | 8.7 | | 34 | |
| 36 | 10.8 | | 10.8 | 10.5 | 10.2 | 8.7 | 8.3 | 36 | |
| 38 | 10.7 | | 10.6 | 10.5 | 10.2 | 8.7 | 8.3 | 38 | |
| 40 | 10.5 | | 10.4 | 10.4 | 10.2 | 8.7 | 8.3 | 40 | |
| 42 | 10.3 | | 10.3 | 10.3 | 10.2 | 8.6 | 8.3 | 42 | |
| 44 | 10.1 | | 10.2 | 10.2 | 10.1 | 8.5 | 8.2 | 44 | |
| 46 | 10.1 | | 10.1 | 10.1 | 10.0 | 8.5 | 7.9 | 46 | |
| 48 | 10.0 | | 9.9 | 9.9 | 9.9 | 8.4 | 7.8 | 48 | |
| 50 | 9.8 | | 9.7 | 9.8 | 9.7 | 8.2 | 7.8 | 50 | |
| 52 | 9.6 | | 9.7 | 9.6 | 9.7 | 8.1 | 7.8 | 52 | |
| 54 | 9.6 | | 9.4 | 9.4 | 9.4 | 8.0 | 7.8 | 54 | |
| 56 | 9.3 | | 9.4 | 9.3 | 9.4 | 7.9 | 7.7 | 56 | |
| 58 | 9.3 | | 9.2 | 9.2 | 9.2 | 7.9 | 7.7 | 58 | |
| 60 | 9.1 | | 9.2 | 9.2 | 9.2 | 7.8 | 7.7 | 60 | |
| 62 | 9.1 | | 9.0 | 9.1 | 9.0 | 7.7 | 7.5 | 62 | |
| 64 | 9.1 | | 9.0 | 9.0 | 9.0 | 7.6 | 7.5 | 64 | |
| 66 | 8.7 | | 9.0 | 8.9 | 8.8 | 7.6 | 7.3 | 66 | |
| 68 | 8.6 | | 8.7 | 8.8 | 8.8 | 7.5 | 7.1 | 68 | |
| 70 | 8.0 | | 8.3 | 8.3 | 8.8 | 7.5 | 7.0 | 70 | |
| 72 | 7.8 | | 8.0 | 8.1 | 8.4 | 7.3 | 6.8 | 72 | |
| 74 | 7.3 | | 7.8 | 7.8 | 8.0 | 7.2 | 6.7 | 74 | |
| 76 | 7.1 | | 7.3 | 7.4 | 7.8 | 6.6 | 6.7 | 76 | |
| 78 | | | | 7.3 | 7.3 | 6.5 | 6.6 | 78 | |
| 80 | | | | | | | 6.4 | 80 | |
| 组合 Code 倍率 | 1110 | 1111 | 2111 | 2211 | 2221 | 2222 | | 组合 Code 倍率 | |
| Parts of line | 1 | 1 | 1 | 1 | 1 | 1 | 1 | Parts of line | |

起重性能表


Lifting capacities

T 31.4~57.8m

| | |  |  |  |  |  |  |  |  | | |
|---------------|------|---|---|---|---|---|---|---|--|---------------|--|
| | | 78m | | | | | | | | | |
| | | 31.4+7 | 36.7+7 | 42+7 | 47.3+7 | 52.6+7 | 57.8+7 | | | | |
| m | | | | | | | | | m | | |
| 30 | 7.6 | | | | | | | | | 30 | |
| 32 | 7.6 | | 7.8 | | | | | | | 32 | |
| 34 | 7.6 | | 7.8 | 6.1 | 5.9 | | | | | 34 | |
| 36 | 7.6 | | 7.7 | 6.1 | 5.9 | 5.8 | | | | 36 | |
| 38 | 7.6 | | 7.5 | 6.1 | 5.9 | 5.8 | 5.5 | | | 38 | |
| 40 | 7.5 | | 7.5 | 6.1 | 5.9 | 5.8 | 5.5 | | | 40 | |
| 42 | 7.4 | | 7.4 | 6.1 | 5.9 | 5.8 | 5.5 | | | 42 | |
| 44 | 7.3 | | 7.3 | 6.0 | 5.9 | 5.8 | 5.5 | | | 44 | |
| 46 | 7.2 | | 7.2 | 5.9 | 5.9 | 5.8 | 5.5 | | | 46 | |
| 48 | 7.1 | | 7.1 | 5.9 | 5.8 | 5.7 | 5.5 | | | 48 | |
| 50 | 7.0 | | 7.0 | 5.8 | 5.8 | 5.7 | 5.5 | | | 50 | |
| 52 | 6.9 | | 6.9 | 5.8 | 5.7 | 5.7 | 5.4 | | | 52 | |
| 54 | 6.8 | | 6.8 | 5.7 | 5.7 | 5.6 | 5.4 | | | 54 | |
| 56 | 6.7 | | 6.7 | 5.6 | 5.6 | 5.5 | 5.4 | | | 56 | |
| 58 | 6.7 | | 6.7 | 5.5 | 5.5 | 5.5 | 5.4 | | | 58 | |
| 60 | 6.5 | | 6.6 | 5.5 | 5.4 | 5.4 | 5.4 | | | 60 | |
| 62 | 6.5 | | 6.5 | 5.4 | 5.4 | 5.4 | 5.3 | | | 62 | |
| 64 | 6.4 | | 6.4 | 5.4 | 5.4 | 5.4 | 5.3 | | | 64 | |
| 66 | 6.4 | | 6.4 | 5.3 | 5.3 | 5.3 | 5.2 | | | 66 | |
| 68 | 6.4 | | 6.3 | 5.3 | 5.3 | 5.3 | 5.2 | | | 68 | |
| 70 | 6.2 | | 6.3 | 5.3 | 5.2 | 5.2 | 5.1 | | | 70 | |
| 72 | 6.2 | | 6.2 | 5.2 | 5.2 | 5.2 | 5.1 | | | 72 | |
| 74 | 6.2 | | 6.2 | 5.1 | 5.2 | 5.2 | 5.0 | | | 74 | |
| 76 | 6.2 | | 6.2 | 5.1 | 5.2 | 5.1 | 4.9 | | | 76 | |
| 78 | 5.8 | | 5.9 | 5.1 | 5.0 | 5.1 | 4.8 | | | 78 | |
| 80 | 5.6 | | 5.8 | 4.7 | 5.0 | 5.1 | 4.8 | | | 80 | |
| 82 | 5.3 | | 5.3 | 4.6 | 4.8 | 4.9 | 4.8 | | | 82 | |
| 84 | | | | 4.5 | 4.6 | 4.8 | 4.8 | | | 84 | |
| 86 | | | | | | | 4.5 | | | 86 | |
| 组合 Code | 1110 | 1111 | 2111 | 2211 | 2221 | 2222 | 2222 | | | 组合 Code | |
| 倍率 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | | | 倍率 | |
| Parts of line | 1 | 1 | 1 | 1 | 1 | 1 | 1 | | | Parts of line | |

起升高度曲线图
Lifting height chart

主臂+超起+变幅副臂
Boom+ Super lifting device + Luffing jib

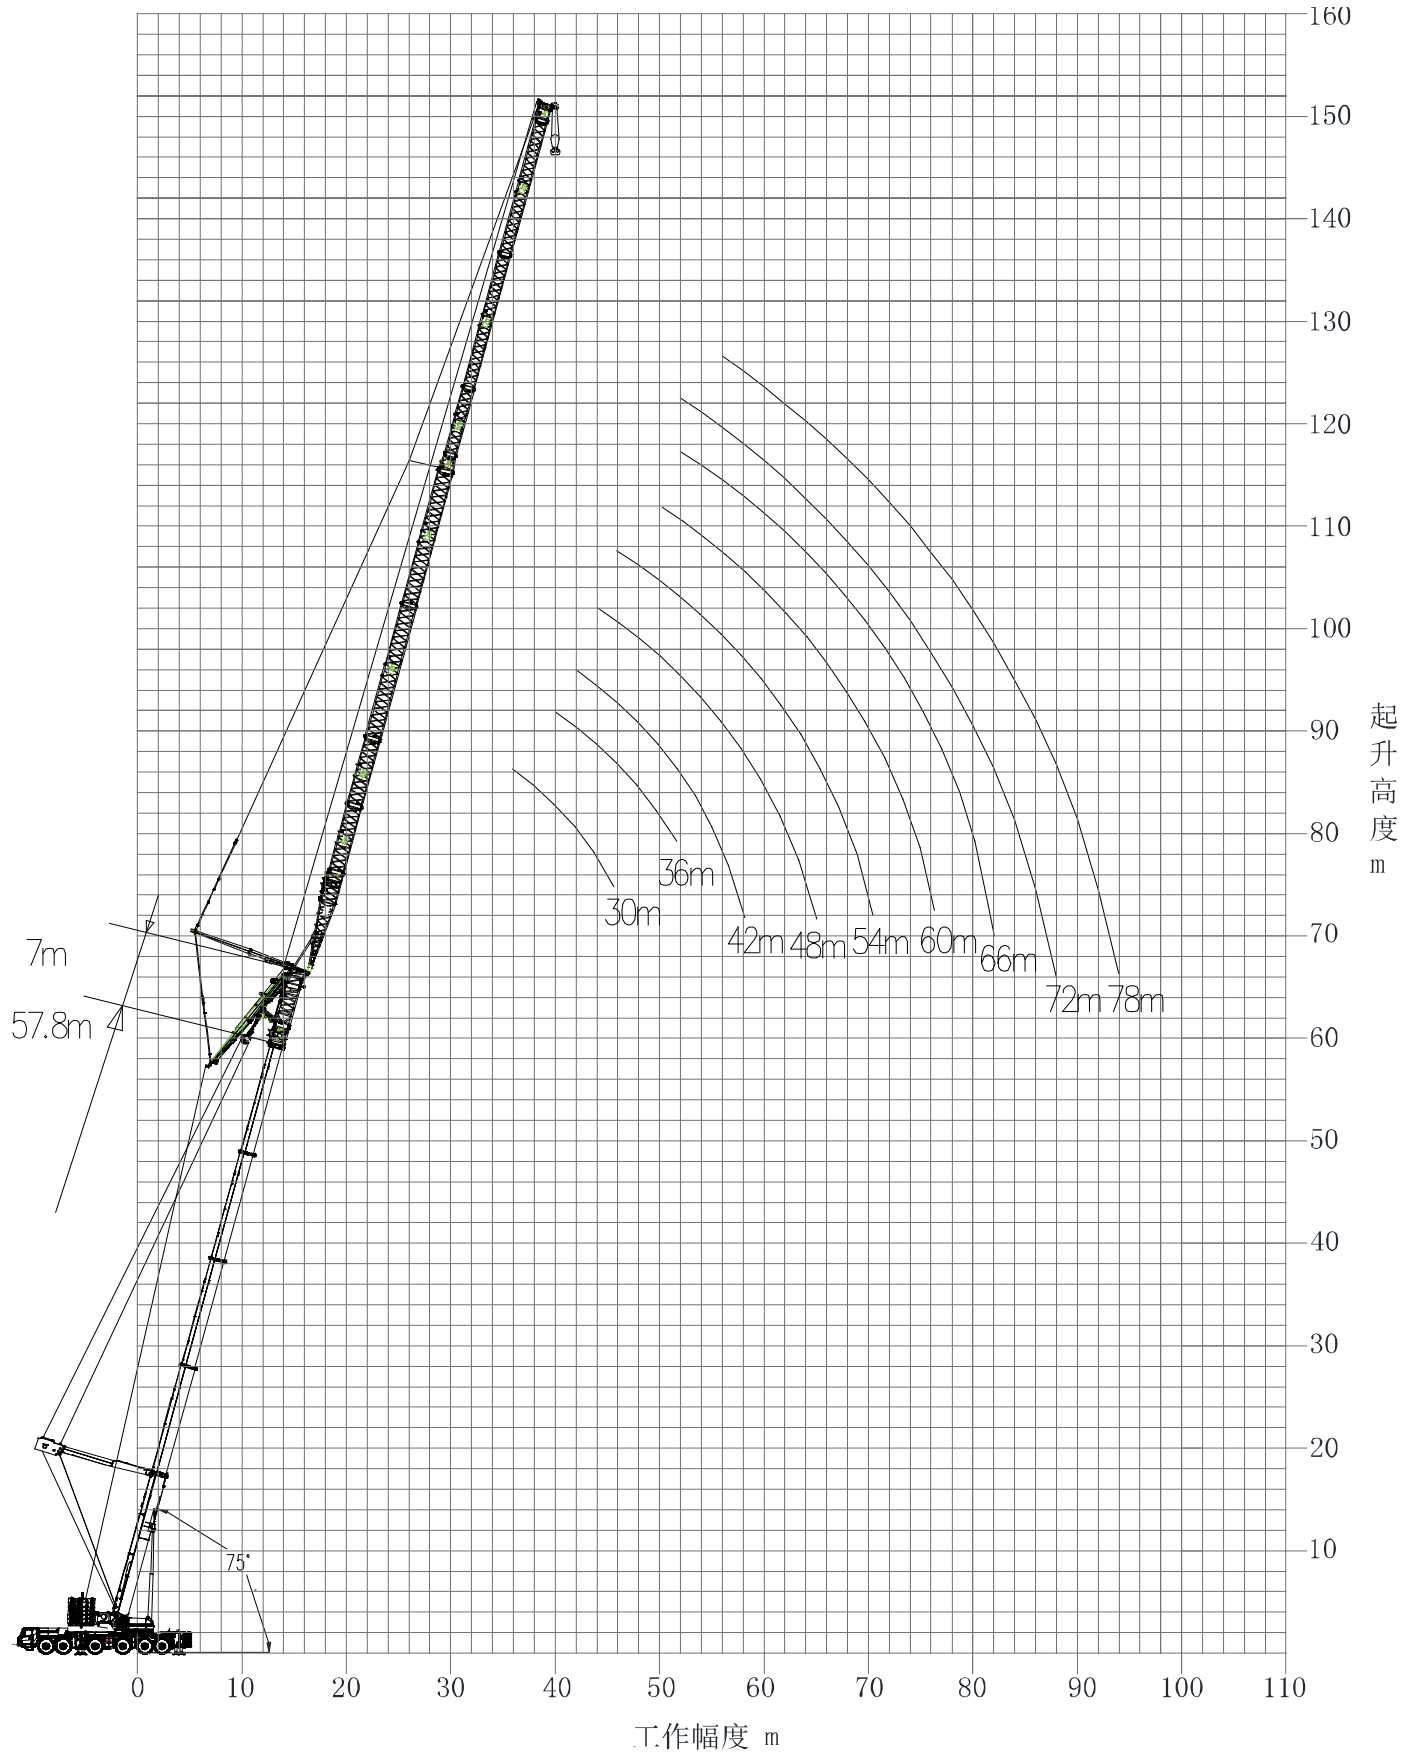

起重性能表

Lifting capacities

T 31.4~57.8m

| 30m | | | | | | | |
|--------------------------------|-----------|-----------|-----------|-----------|-----------|-----------|--------------------------------|
| m | 31.4+7 | 36.7+7 | 42+7 | 47.3+7 | 52.6+7 | 57.8+7 | m |
| 24 | 41.6 | | | | | | 24 |
| 26 | 39.2 | 39.2 | | | | | 26 |
| 28 | 36.8 | 36.0 | 35.2 | | | | 28 |
| 30 | 35.2 | 34.4 | 32.0 | | | | 30 |
| 32 | 32.0 | 31.2 | 30.4 | 29.6 | | | 32 |
| 34 | 30.4 | 29.6 | 28.8 | 28.0 | 27.2 | | 34 |
| 36 | 28.8 | 28.0 | 27.2 | 26.4 | 25.6 | 23.8 | 36 |
| 38 | 27.2 | 27.2 | 25.6 | 24.8 | 24.8 | 23.0 | 38 |
| 40 | | 25.6 | 24.8 | 24.0 | 23.2 | 22.2 | 40 |
| 42 | | | 23.2 | 22.4 | 22.4 | 21.3 | 42 |
| 44 | | | | | 20.8 | 20.5 | 44 |
| 46 | | | | | | 19.9 | 46 |
| 组合 Code 倍率 Parts of line | 1110 4 | 1111 3 | 2111 3 | 2211 3 | 2221 3 | 2222 2 | 组合 Code 倍率 Parts of line |

| 36m | | | | | | | |
|--------------------------------|-----------|-----------|-----------|-----------|-----------|-----------|--------------------------------|
| m | 31.4+7 | 36.7+7 | 42+7 | 47.3+7 | 52.6+7 | 57.8+7 | m |
| 26 | 39.2 | | | | | | 26 |
| 28 | 36.8 | 36.0 | | | | | 28 |
| 30 | 34.4 | 33.6 | | | | | 30 |
| 32 | 31.2 | 31.2 | 29.6 | | | | 32 |
| 34 | 29.6 | 29.6 | 28.0 | 27.2 | | | 34 |
| 36 | 28.0 | 28.0 | 26.4 | 25.6 | 24.8 | | 36 |
| 38 | 27.2 | 26.4 | 25.6 | 24.8 | 24.0 | | 38 |
| 40 | 25.6 | 24.8 | 24.0 | 23.2 | 22.4 | 21.6 | 40 |
| 42 | 24.0 | 24.0 | 23.2 | 22.4 | 21.6 | 20.5 | 42 |
| 44 | 22.7 | 22.4 | 21.6 | 21.6 | 20.8 | 19.8 | 44 |
| 46 | | 21.6 | 20.8 | 20.0 | 20.0 | 19.1 | 46 |
| 48 | | | 20.0 | 19.2 | 19.2 | 18.4 | 48 |
| 50 | | | | | 18.4 | 17.6 | 50 |
| 52 | | | | | | 16.8 | 52 |
| 组合 Code 倍率 Parts of line | 1110 3 | 1111 3 | 2111 3 | 2211 3 | 2221 2 | 2222 2 | 组合 Code 倍率 Parts of line |

起重性能表

Lifting capacities

T 31.4~57.8m

| | | 42m | | | | | | | |
|---------------|------|--------|--------|------|--------|--------|--------|---------------|--|
| | | 31.4+7 | 36.7+7 | 42+7 | 47.3+7 | 52.6+7 | 57.8+7 | | |
| 30 | 30.5 | | | | | | | 30 | |
| 32 | 28.9 | | 28.3 | | | | | 32 | |
| 34 | 27.3 | | 27.6 | 27.6 | | | | 34 | |
| 36 | 25.7 | | 26.8 | 26.4 | 25.6 | | | 36 | |
| 38 | 24.0 | | 25.2 | 24.8 | 24.0 | 23.2 | | 38 | |
| 40 | 22.3 | | 23.5 | 24.0 | 23.2 | 22.4 | | 40 | |
| 42 | 20.4 | | 22.3 | 22.4 | 21.6 | 20.8 | 20.0 | 42 | |
| 44 | 19.3 | | 20.2 | 21.6 | 20.8 | 20.0 | 19.2 | 44 | |
| 46 | 18.2 | | 19.1 | 20.4 | 20.0 | 19.2 | 18.4 | 46 | |
| 48 | 17.2 | | 17.9 | 19.1 | 19.2 | 18.4 | 17.6 | 48 | |
| 50 | 16.4 | | 17.1 | 18.1 | 18.4 | 17.6 | 17.2 | 50 | |
| 52 | | | 16.2 | 17.0 | 17.6 | 16.8 | 16.5 | 52 | |
| 54 | | | | 16.1 | 16.8 | 16.8 | 16.0 | 54 | |
| 56 | | | | | | 16.0 | 15.2 | 56 | |
| 58 | | | | | | | 15.2 | 58 | |
| 组合 Code | 1110 | 1111 | 2111 | 2211 | 2221 | 2222 | | 组合 Code | |
| 倍率 | 3 | 3 | 3 | 2 | 2 | 2 | | 倍率 | |
| Parts of line | | | | | | | | Parts of line | |

| | | 48m | | | | | | | |
|---------------|------|--------|--------|------|--------|--------|--------|---------------|--|
| | | 31.4+7 | 36.7+7 | 42+7 | 47.3+7 | 52.6+7 | 57.8+7 | | |
| 32 | 24.3 | | | | | | | 32 | |
| 34 | 23.9 | | 24.1 | | | | | 34 | |
| 36 | 23.5 | | 23.7 | 23.2 | | | | 36 | |
| 38 | 23.1 | | 23.2 | 21.6 | 20.8 | | | 38 | |
| 40 | 22.4 | | 21.6 | 20.8 | 20.0 | 19.2 | | 40 | |
| 42 | 20.8 | | 20.8 | 20.0 | 19.2 | 18.4 | | 42 | |
| 44 | 20.0 | | 19.2 | 18.4 | 17.6 | 17.6 | 16.8 | 44 | |
| 46 | 19.2 | | 18.4 | 17.6 | 16.8 | 16.8 | 16.0 | 46 | |
| 48 | 18.4 | | 17.6 | 16.8 | 16.0 | 16.0 | 15.2 | 48 | |
| 50 | 17.6 | | 16.8 | 16.0 | 15.2 | 15.2 | 14.4 | 50 | |
| 52 | 16.8 | | 16.0 | 15.2 | 14.4 | 14.4 | 13.6 | 52 | |
| 54 | 16.0 | | 15.2 | 14.4 | 14.4 | 13.6 | 12.8 | 54 | |
| 56 | 15.2 | | 14.4 | 13.6 | 13.6 | 12.8 | 12.8 | 56 | |
| 58 | | | 13.6 | 13.6 | 12.8 | 12.0 | 12.0 | 58 | |
| 60 | | | | 12.8 | 12.0 | 12.0 | 11.2 | 60 | |
| 62 | | | | | | 11.2 | 11.2 | 62 | |
| 64 | | | | | | | 10.4 | 64 | |
| 组合 Code | 1110 | 1111 | 2111 | 2211 | 2221 | 2222 | | 组合 Code | |
| 倍率 | 2 | 2 | 2 | 2 | 2 | 2 | | 倍率 | |
| Parts of line | | | | | | | | Parts of line | |

起重性能表

Lifting capacities

T 31.4~57.8m


| | | 54m | | | | | | | |
|---------------|------|--------|--------|------|--------|--------|--------|---------------|--|
| | | 31.4+7 | 36.7+7 | 42+7 | 47.3+7 | 52.6+7 | 57.8+7 | | |
| 34 | 21.1 | | | | | | | 34 | |
| 36 | 20.7 | | 20.9 | | | | | 36 | |
| 38 | 20.3 | | 20.5 | 20.5 | | | | 38 | |
| 40 | 19.9 | | 20.1 | 20.2 | 20.0 | | | 40 | |
| 42 | 19.5 | | 19.7 | 19.2 | 18.4 | | | 42 | |
| 44 | 19.1 | | 19.2 | 18.4 | 17.6 | 16.8 | | 44 | |
| 46 | 18.9 | | 18.4 | 17.6 | 16.8 | 16.0 | 15.5 | 46 | |
| 48 | 17.6 | | 17.6 | 16.8 | 16.0 | 15.2 | 15.1 | 48 | |
| 50 | 16.8 | | 16.8 | 16.0 | 15.2 | 14.4 | 14.4 | 50 | |
| 52 | 16.0 | | 16.0 | 15.2 | 14.4 | 14.4 | 13.6 | 52 | |
| 54 | 15.2 | | 15.2 | 14.4 | 13.6 | 13.6 | 12.8 | 54 | |
| 56 | 15.2 | | 14.4 | 13.6 | 13.6 | 12.8 | 12.8 | 56 | |
| 58 | 14.4 | | 13.6 | 13.6 | 12.8 | 12.0 | 12.0 | 58 | |
| 60 | 13.6 | | 13.6 | 12.8 | 12.0 | 12.0 | 11.2 | 60 | |
| 62 | 12.8 | | 12.8 | 12.0 | 12.0 | 11.2 | 11.2 | 62 | |
| 64 | | | 12.0 | 12.0 | 11.2 | 11.2 | 10.4 | 64 | |
| 66 | | | | 11.2 | 10.4 | 10.4 | 10.4 | 66 | |
| 68 | | | | | | 9.6 | 9.6 | 68 | |
| 70 | | | | | | | 8.8 | 70 | |
| 组合 Code | 1110 | 1111 | 2111 | 2211 | 2221 | 2222 | | 组合 Code | |
| 倍率 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 倍率 | |
| Parts of line | | | | | | | | Parts of line | |

| | | 60m | | | | | | | |
|---------------|------|--------|--------|------|--------|--------|--------|---------------|--|
| | | 31.4+7 | 36.7+7 | 42+7 | 47.3+7 | 52.6+7 | 57.8+7 | | |
| 36 | 17.7 | | | | | | | 36 | |
| 38 | 17.3 | | 17.5 | | | | | 38 | |
| 40 | 16.9 | | 17.1 | 16.7 | | | | 40 | |
| 42 | 16.5 | | 16.7 | 16.5 | 16.5 | | | 42 | |
| 44 | 16.3 | | 16.3 | 16.3 | 16.3 | | | 44 | |
| 46 | 16.0 | | 16.0 | 16.1 | 16.0 | 15.9 | | 46 | |
| 48 | 15.8 | | 15.8 | 15.9 | 15.2 | 15.2 | | 48 | |
| 50 | 15.6 | | 15.6 | 15.2 | 14.4 | 14.4 | 13.5 | 50 | |
| 52 | 15.4 | | 15.2 | 14.4 | 13.6 | 13.6 | 12.8 | 52 | |
| 54 | 15.2 | | 14.4 | 13.6 | 13.6 | 12.8 | 12.0 | 54 | |
| 56 | 14.4 | | 13.6 | 13.6 | 12.8 | 12.0 | 12.0 | 56 | |
| 58 | 13.6 | | 13.6 | 12.8 | 12.0 | 12.0 | 11.2 | 58 | |
| 60 | 12.8 | | 12.8 | 12.0 | 11.2 | 11.2 | 10.4 | 60 | |
| 62 | 12.8 | | 12.0 | 11.2 | 11.2 | 10.4 | 10.4 | 62 | |
| 64 | 12.0 | | 12.0 | 11.2 | 10.4 | 10.4 | 9.6 | 64 | |
| 66 | 11.2 | | 11.2 | 10.4 | 10.4 | 9.6 | 9.6 | 66 | |
| 68 | 11.2 | | 10.4 | 10.4 | 9.6 | 9.6 | 8.8 | 68 | |
| 70 | | | 10.4 | 9.6 | 9.6 | 8.8 | 8.8 | 70 | |
| 72 | | | | 9.6 | 8.8 | 8.8 | 8.0 | 72 | |
| 74 | | | | | | 8.0 | 8.0 | 74 | |
| 76 | | | | | | | 7.2 | 76 | |
| 组合 Code | 1110 | 1111 | 2111 | 2211 | 2221 | 2222 | | 组合 Code | |
| 倍率 | 2 | 2 | 2 | 2 | 2 | 2 | 1 | 倍率 | |
| Parts of line | | | | | | | | Parts of line | |

起重性能表

Lifting capacities

T 31.4~57.8m



| m | 66m | | | | | | m |
|--------------------------------|-----------|-----------|-----------|-----------|-----------|-----------|--------------------------------|
| | 31.4+7 | 36.7+7 | 42+7 | 47.3+7 | 52.6+7 | 57.8+7 | |
| 38 | 14.1 | | | | | | 38 |
| 40 | 14.0 | 14.6 | | | | | 40 |
| 42 | 13.9 | 14.3 | 14.5 | | | | 42 |
| 44 | 13.8 | 14.0 | 14.2 | | | | 44 |
| 46 | 13.7 | 13.8 | 13.9 | 13.8 | | | 46 |
| 48 | 13.5 | 13.5 | 13.6 | 13.6 | 13.3 | | 48 |
| 50 | 13.3 | 13.3 | 13.4 | 13.4 | 12.9 | | 50 |
| 52 | 13.1 | 13.1 | 13.2 | 13.2 | 12.5 | 12.4 | 52 |
| 54 | 12.9 | 12.9 | 13.0 | 13.0 | 12.1 | 12.0 | 54 |
| 56 | 12.7 | 12.8 | 12.8 | 12.8 | 11.7 | 11.6 | 56 |
| 58 | 12.6 | 12.6 | 12.7 | 12.0 | 11.2 | 11.2 | 58 |
| 60 | 12.4 | 12.5 | 12.0 | 11.2 | 10.9 | 10.4 | 60 |
| 62 | 12.3 | 12.0 | 11.2 | 11.2 | 10.4 | 10.4 | 62 |
| 64 | 12.0 | 12.0 | 11.2 | 10.4 | 10.3 | 9.6 | 64 |
| 66 | 11.2 | 11.2 | 10.4 | 10.4 | 9.6 | 9.6 | 66 |
| 68 | 11.2 | 10.4 | 10.4 | 9.6 | 9.6 | 8.8 | 68 |
| 70 | 10.4 | 10.4 | 9.6 | 9.6 | 8.8 | 8.8 | 70 |
| 72 | 10.4 | 9.6 | 9.6 | 8.8 | 8.8 | 8.0 | 72 |
| 74 | 9.6 | 9.6 | 8.8 | 8.8 | 8.0 | 8.0 | 74 |
| 76 | | 8.8 | 8.8 | 8.0 | 8.0 | 7.2 | 76 |
| 78 | | | 8.0 | 7.9 | 7.2 | 7.2 | 78 |
| 80 | | | | | 7.2 | 6.9 | 80 |
| 82 | | | | | | 6.4 | 82 |
| 组合 Code 倍率 Parts of line | 1110 2 | 1111 2 | 2111 2 | 2211 2 | 2221 1 | 2222 1 | 组合 Code 倍率 Parts of line |

起重性能表

Lifting capacities

T 31.4~57.8m

| | | 72m | | | | | | | |
|--------------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|--------------------------------|--|
| | | 31.4+7 | 36.7+7 | 42+7 | 47.3+7 | 52.6+7 | 57.8+7 | | |
| 42 | 10.8 | | | | | | | 38 | |
| 44 | 10.6 | | 10.3 | | | | | 40 | |
| 46 | 10.5 | | 10.2 | 10.3 | | | | 42 | |
| 48 | 10.3 | | 10.1 | 10.2 | 10.1 | | | 44 | |
| 50 | 10.1 | | 10.1 | 10.1 | 10.0 | 9.1 | | 46 | |
| 52 | 10.0 | | 10.0 | 10.0 | 9.9 | 8.8 | 7.6 | 48 | |
| 54 | 9.8 | | 9.9 | 9.9 | 9.9 | 8.5 | 7.3 | 50 | |
| 56 | 9.7 | | 9.7 | 9.8 | 9.8 | 8.2 | 7.0 | 52 | |
| 58 | 9.7 | | 9.6 | 9.7 | 9.6 | 7.9 | 6.7 | 54 | |
| 60 | 9.4 | | 9.4 | 9.5 | 9.4 | 7.6 | 6.5 | 56 | |
| 62 | 9.3 | | 9.3 | 9.3 | 9.1 | 7.2 | 6.3 | 58 | |
| 64 | 9.2 | | 9.2 | 9.1 | 8.4 | 7.1 | 6.1 | 60 | |
| 66 | 9.1 | | 9.1 | 8.4 | 8.4 | 6.6 | 5.9 | 62 | |
| 68 | 9.0 | | 9.1 | 8.4 | 7.7 | 6.6 | 5.7 | 64 | |
| 70 | 8.4 | | 8.4 | 7.7 | 7.7 | 6.0 | 5.5 | 66 | |
| 72 | 8.4 | | 8.4 | 7.7 | 7.0 | 6.0 | 5.3 | 68 | |
| 74 | 7.7 | | 7.7 | 7.0 | 7.0 | 5.4 | 5.2 | 70 | |
| 76 | 7.7 | | 7.7 | 7.0 | 6.8 | 5.4 | 5.0 | 72 | |
| 78 | 7.5 | | 7.0 | 6.8 | 6.3 | 5.3 | 4.8 | 74 | |
| 80 | 7.0 | | 6.9 | 6.3 | 6.1 | 4.8 | 4.7 | 76 | |
| 82 | | | 6.3 | 6.1 | 5.6 | 4.7 | 4.5 | 78 | |
| 84 | | | | 5.6 | 5.5 | 4.4 | 4.2 | 80 | |
| 86 | | | | | | 4.2 | 4.0 | 82 | |
| 88 | | | | | | | 3.6 | | |
| 组合 Code 倍率 Parts of line | 1110 2 | 1111 2 | 2111 2 | 2211 2 | 2221 1 | 2221 1 | 2222 1 | 组合 Code 倍率 Parts of line | |

起重性能表


Lifting capacities

T 31.4~57.8m

| | | 78m | | | | | | | |
|--------------------------------|-----------|-----------|-----------|-----------|-----------|-----------|--------------------------------|----|--|
| | | 31.4+7 | 36.7+7 | 42+7 | 47.3+7 | 52.6+7 | 57.8+7 | | |
| 44 | 7.4 | | | | | | | 44 | |
| 46 | 7.3 | 7.4 | | | | | | 46 | |
| 48 | 7.3 | 7.3 | 6.0 | | | | | 48 | |
| 50 | 7.2 | 7.2 | 6.0 | 6.0 | | | | 50 | |
| 52 | 7.1 | 7.1 | 5.9 | 5.9 | 5.6 | | | 52 | |
| 54 | 7.0 | 7.1 | 5.9 | 5.8 | 5.6 | | | 54 | |
| 56 | 7.0 | 7.0 | 5.8 | 5.8 | 5.6 | 5.3 | | 56 | |
| 58 | 6.8 | 6.9 | 5.7 | 5.7 | 5.6 | 5.3 | | 58 | |
| 60 | 6.7 | 6.8 | 5.7 | 5.6 | 5.6 | 5.1 | | 60 | |
| 62 | 6.7 | 6.7 | 5.6 | 5.6 | 5.5 | 4.8 | | 62 | |
| 64 | 6.6 | 6.6 | 5.5 | 5.5 | 5.5 | 4.7 | | 64 | |
| 66 | 6.5 | 6.5 | 5.5 | 5.5 | 5.4 | 4.6 | | 66 | |
| 68 | 6.4 | 6.5 | 5.4 | 5.4 | 5.3 | 4.4 | | 68 | |
| 70 | 6.4 | 6.4 | 5.4 | 5.3 | 5.0 | 4.2 | | 70 | |
| 72 | 6.4 | 6.4 | 5.3 | 5.0 | 4.9 | 4.1 | | 72 | |
| 74 | 6.3 | 6.3 | 5.0 | 5.0 | 4.5 | 3.9 | | 74 | |
| 76 | 6.3 | 6.3 | 5.0 | 4.5 | 4.5 | 3.8 | | 76 | |
| 78 | 6.2 | 6.0 | 4.9 | 4.5 | 4.4 | 3.8 | | 78 | |
| 80 | 6.0 | 6.0 | 4.5 | 4.4 | 4.0 | 3.7 | | 80 | |
| 82 | 5.8 | 5.4 | 4.4 | 4.0 | 3.9 | 3.5 | | 82 | |
| 84 | 5.4 | 5.4 | 4.0 | 4.0 | 3.7 | 3.4 | | 84 | |
| 86 | 5.3 | 5.1 | 4.0 | 3.7 | 3.5 | 3.3 | | 86 | |
| 88 | | 4.8 | 3.8 | 3.5 | 3.3 | 3.2 | | 88 | |
| 90 | | | | 3.3 | 3.1 | 3.0 | | 90 | |
| 92 | | | | | 3.0 | 2.8 | | 92 | |
| 94 | | | | | | 2.6 | | 94 | |
| 组合 Code 倍率 Parts of line | 1110 1 | 1111 1 | 2111 1 | 2211 1 | 2221 1 | 2222 1 | 组合 Code 倍率 Parts of line | | |

起升高度曲线图
Lifting height chart









主臂+超起+变幅副臂
Boom+ Super lifting device + Luffing jib




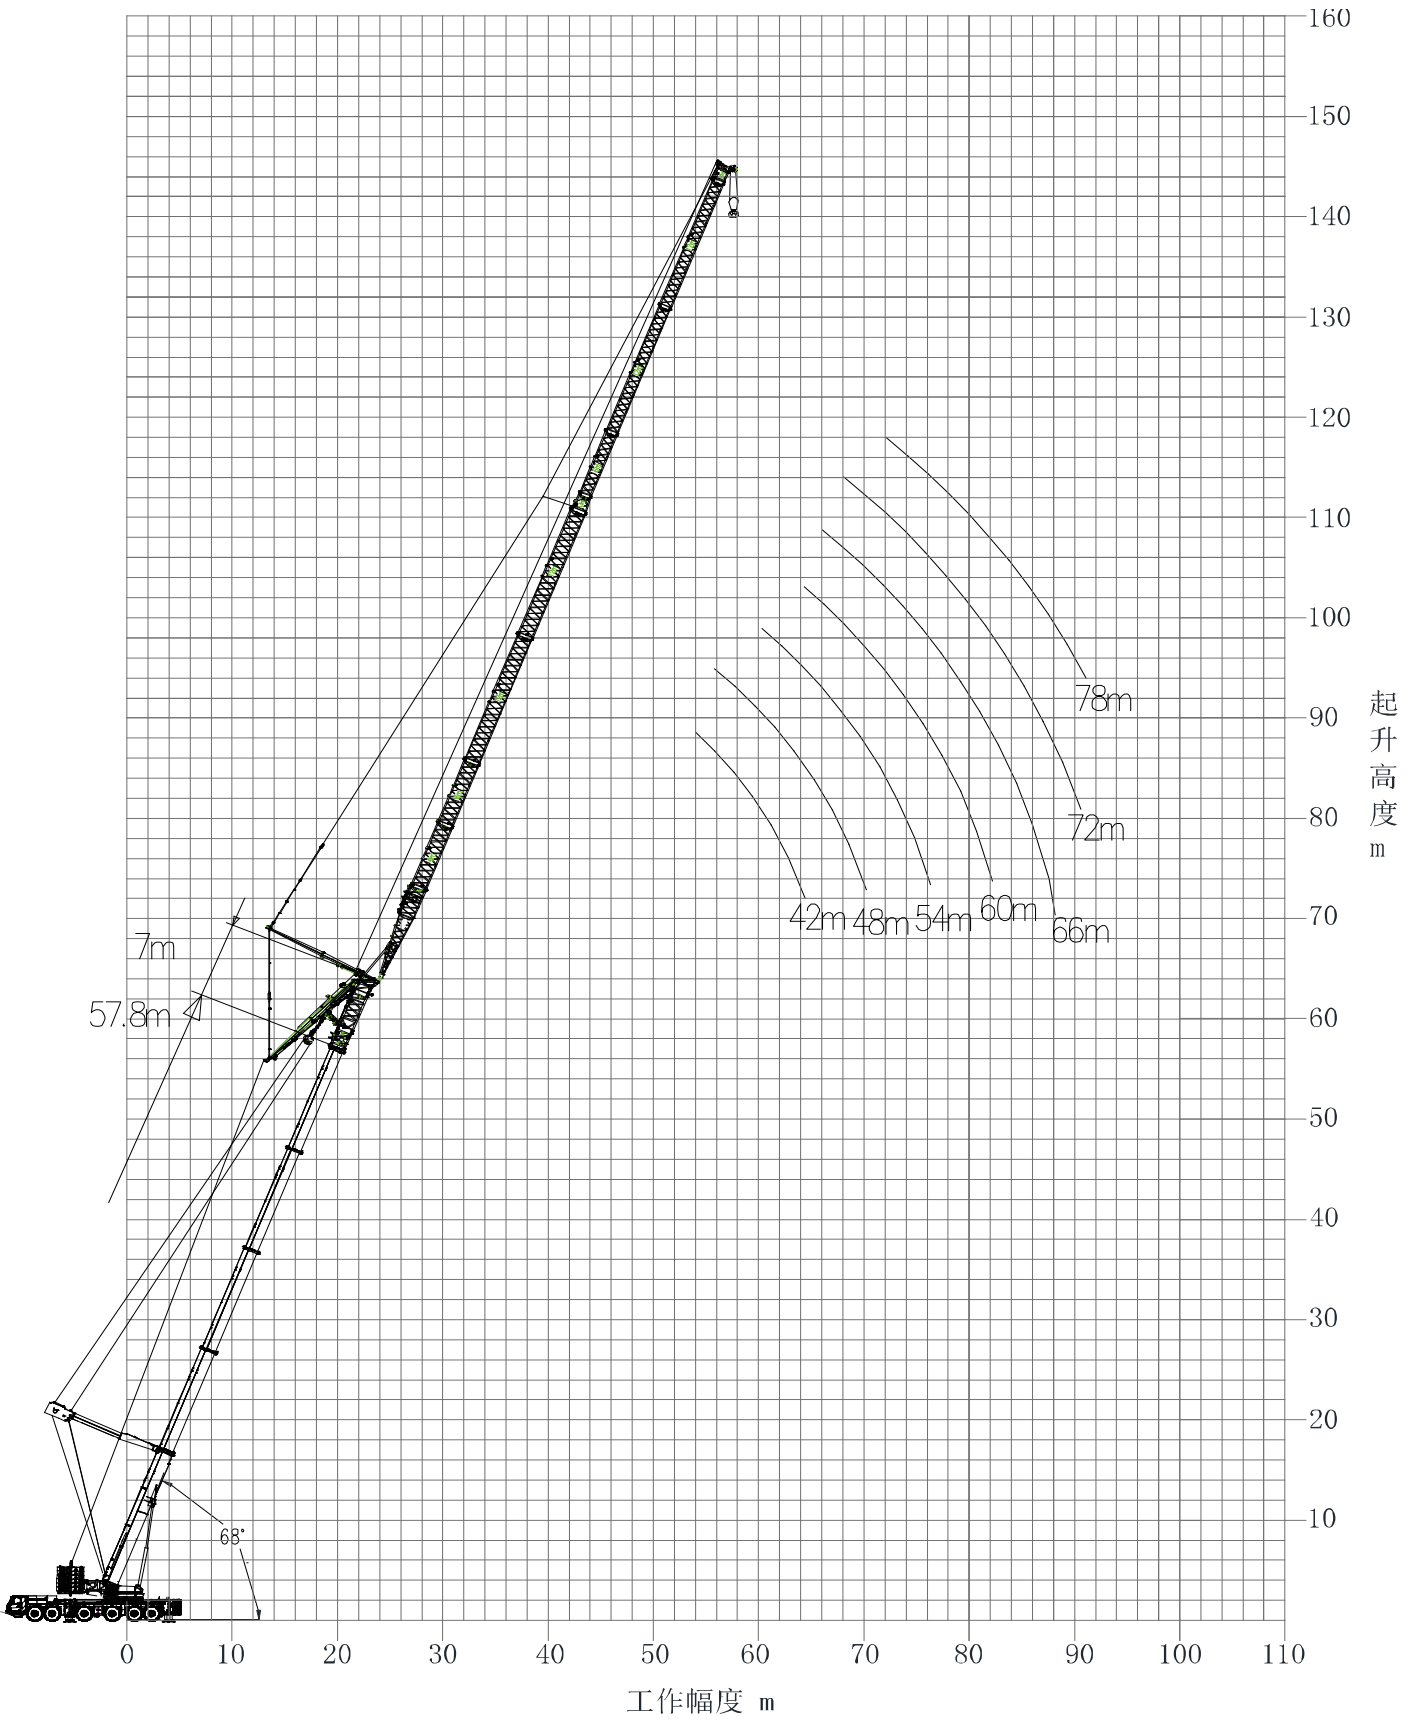






起重性能表

Lifting capacities

T 31.4~57.8m









| | |  |  |  |  |  |  |  |  | | |
|---------------|--|---|---|---|---|---|---|---|--|---|---------------|
| | | 42m | | | | | | | | | |
| m | | 31.4+7 | 36.7+7 | 42+7 | 47.3+7 | 52.6+7 | 57.8+7 | | | m | |
| 38 | | 23.2 | | | | | | | | | 38 |
| 40 | | 22.4 | | | | | | | | | 40 |
| 42 | | 21.6 | 20.8 | | | | | | | | 42 |
| 44 | | 20.8 | 20.0 | 19.2 | | | | | | | 44 |
| 46 | | 20.0 | 19.2 | 18.4 | | | | | | | 46 |
| 48 | | 19.2 | 18.4 | 17.6 | 16.0 | | | | | | 48 |
| 50 | | 18.4 | 17.6 | 16.8 | 16.0 | 15.2 | | | | | 50 |
| 52 | | 17.4 | 16.8 | 16.0 | 15.2 | 14.4 | | | | | 52 |
| 54 | | 16.5 | 16.0 | 15.2 | 14.4 | 13.6 | 13.0 | | | | 54 |
| 56 | | | 15.2 | 14.4 | 13.6 | 13.6 | 12.8 | | | | 56 |
| 58 | | | | 14.4 | 13.6 | 12.8 | 12.0 | | | | 58 |
| 60 | | | | | 12.8 | 12.0 | 12.0 | | | | 60 |
| 62 | | | | | | 12.0 | 11.2 | | | | 62 |
| 64 | | | | | | | 11.2 | | | | 64 |
| 组合 Code | | 1110 | 1111 | 2111 | 2211 | 2221 | 2222 | | | | 组合 Code |
| 倍率 | | 2 | 2 | 2 | 2 | 2 | 1 | | | | 倍率 |
| Parts of line | | 2 | 2 | 2 | 2 | 2 | 1 | | | | Parts of line |









| | |  |  |  |  |  |  |  |  | | |
|---------------|--|---|---|---|---|---|---|---|--|---|---------------|
| | | 48m | | | | | | | | | |
| m | | 31.4+7 | 36.7+7 | 42+7 | 47.3+7 | 52.6+7 | 57.8+7 | | | m | |
| 42 | | 18.4 | | | | | | | | | 42 |
| 44 | | 17.6 | 16.8 | | | | | | | | 44 |
| 46 | | 16.8 | 16.0 | 15.2 | | | | | | | 46 |
| 48 | | 16.0 | 15.2 | 14.4 | | | | | | | 48 |
| 50 | | 15.2 | 14.4 | 13.6 | 12.8 | | | | | | 50 |
| 52 | | 14.4 | 13.6 | 12.8 | 12.0 | 11.2 | | | | | 52 |
| 54 | | 13.6 | 13.6 | 12.0 | 11.2 | 10.4 | | | | | 54 |
| 56 | | 12.8 | 12.8 | 12.0 | 11.2 | 10.4 | 9.6 | | | | 56 |
| 58 | | 12.8 | 12.0 | 11.2 | 10.4 | 9.6 | 9.6 | | | | 58 |
| 60 | | 12.0 | 11.2 | 10.4 | 9.6 | 9.6 | 8.8 | | | | 60 |
| 62 | | | 11.2 | 10.4 | 9.6 | 8.8 | 8.0 | | | | 62 |
| 64 | | | | 9.6 | 8.8 | 8.7 | 8.0 | | | | 64 |
| 66 | | | | | 8.8 | 8.0 | 7.7 | | | | 66 |
| 68 | | | | | | 7.7 | 7.2 | | | | 68 |
| 70 | | | | | | | 6.8 | | | | 70 |
| 组合 Code | | 1110 | 1111 | 2111 | 2211 | 2221 | 2222 | | | | 组合 Code |
| 倍率 | | 2 | 2 | 2 | 1 | 1 | 1 | | | | 倍率 |
| Parts of line | | 2 | 2 | 2 | 1 | 1 | 1 | | | | Parts of line |

起重性能表

Lifting capacities

T 31.4~57.8m


| | |  |  |  |  |  |  |  |  | | | | | | |
|---------------|---|---|---|---|---|---|---|---|--|--|--|--|---------------|---|--|
| | | 54m | | | | | | | | | | | | | |
| | | 31.4+7 | 36.7+7 | 42+7 | 47.3+7 | 52.6+7 | 57.8+7 | | | | | | | | |
| 44 | m | 17.6 | | | | | | | | | | | 44 | m | |
| 46 | | 16.8 | 16.0 | | | | | | | | | | 46 | | |
| 48 | | 16.0 | 15.2 | | | | | | | | | | 48 | | |
| 50 | | 15.2 | 14.4 | 13.6 | | | | | | | | | 50 | | |
| 52 | | 14.4 | 13.6 | 12.8 | 12.0 | | | | | | | | 52 | | |
| 54 | | 13.6 | 12.8 | 12.0 | 11.2 | | | | | | | | 54 | | |
| 56 | | 12.8 | 12.8 | 12.0 | 11.2 | 10.4 | | | | | | | 56 | | |
| 58 | | 12.8 | 12.0 | 11.2 | 10.4 | 9.6 | 10.4 | | | | | | 58 | | |
| 60 | | 12.0 | 11.2 | 10.4 | 9.6 | 9.6 | 9.6 | 8.8 | | | | | 60 | | |
| 62 | | 11.2 | 11.2 | 10.4 | 9.6 | 8.8 | 8.8 | 8.0 | | | | | 62 | | |
| 64 | | 11.2 | 10.4 | 9.6 | 8.8 | 8.7 | 8.0 | 8.0 | | | | | 64 | | |
| 66 | | 10.4 | 10.4 | 9.6 | 8.8 | 8.0 | 8.0 | 7.7 | | | | | 66 | | |
| 68 | | | 9.6 | 8.8 | 8.0 | 7.8 | 7.8 | 7.2 | | | | | 68 | | |
| 70 | | | | 8.6 | 7.9 | 7.2 | 7.2 | 6.9 | | | | | 70 | | |
| 72 | | | | | 7.2 | 7.0 | 7.0 | 6.4 | | | | | 72 | | |
| 74 | | | | | | 6.4 | 6.4 | 6.1 | | | | | 74 | | |
| 76 | | | | | | | | 5.6 | | | | | 76 | | |
| 组合 Code | | 1110 | 1111 | 2111 | 2211 | 2221 | 2222 | | | | | | 组合 Code | | |
| 倍率 | | 2 | 2 | 1 | 1 | 1 | 1 | | | | | | 倍率 | | |
| Parts of line | | 2 | 2 | 1 | 1 | 1 | 1 | | | | | | Parts of line | | |


| | |  |  |  |  |  |  |  |  | | | | | | |
|---------------|---|---|---|---|---|---|---|---|--|--|--|--|---------------|---|--|
| | | 60m | | | | | | | | | | | | | |
| | | 31.4+7 | 36.7+7 | 42+7 | 47.3+7 | 52.6+7 | 57.8+7 | | | | | | | | |
| 48 | m | 15.2 | | | | | | | | | | | 48 | m | |
| 50 | | 14.4 | 12.8 | | | | | | | | | | 50 | | |
| 52 | | 13.6 | 12.8 | 11.2 | | | | | | | | | 52 | | |
| 54 | | 12.8 | 12.8 | 11.2 | | | | | | | | | 54 | | |
| 56 | | 12.8 | 12.0 | 11.2 | 10.4 | | | | | | | | 56 | | |
| 58 | | 12.0 | 11.2 | 10.4 | 9.6 | | | | | | | | 58 | | |
| 60 | | 11.2 | 11.2 | 9.6 | 9.6 | 8.8 | | | | | | | 60 | | |
| 62 | | 11.2 | 10.4 | 9.6 | 8.8 | 8.0 | | | | | | | 62 | | |
| 64 | | 10.4 | 9.6 | 8.8 | 8.0 | 8.0 | 7.2 | | | | | | 64 | | |
| 66 | | 9.6 | 9.6 | 8.8 | 8.0 | 7.2 | 7.0 | | | | | | 66 | | |
| 68 | | 9.6 | 8.8 | 8.0 | 7.7 | 7.1 | 6.4 | | | | | | 68 | | |
| 70 | | 8.8 | 8.8 | 8.0 | 7.2 | 6.4 | 6.2 | | | | | | 70 | | |
| 72 | | 8.8 | 8.0 | 7.2 | 6.9 | 6.3 | 5.6 | | | | | | 72 | | |
| 74 | | | 7.9 | 7.2 | 6.4 | 5.9 | 5.4 | | | | | | 74 | | |
| 76 | | | | 6.7 | 6.1 | 5.6 | 5.1 | | | | | | 76 | | |
| 78 | | | | | 5.6 | 5.2 | 4.8 | | | | | | 78 | | |
| 80 | | | | | | 4.8 | 4.5 | | | | | | 80 | | |
| 82 | | | | | | | 4.1 | | | | | | 82 | | |
| 组合 Code | | 1110 | 1111 | 2111 | 2211 | 2221 | 2222 | | | | | | 组合 Code | | |
| 倍率 | | 2 | 1 | 1 | 1 | 1 | 1 | | | | | | 倍率 | | |
| Parts of line | | 2 | 1 | 1 | 1 | 1 | 1 | | | | | | Parts of line | | |

起重性能表

Lifting capacities

T 31.4~57.8m




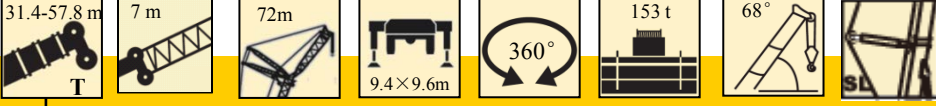




|  | | | | | | | |
|--|--------|--------|------|--------|--------|--------|---------------|
| 66m | | | | | | | |
| m | 31.4+7 | 36.7+7 | 42+7 | 47.3+7 | 52.6+7 | 57.8+7 | m |
| 50 | 14.1 | | | | | | 50 |
| 52 | 13.5 | 12.0 | | | | | 52 |
| 54 | 12.8 | 12.0 | | | | | 54 |
| 56 | 12.0 | 12.0 | 11.2 | | | | 56 |
| 58 | 12.0 | 11.2 | 10.4 | 9.6 | | | 58 |
| 60 | 11.2 | 10.4 | 9.6 | 8.8 | | | 60 |
| 62 | 10.4 | 10.4 | 9.6 | 8.8 | 8.0 | | 62 |
| 64 | 10.4 | 9.6 | 8.8 | 8.0 | 8.0 | | 64 |
| 66 | 9.6 | 9.6 | 8.8 | 8.0 | 7.2 | 7.0 | 66 |
| 68 | 9.6 | 8.8 | 8.0 | 7.8 | 7.1 | 6.4 | 68 |
| 70 | 8.8 | 8.8 | 8.0 | 7.2 | 6.4 | 6.2 | 70 |
| 72 | 8.8 | 8.0 | 7.2 | 6.9 | 6.3 | 5.6 | 72 |
| 74 | 8.0 | 8.0 | 7.2 | 6.4 | 6.0 | 5.5 | 74 |
| 76 | 8.0 | 7.2 | 6.8 | 6.2 | 5.6 | 5.1 | 76 |
| 78 | 7.6 | 7.2 | 6.4 | 5.8 | 5.3 | 4.8 | 78 |
| 80 | | 6.8 | 6.1 | 5.5 | 5.0 | 4.5 | 80 |
| 82 | | | 5.6 | 5.2 | 4.7 | 4.2 | 82 |
| 84 | | | | 4.8 | 4.4 | 4.0 | 84 |
| 86 | | | | | 4.1 | 3.7 | 86 |
| 88 | | | | | | 3.4 | 88 |
| 组合 Code | 1110 | 1111 | 2111 | 2211 | 2221 | 2222 | 组合 Code |
| 倍率 | | | | | | | 倍率 |
| Parts of line | 2 | 1 | 1 | 1 | 1 | 1 | Parts of line |

|  | | | | | | | |
|--|--------|--------|------|--------|--------|--------|---------------|
| 72m | | | | | | | |
| m | 31.4+7 | 36.7+7 | 42+7 | 47.3+7 | 52.6+7 | 57.8+7 | m |
| 54 | 9.9 | | | | | | 54 |
| 56 | 9.8 | 9.1 | | | | | 56 |
| 58 | 9.8 | 9.1 | 9.1 | | | | 58 |
| 60 | 9.1 | 9.1 | 8.4 | | | | 60 |
| 62 | 9.1 | 8.4 | 7.7 | 7.0 | | | 62 |
| 64 | 8.4 | 7.7 | 7.0 | 7.0 | 5.4 | | 64 |
| 66 | 8.4 | 7.7 | 7.0 | 6.3 | 4.8 | | 66 |
| 68 | 7.7 | 7.0 | 6.3 | 6.2 | 4.8 | 4.2 | 68 |
| 70 | 7.6 | 7.0 | 6.3 | 5.6 | 4.5 | 4.1 | 70 |
| 72 | 7.0 | 6.8 | 6.1 | 5.4 | 4.2 | 3.8 | 72 |
| 74 | 6.8 | 6.3 | 5.6 | 4.9 | 3.9 | 3.5 | 74 |
| 76 | 6.3 | 6.1 | 5.4 | 4.8 | 3.6 | 3.3 | 76 |
| 78 | 6.1 | 5.6 | 4.9 | 4.5 | 3.4 | 3.0 | 78 |
| 80 | 5.6 | 5.4 | 4.8 | 4.2 | 3.2 | 2.9 | 80 |
| 82 | 5.5 | 5.1 | 4.5 | 4.0 | 3.0 | 2.6 | 82 |
| 84 | 5.2 | 4.8 | 4.2 | 3.7 | 2.8 | 2.4 | 84 |
| 86 | | 4.5 | 4.0 | 3.5 | 2.6 | 2.3 | 86 |
| 88 | | | 3.7 | 3.2 | 2.4 | 2.1 | 88 |
| 90 | | | | 3.0 | 2.2 | | 90 |
| 92 | | | | | 2.0 | | 92 |
| 组合 Code | 1110 | 1111 | 2111 | 2211 | 2221 | 2222 | 组合 Code |
| 倍率 | | | | | | | 倍率 |
| Parts of line | 1 | 1 | 1 | 1 | 1 | 1 | Parts of line |

起重性能表

Lifting capacities

T 31.4~57.8m

| | |  |  |  |  |  |  |  |  | | |
|---------------|---|---|---|---|---|---|---|---|--|---------------|---|
| | | 78m | | | | | | | | | |
| | | 31.4+7 | 36.7+7 | 42+7 | 47.3+7 | 52.6+7 | 57.8+7 | | | | |
| 56 | m | 7.0 | | | | | | | | 56 | m |
| 58 | | 6.9 | 7.2 | | | | | | | 58 | |
| 60 | | 6.9 | 7.0 | | | | | | | 60 | |
| 62 | | 6.8 | 6.8 | 5.0 | | | | | | 62 | |
| 64 | | 6.7 | 6.6 | 5.0 | 4.6 | | | | | 64 | |
| 66 | | 6.6 | 6.6 | 5.0 | 4.5 | | | | | 66 | |
| 68 | | 6.6 | 6.0 | 4.5 | 4.4 | 4.0 | | | | 68 | |
| 70 | | 6.5 | 6.0 | 4.5 | 4.0 | 3.7 | | | | 70 | |
| 72 | | 6.0 | 5.4 | 4.3 | 3.9 | 3.5 | 3.2 | | | 72 | |
| 74 | | 5.9 | 5.4 | 4.0 | 3.5 | 3.3 | 3.0 | | | 74 | |
| 76 | | 5.4 | 5.2 | 3.9 | 3.4 | 3.0 | 2.8 | | | 76 | |
| 78 | | 5.3 | 4.8 | 3.5 | 3.2 | 2.9 | 2.6 | | | 78 | |
| 80 | | 4.8 | 4.7 | 3.4 | 3.0 | 2.7 | 2.4 | | | 80 | |
| 82 | | 4.7 | 4.4 | 3.2 | 2.8 | 2.5 | 2.2 | | | 82 | |
| 84 | | 4.5 | 4.2 | 3.0 | 2.7 | 2.3 | 2.1 | | | 84 | |
| 86 | | 4.2 | 3.9 | 2.9 | 2.5 | 2.2 | | | | 86 | |
| 88 | | 4.0 | 3.7 | 2.7 | 2.3 | 2.0 | | | | 88 | |
| 90 | | 3.8 | 3.5 | 2.5 | 2.2 | | | | | 90 | |
| 92 | | | 3.3 | 2.4 | 2.0 | | | | | 92 | |
| 94 | | | | 2.2 | | | | | | 94 | |
| 组合 Code | | 1110 | 1111 | 2111 | 2211 | 2221 | 2222 | | | 组合 Code | |
| 倍率 | | 1 | 1 | 1 | 1 | 1 | 1 | | | 倍率 | |
| Parts of line | | | | | | | | | | Parts of line | |

主要技术参数表

Table of main technical data

| 类别 Category | 项目 Item | 单位 Unit | 参数 Parameter | |
|--------------------|--|-------------|-------------------------------|-------|
| 尺寸参数 Dimensions | 外形尺寸 (长×宽×高) Dimensions (length×width×height) | mm | 16835×3000×4000(72t) | |
| | 轴距 Wheel base | mm | 1650+3050+2665+2100+1650 | |
| | 轮距 (前/后) Track (Front/ Rear) | mm | 2530/2530/2530/2530/2530/2530 | |
| | 前悬/后悬 Front/ Rear overhang | mm | 2689/1086 | |
| | 前伸/后伸 Front/ Rear extension | mm | 1295/650 | |
| 重量参数 Weight | 最大允许总质量 Max. permissible weight | kg | 72000 | |
| | 轴荷 Axle load | 一轴 1st axle | kg | 12000 |
| | | 二轴 2nd axle | kg | 12000 |
| | | 三轴 3rd axle | kg | 12000 |
| | | 四轴 4th axle | kg | 12000 |
| | | 五轴 5th axle | kg | 12000 |
| | | 六轴 6th axle | kg | 12000 |
| 动力参数 Power | 发动机型号 Engine model | — | OM473LA.E5-1 | |
| | 额定功率/转速 Rated power/rpm | kW/(r/min) | 480/1800 | |
| | 最大输出扭矩/转速 Max. output torque/rpm | N.m/(r/min) | 3100/(900-1400) | |
| 行驶参数 Travel | 最高车速 Max. travel speed | km/h | 80 | |
| | 最低稳定车速 Min. stable travel speed | km/h | 2 | |
| | 最小转弯直径 Min. turning diameter | m | 23.3 | |
| | 臂头最小转弯直径 Min. turning diameter at boom tip | m | 27.6 | |
| | 最小离地间隙 Min. ground clearance | mm | 330 | |
| | 接近角 Approach angle | ° | 16 | |
| | 离去角 Departure angle | ° | 30 | |
| | 制动距离 (制动初速度为30km/h) Braking distance (at 30 km/h) | m | ≤10 | |
| | 最大爬坡能力 Max. grade ability | % | 52 | |
| | 百公里油耗 Fuel consumption per 100 km | L | 105 | |
| 噪音 Noise | 加速行驶机外噪声 Exterior noise level during acceleration | dB(A) | ≤84 | |
| | 驾驶员耳旁噪声 Noise level at seated position | dB(A) | ≤90 | |

主要技术参数表

Table of main technical data

| 类别 Category | 项目 Item | | 单位 Unit | 参数 Parameter | |
|--|---|--|--------------|-----------------|-----|
| 主要性能参数 Main performance | 最大额定总起重量 Max. rated lifting capacity | | t | 500 | |
| | 最小额定工作幅度 Min. rated working radius | | m | 3 | |
| | 转台尾部回转半径 Turning radius at turntable tail | | mm | 6900 | |
| | 最大起重力矩 Max. load moment | 基本臂 Base boom | kN.m | 13883 | |
| | | 最长主臂 Fully-extended boom | kN.m | 10579 | |
| | 支腿跨距 Outrigger span | 纵向 Longitudinal | m | 9.4 | |
| | | 横向 Lateral | m | 9.6 | |
| | 起升高度 Lifting height | 基本臂 Base boom | m | 17 | |
| | | 最长主臂 Fully-extended boom | m | 84 | |
| | | 最长主臂+副臂 Fully-extended boom + Jib | m | 125 | |
| | | 最长主臂+变幅副臂 Fully-extended boom + Luffing Jib | m | 137 | |
| | 起重臂长度 Boom length | 基本臂 Base boom | m | 16.1 | |
| | | 最长主臂 Fully-extended boom | m | 85 | |
| | | 最长主臂+副臂 Fully-extended boom + Jib | m | 128 | |
| 最长主臂+变幅副臂 Fully-extended boom + Luffing Jib | | m | 142.8 | | |
| 副臂安装角 Jib offset angle | | ° | 0、20、40、60 | | |
| 工作速度参数 Working speed | 起重臂起臂时间 Time for boom raising | | s | ≤100 | |
| | 起重臂全伸时间 Time for boom extending fully | | s | ≤1300 | |
| | 最大回转速度 Max. slewing speed | | r/min | ≥1.2 | |
| | 支腿收放时间 Time for outrigger extending and retracting | 水平支腿 (单侧) Outrigger beam (single side) | 收 Retracting | s | ≤30 |
| | | | 放 Extending | s | ≤40 |
| | | 垂直支腿 Outrigger jack | 收 Retracting | s | ≤85 |
| | | | 放 Extending | s | ≤85 |
| 起升速度 (单绳,第四层,空载) Hoisting speed (single line, 4th layer, no load) | 主起升机构 Main winch | m/min | ≥120 | | |
| | 变幅副臂变幅卷扬 Luffing winch of luffing jib | m/min | ≥40 | | |
| 噪声 Noise | 机外辐射 Exterior noise level | | dB (A) | ≤111 | |
| | 司机位置处 Noise level at seated position | | dB (A) | ≤85 | |

符号标识

Description of symbols

常规标识

General symbols

| | | | |
|--|----------------------------|---|---------------------------------------|
|  | 吊臂长度 Boom length |  | 车桥 Axle |
|  | 工作幅度 Radius |  | 行驶速度 Travel speed |
|  | 吊臂仰角 Boom angle |  | 爬坡能力 Grade ability |
|  | 固定副臂长度 Fixed jib length |  | 轮胎 Tire |
|  | 副臂安装角 Jib offset angle |  | 平衡重 Counterweight |
|  | 超起 Super lifting device |  | 上车 Superstructure |
|  | 变幅副臂 Luffing jib |  | 底盘 Chassis |
|  | 风电臂 Wind power jib |  | 360°全回转 360° operation of the boom |
|  | 支腿 Outrigger |  | 卷扬 Winch |
|  | 吊钩 Hook block | | |

注意事项

Notes

1. 表中额定总起重量值，是在平整的坚固地面上本起重机能够保证的最大总起重量，包括吊钩和吊具的重量，所以为了估算重物重量，必须减去上述的装置重量。
2. 表中的工作幅度为起吊重物离地时起重物到起重机会转轴线的水平距离，是包括起重臂变形量在内的实际值，因而起吊前应考虑起重臂变形量。
3. 只允许在5级(瞬时风速14.1m/s，风压125N/m²)风以下进行作业。
4. 吊重前操作者必须对物体的重量和工作范围了解后选择合适的作业工况，严禁超出表中的数值。幅度及臂长在相邻两个数值之间时，应依据两个数值中较小值确定起重作业。
5. 应按主臂仰角范围作业，即使是空载，也不应使主臂仰角处于范围外，谨防整机倾翻。
6. 表中的主臂长度应要按照每节臂的伸缩要求进行伸出。

1. The total rated load given in the rated lifting load table are the maximum lifting capacity when the crane is set up on firm and level ground. The total rated load includes the weight of the hook block and slings. The weight of above-mentioned devices should be deducted from the rated lifting load.
2. The working radius shown in the rated lifting load table is the horizontal distance between the gravity center of the load and the rotational axis of the crane when the load is lifted off ground, and it is the actual value including loaded boom deflection. Take boom deflection into consideration before beginning a lifting operation.
3. A lifting operation is permissible only when the wind force is below grade 5 (instantaneous wind speed is 14.1 m/s, wind pressure is 125 N/m²).
4. Before beginning lifting operation, the operator should know the weight of the load to be lifted and its working range, and then select proper working conditions. Never operate the crane beyond the limit shown in the chart. Use the lower value from the chart when the boom length or working radius is between the range of values.
5. Observe the boom angle limit. Never operate the crane with the boom angle beyond the recommended limit even if no load is being carried. Otherwise, the crane will tip.
6. The boom should be extended according to the telescoping code shown by digits.



本印刷品不属于合同。出于产品不断改进的需要，我们保留对产品型号、参数、配置进行变更的权利，恕不另行通知。图片仅供参考，具体产品以实物为准。图片中产品可能并非标准配置，部分部件可能需要另行购置。办理牌照和上路行驶需遵守当地法规。

This print is not part of the contract. We reserve the right to modify the design (such as product model, parameters and configuration) without notice for improvement. The pictures are just for reference. The product in the picture may not be standard configuration. Some parts need to be purchased separately. Conform to the local laws for license application and road traveling.