



XCA500BR 全地面起重机 / All Terrain Crane

技术规格书


Technical specifications



500 t



85 m



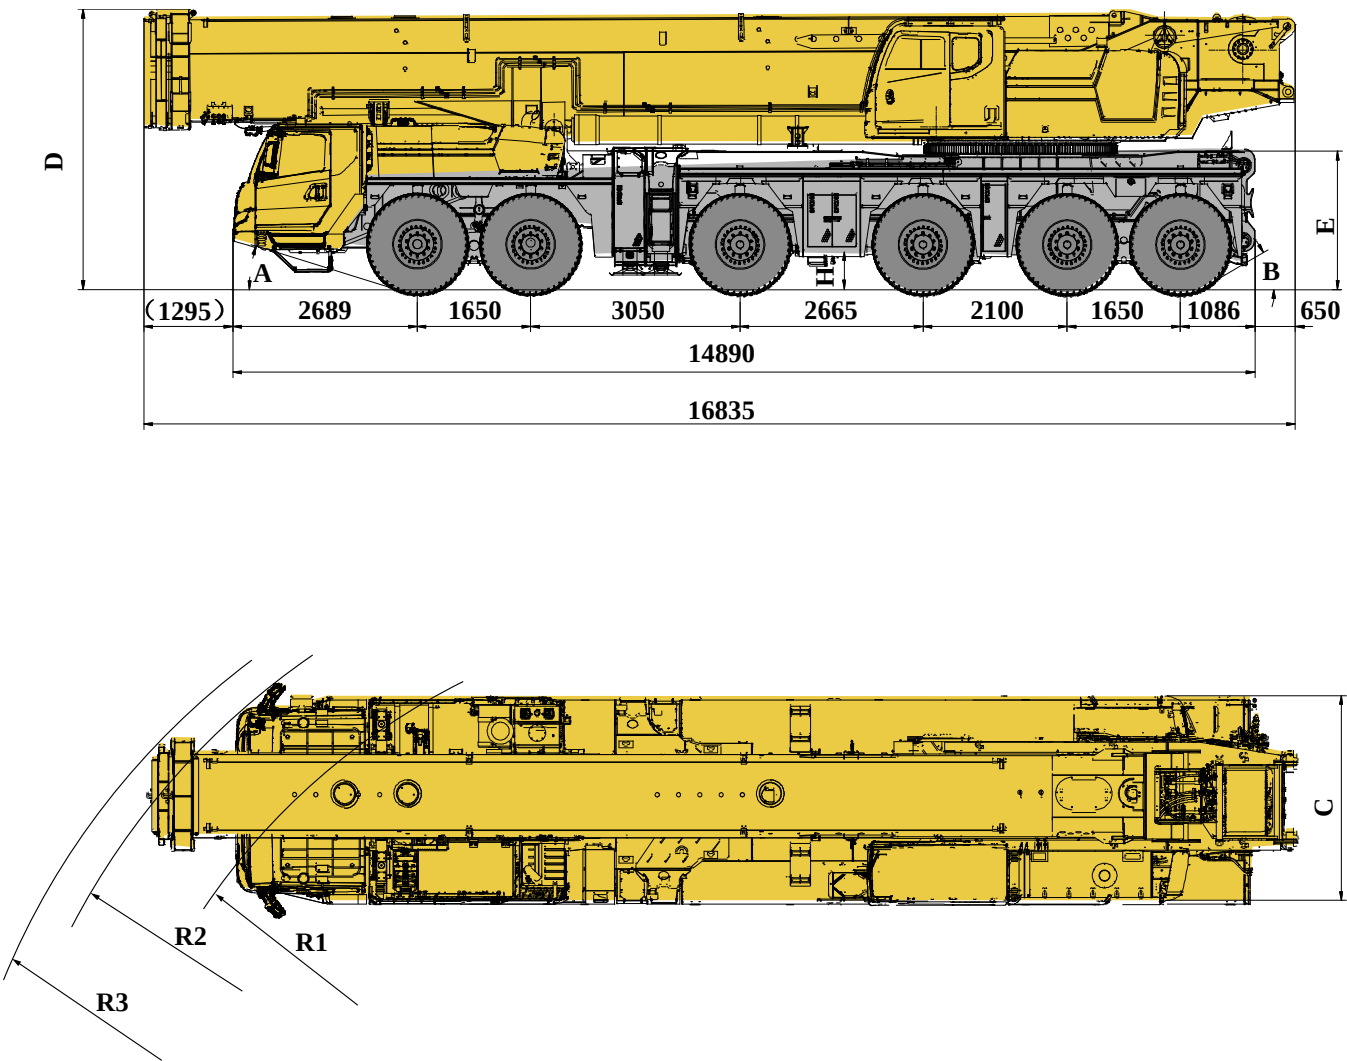
137 m



目录
Contents

目录 Contents	
尺寸参数 Dimensions	3
技术规格 Technical specifications	4-9
重量/作业速度 Weight / Working speeds	10-11
运输部件尺寸 Dimension and weight of parts transported	12-15
平衡重 Counterweight	16
臂架组合方案 Boom / Jib combinations	17-21
主臂 Boom	22-25
主臂+超起 Boom + Super lifting device	26-28
主臂+风电臂 Boom + Wind power jib	29-31
主臂+固定副臂 Boom + Fixed Jib	32-62
主臂+固定副臂+超起 Boom + Fixed jib + Super lifting device	63-93
主臂+变幅副臂+超起 Boom + Luffing jib + Super lifting device	94-113
主要技术参数表 Table of main technical data	114-115
符号标识 Description of symbols	116
注意事项 Notes	117

72t行驶状态
72t travel configuration



	A	B	C	D	E	H	R1	R2	R3
445/95 R 25 (16.00 R 25)	16°	30°	3000mm	4000mm	2015mm	330mm	6780	11650	13350

*D=4000mm
该状态为悬挂最低位状态
Suspensions at lowest position

技术规格

Technical specifications

	底盘
车架	徐工设计、制造，箱型截面结构，高强度钢材制造。
支腿	4支腿，H形布置，配备支腿压力传感器，水平伸缩和垂直伸缩由液压控制。支腿油缸均设有单向阀，且垂直支腿带有双向液压锁；底盘两侧装有电控操纵控制台，控制台板装有夜光水平仪、照明灯和增速按钮。
发动机	WP15H660E61，直列六缸水冷电控柴油发动机，潍柴动力制造，额定功率485kw/1800rpm，最大扭矩3200Nm/(900-1400)rpm，最大基准扭矩：3500N.m，国VI排放标准。 燃油箱容积：600L； 尿素箱容积：90L。
液压系统	变量泵通过取力器联接至发动机，用于支腿、转向、悬挂和散热。
变速箱	ZF电控自动变速箱，12个前进档，2个倒档，带变矩器、缓速器。
分动箱	株齿机械式分动箱
车桥	大江高强度车桥，配备气控盘式制动器，3、4、5、6桥驱动，全桥转向。

	底盘
悬挂	所有车桥均采用油气悬挂系统，减震效果好，具有自动调平、悬架升降、弹性刚性转换等功能。 悬架油缸行程：-120mm ~ +130mm。
轮胎	12个轮胎，每桥均装单胎，承载力大。 轮胎规格：445/95R25（16.00R25）
转向	全桥转向，1~2轴为机械加液压助力转向，3~6轴为电液控制转向，可适应多种工况的要求，实现多种转向模式。
制动	行车制动：双回路气压制动，作用于所有车轮。 驻车制动：弹簧贮能制动，作用于2-6轴车轮。 辅助制动：发动机制动，变速箱缓速制动。
驾驶室	新型钢结构豪华全宽驾驶室。配备电动升降器的安全玻璃、可调式座椅、电动调节后视镜、可调节高度及角度方向盘，倒车显示器、大屏幕彩色液晶显示器等。新型组合式中控台布局安全合理，采用圆弧造型，体现人性化的设计。 标配冷暖空调。
电气系统	直流24伏特，2个12伏电池组串并联。

技术规格

Technical specifications

	上车
结构	徐工设计、制造，高强度钢材制造。
液压系统	电比例变量泵用于起升、回转，开式泵用于变幅、伸缩。采用进口电液换向阀，与变量柱塞泵进行良好的匹配，启停平稳，大功率风冷式液压油冷却器，有效降低系统油温。
操纵方式	先导电比例操纵，无级调速，由左右2个操纵手柄控制起重机的全部动作。
主起升机构	由液压马达驱动，内置行星齿轮减速器和常闭式制动器。双折线绳槽卷筒，进口钢丝绳，配置袋式索具。
回转机构	三排滚柱外齿式回转支承，双回转机构，由液压马达驱动，内置行星齿轮减速器和常闭式制动器，可连续回转360°，具有动力控制或自由回转的功能，可无级调速。
操纵室	带大圆弧玻璃，推拉式车门，可调式座椅，装有安全玻璃和顶部保护栏，配备力矩限制器、电控箱、电动前窗刮水器、发动机动力加速踏板、发动机起动开关、前顶窗双层遮阳帘、后窗遮阳帘等。标配冷暖空调。
安全装置	液压平衡阀、液压溢流阀、液压双向锁、力矩限制器；操纵杆弹簧式回中系统；三圈保护器，防止钢丝绳过放；臂头设置高度限位，防止钢丝绳过卷；风速仪，检测高空风速；卷扬监视装置，实时监控卷扬状态。
组合配重	总重153t，有0t、20t、40t、60t、80t、100t、120t、140t、150t和153t十种组合方式。

	上车
力矩限制器	当实际力矩接近过载时，发出听视觉警报，并在过载之前自动停止危险动作。具有超载记忆功能（黑匣子）和故障自诊断功能。
电气系统	直流24伏特，采用PLC可编程控制器，CAN总线控制网络，具有系统实时检测和故障自诊断功能。
吊钩	225吨吊钩（双钩） 175吨吊钩（双钩） 90吨吊钩（双钩） 40吨吊钩 13.5吨吊钩
变副卷扬机构	包括变幅滑轮组，用于变幅副臂的变幅。
主臂	7节，“U”形截面的筒形焊接结构。单缸插销伸缩机构，1个装有安全阀的双作用的伸缩油缸，控制所有吊臂的伸缩，有46%、92%和全伸模式可供选择。主臂长度：16.1m～85m。
固定副臂	桁架式焊接结构，有0°、20°、40°和60°四种安装角度。 固定副臂长度：6m～42m。
变幅副臂	桁架式焊接结构，具有68°、75°、82°三种主臂仰角。 变幅副臂长度：24~78m
超起	Y型，安装在基本臂端部，双倍率超起钢丝绳设计，使超起拉力成倍提升。大臂长状态下挠度减小20%～30%，起重性能成倍提升。
风电臂头	桁架式结构，风电臂长度：14m

	上车
无线遥控装置	进行起重机主动作及辅助动作的远程操作，提高操作的方便性及安全性
臂头监视器	臂头监视器装在起重机臂头的位置，采用高清晰摄像头及显示器，无线方式传输信号；主要用来观察吊钩的吊装情况，可根据吊重物的远近自动调焦。
臂内监视器	臂内监视器装在伸臂内油缸上，采用高清晰摄像头及显示器，无线方式传输信号；主要用来观察伸臂内臂销的插拔过程。

技术规格

Technical specifications

	Chassis
Frame	Designed and manufactured by XCMG, made of high strength steel with box cross-section.
Outriggers	4 outriggers are in H-shaped arrangement. Equipped with outrigger pressure sensor. Outrigger beams and jacks are hydraulically controlled. There is an outrigger control station located at each side of the chassis, and there is a level gauge, an illuminator and speed buttons on each control station. There is a check valve fitted in each outrigger cylinder, and a double-way hydraulic valve fitted in each jack cylinder.
Engine	WP15H660E61, Inline six-cylinder water -cooled, electric control diesel engine, manufactured by Weichai Power, with rated power of 485kw /1800rpm, the max. torque of 3200Nm /(900-1400)rpm and the max. reference torque of 3500Nm, compliant with China VI emission standard. Fuel tank capacity: 600 L. AdBlue tank volume: 90L.
Hydraulic system	The variable displacement pump is connected to the engine through PTO for controlling the movements of outriggers, steering, suspension and heat dissipation.
Transmission	ZF Electrical-control automatic transmission with torque converter and retarder brake; 12 forward gears and 2 reverse gears available.
Transfer gear	Zhuzhou Gear Mechanical transfer gear
Axles	Dajiang high strength axles, equipped with pneumatic disc brake , with Axle 3-6 for driving and full-axle steering.

	Chassis
Suspension	Hydro-pneumatic suspension system has good shock-absorbing effect. Various functions such as automatic leveling, moving up and down of suspension, and switching over of elastic and rigid suspension. The stroke of suspension cylinder is -120mm~+130mm.
Tires	12 tires, each axle is equipped with single tire, with large bearing capacity. Tire specifications: 445/95R25 (16.00R25).
Steering	All axles steering, 1~2 axles: the mechanical and hydraulic power steering;3~6 axles: the electro-hydraulic control steering. It is suitable for various demands of working conditions and various steering modes can be realized.
Brakes	Service brake: dual-circuit air pressure brake, acting on all wheels. Parking brake: spring-loaded brake, acting on the wheels of axles 2~6. Auxiliary brake: engine brake and transmission retarder brake.
Driver's cab	New full dimension steel structure cab. Safety glass, electrically operated door window lifters, adjustable seats, electrical adjustable rear-view mirrors, steering wheel adjustable in height and angle, and large screen liquid crystal display are equipped. New type of combined control panel is reasonably and ergonomically arranged in arch shape. Heater and air conditioner are standard.
Electrical System	DC 24 V, with 2 sets of 12 V batteries in series.

技术规格

Technical specifications

	Superstructure
Frame	Designed and manufactured by XCMG, made of high strength steel.
Hydraulic system	Electric proportional variable pump is used for lifting and slewing operations; the open pump is used for telescoping and luffing operations. Imported electro-hydraulic change valve, matching perfectly and stably with plunger variable pump. Large power air-cooled hydraulic oil cooler, which may effectively reduce the oil temperature in the system.
Control system	The electric proportional pilot control system is equipped with two levers at left and right sides controlling all movements of the crane, and stepless speed regulation is available.
Main winch system	Driven by a hydraulic motor, with build-in planetary gear reducer and constant closed brake. Drum with Lebus grooves, imported wire rope and pouch socket are available.
Slewing system	Three-point roller external tooth slewing ring with a dual slewing mechanism is driven by hydraulic motor, with built-in planetary gear reducer and constant-closed brake equipped, and may continuously slew 360°. Power control and free slewing function as well as stepless speed regulation are available.
Operator's cab	Large arc glass, sliding door, adjustable seat, safety glass, top protective rails, LMI, controller box, electric windshield wipers, engine accelerator pedal, engine start switch and sun shield for roof window and rear window, etc. are available. Heater and air conditioner are standard.
Safety devices	Hydraulic balance valve, hydraulic relief valve, hydraulic double-way valve, LMI, joystick spring return system are available. Lowering limiter is equipped in winch to prevent rope over-releasing. Anti-two block is fitted on the boom head to prevent rope over-winding. Anemometer is equipped to check whether aerial wind velocity is in safe working range. Winch monitor is for real-time monitoring of winch running.
Combined counterweight	The total weight reaches 153 t. Ten counterweight combinations of 0 t, 20 t, 40 t, 60 t, 80 t, 100 t, 120 t, 140 t, 150 t and 153 t are available.

	Superstructure
LMI	When the actual load moment is approaching the limit value, audible and visual warning will be sent out, and the dangerous operation will be automatically stopped before overloading. Overload memory function (black box) and fault self-diagnosis function are available.
Electrical System	DC 24 V, PLC programmable controller, CAN bus control network; the control system has real-time detection and fault self-diagnosis functions.
Hook blocks	225 t hook block (double hook) 175 t hook block (double hook) 90 t hook block (double hook) 40 t hook block 13.5 t hook block
Luffing winch jib	It mainly consists of the luffing sheave block and is used for the luffing of the luffing jib.
Boom	7-section boom with U cross-section, welding structure. Single cylinder pinning telescoping system is adopted. One double-acting cylinder with safety valve is used for controlling the telescoping movements of all boom sections with 46%, 92% and fully-extended telescoping pattern available. Boom length: 16.1 m~85 m.
Fixed jib	Lattice welding structure with 0°, 20°, 40°and 60° offset angles available. Fixed jib length: 6 m~42 m.
Luffing jib	Lattice welding structure; three boom angles: 68° , 75° , 82° . Luffing jib length: 24 m~78 m.
Super-lifting device	Y-shaped, installed at top of base boom, wire rope with double parts of line contributes to twofold pulling force. With the boom extended out, the deflection can be decreased by 20%~30%, multiplying the lifting performance.
Wind power jib head	Lattice structure; jib length: 14 m

技术规格

Technical specifications

	Superstructure
Wireless remote controller	The wireless controller can remote control the main operation and auxiliary operation of crane, improving the convenience and security during operation.
Boom head monitor	The boom head monitor is installed in the boom head of the crane. It is equipped with a high-definition camera and a display and transmits signals by wireless means. The monitor is mainly used to observe the loading of the hook blocks and can adjust focus automatically according to the distance of the loads.
Inner boom monitor	The inner boom monitor is installed in the cylinder of the telescopic boom. It is equipped with a high-definition camera and a display and transmits signals by wireless means. The monitor is mainly used to observe the insertion and pull of the boom pins of the telescopic boom.

车型与选装件

Version and optional equipment

车型	功能描述	选择
标准型	主臂+超起配置+风电臂，七节主臂85m	
增强型	主臂+超起+风电臂+固定副臂配置，七节主臂85m,固定副臂42m	
全工况型	主臂+超起+风电臂+固定副臂+变幅副臂配置，七节主臂85m，固定副臂42m，变幅副臂78m	

可选装件		选择
吊钩	225吨钩	
OBU装置	OnKey193D-O11FA	国六

Version and optional equipment

Version	Function description	Selection
Standard	Boom + super lifting device +Wind power jib (7-section boom of 85 m)	
Strengthened	Boom+ super lifting device + wind power jib + fixed jib (7-section boom of 85 m, fixed jib of 42 m)	
Full configuration	Boom + super lifting device + wind power jib + fixed jib + luffing jib (7-section boom of 85 m, fixed jib of 42 m and a luffing jib of 78 m)	

Optional equipment		Selection
Hook block	225 t	
OBU	OnKey193D-O11FA	China VI

重量
Weight



车桥 Axle	1	2	3	4	5	6	总重量 Total weight
t	12	12	12	12	12	12	72 ¹⁾
t	16.5	16.5	16.5	16.2	16.2	16.2	98 ²⁾
t	23.2	23.2	23.2	18.9	18.9	18.9	126 ³⁾

1) 72t: 上车不带3-7节吊臂、平衡重、超起、起重吊钩、固定副臂、变幅副臂、风电臂；下车不带后固定支腿及后活动腿、备胎及支架；
驱动行驶：12×8；轮胎规格445/95R25

1) 72 t: Superstructure: 3~7 boom sections, counterweight, super lifting device, hook blocks, and wind power jib are not excluded;
Chassis: rear outrigger boxes and beams, spare tire and its bracket are not excluded.
Driving mode: 12×8; tire specification: 445/95R25

2) 98t: 72t状态+3-7节吊臂、后活动支腿以及后固定支腿、备胎及支架；
驱动行驶：12×8；轮胎规格445/95R25

2) 98 t: 72 t configuration + 3rd~7th boom sections, main winch and its wire rope, front and rear outrigger beams, rear outrigger boxes, spare tire and its bracket
Driving mode: 12×8; tire specification: 445/95R25

3) 126t: 72t状态+3-7节吊臂、超起、后活动支腿以及后固定支腿、备胎及支架、10t平衡重、支脚盘
驱动行驶：12×8；轮胎规格445/95R25

3) 126 t: 72 t configuration + 3rd~7th boom sections, super lifting device, main winch and its wire rope, front and rear outrigger beams, rear outrigger boxes, spare tire and its bracket, 10 t counterweight and outrigger floats
Driving mode: 12×8; tire specification: 445/95R25

表中正常重量及桥荷为装配445/95R25轮胎时的值；
The GVW and axle loads listed above are the values when 445/95R25 tires are equipped.



吊钩 Hook block	倍率 Parts of line	吊钩重量 Weight (kg)	吊钩尺寸 Dimensions (mm)	备注 Remarks
225t	20	4000	2509×1362×900	双钩 Double hook
175 t	15	3000	2216.5×1155×835	双钩 Double hook
90 t	7	1900	2157×1000×780	双钩 Double hook
40 t	3	1300	2004×700×573	单钩 Single hook
13.5 t	1	500	900×500×500	单钩 Single hook

作业速度
Working speed



445/95 R 25 (16.00 R 25)



2 ~ 80




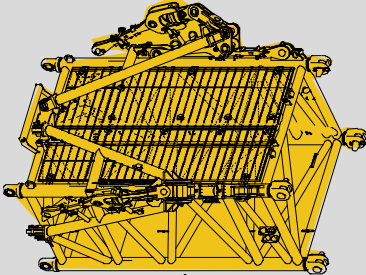
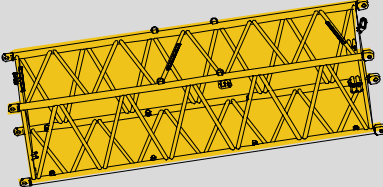
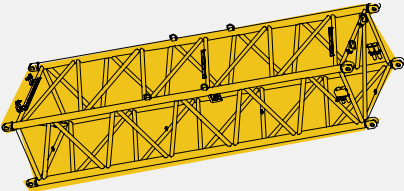
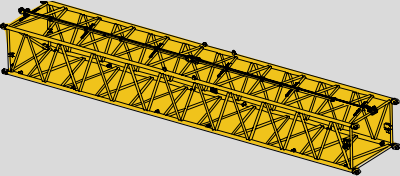
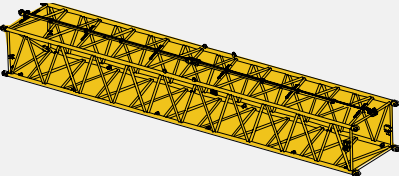
52%



作业机构 Operation mechanism	作业速度 Working speed	最大单绳拉力 Max. single line pull	钢丝绳直径/长度 Rope diameter/ length
	0-120 m/min, 单绳, 第5层, 空载 m/min, single line, 5th layer, no load	13.5 t	24 mm/620mm
	0-1.2 r/min		
	从-0.5°抬起至82°约100s Approx. 100s for boom luffing from -0.5° to 82°		
	从16.1m伸出至85m约1300s Approx. 1300s for boom extension from 16.1 m to 85 m		







运输部件尺寸

Dimension and weight of parts transported

名称 Part Name	图示 Figure	单重 Weight (kg)	数量 Quantity	尺寸 Dimensions (mm)
连接架（末节臂） Connecting bracket (last boom section)		1100	1	2000×1900×1800
翼式连接架 Wing-type connecting bracket		2280	1	3800×2700×2000
安装组件 Installation assembly		8200	1	12300×2000×3000
加长节I Jib insert I		880	2	6300×1800×1500
加长节II Jib insert II		830	2	6300×1600×1200
加长节III Jib insert III		1550	2	12300×1800×1500
加长节IV Jib insert IV		1450	2	12300×1600×1200



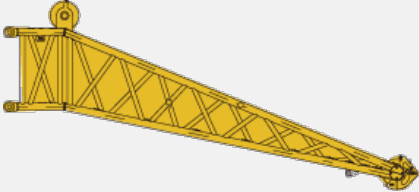

运输部件尺寸

Dimension and weight of parts transported

名称 Part Name	图示 Figure	单重 Weight (kg)	数量 Quantity	尺寸 Dimensions (mm)
过渡节 Transition section		330	1	2000×1800×1500
臂头总成 Boom head assembly		680	1	2400×1600×1800
变幅起升机构 Winch for luffing jib		5870 (标配Standard) /5906 (选配Optional)	1	2290×1495×1750
连接架(五节臂) Connecting bracket (5 th boom section)		1000	1	2100×1900×1900
旋转架 Rotating bracket		2050	1	4400×2000×2300
臂头小车 Pulley cart		980	1	2500×2100×1600
拉板总成 Pendant assembly		1750	1	7000×620×650
腰绳总成 Center hitch assembly		130	1	——





运输部件尺寸

Dimension and weight of parts transported

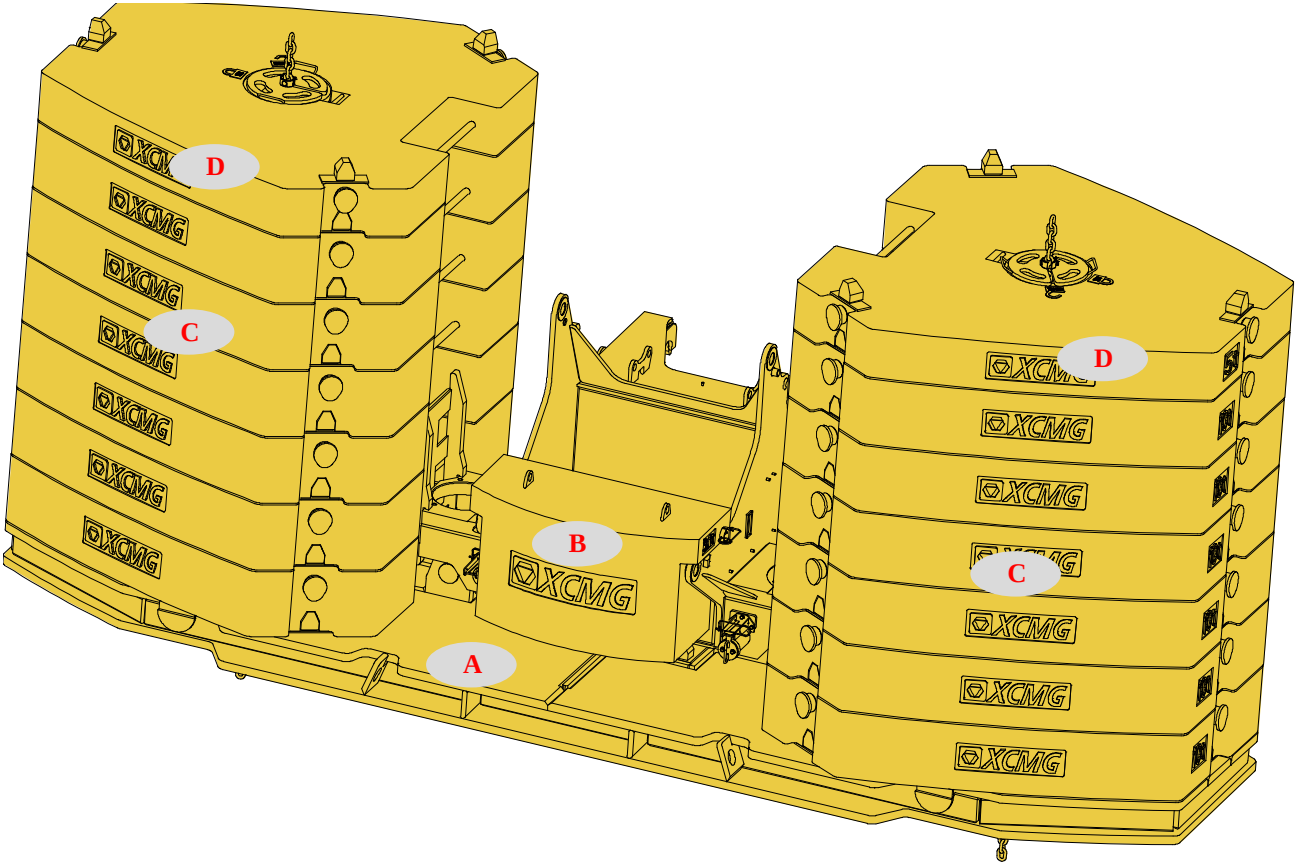
名称 Part Name		图示 Figure	单重 Weight (kg)	数量 Quantity	尺寸 Dimensions (mm)
风电臂 Wind power jib	连接架 Connecting bracket		950	1	2300×1400×1700
	翼式连接架 Wing-type connecting bracket		3500	1	5300×2500×2200
	风电臂头 Wind power jib head		1970	1	7800×1400×2300
超起装置 Super lifting device			18000	1	11000×3000×1650
2-7节臂 2-7 boom sections			28000	1	16200×2200×2200
3-7节臂 3-7 boom sections			22000	1	15900×2200×2200

运输部件尺寸

Dimension and weight of parts transported

名称 Part Name	图示 Figure	单重 Weight (kg)	数量 Quantity	尺寸 Dimensions (mm)
后固定支腿（含两组后 活动支腿总成、备胎及 备胎支架） Rear outrigger box (including 2 sets of rear outrigger beam assembly, spare tire and its bracket)		8920	1	2030×2980×2144
前活动支腿总成 Front outrigger beam assembly		2142	2	423×995×2923
配重支架 Counterweight bracket		25	1	400×200×300
		25	1	150×700×300
超起托架 Super lifting device bracket		37	2	630×300×300 + 675×300×300
前支脚盘 Front outrigger float		62	2	176×600×681

平衡重
Counterweight



平衡重 Counterweight	A	B	C	D
尺寸 (长×宽×高) mm	6988×2790×2025	1400×835×623	2552×2350×515	2552×2350×410
Size (L×W×H) mm				
重量 t Weight (t)	20	3	10	5

工况模式 Working mode	153 t	150 t	140 t	120 t	100 t
组合形式 Combinations	A+B+C×12+D×2	A+C×12+D×2	A+C×12	A+C×10	A+C×8

工况模式 Working mode	80 t	60 t	40 t	20 t	0t
组合形式 Combinations	A+C×6	A+C×4	A+C×2	A	—

臂架组合方案

Boom / Jib combinations


风电臂-14m

Wind power jib-14m




固定副臂 – 6m

Fixed jib – 6m




固定副臂 – 12m

Fixed jib – 12m




固定副臂 – 18m

Fixed jib – 18m




固定副臂 – 24m

Fixed jib – 24m



固定副臂 – 30m

Fixed jib – 30m




固定副臂 – 36m

Fixed jib – 36m










固定副臂 – 42m

Fixed jib – 42m







臂架组合方案
Boom / Jib combinations

变幅副臂 – 24m Luffing jib – 24m	
变幅副臂 – 30m Luffing jib – 30m	
变幅副臂 – 36m Luffing jib – 36m	
变幅副臂 – 42m Luffing jib – 42m	
变幅副臂 – 48m Luffing jib – 48m	
变幅副臂 – 54m Luffing jib – 54m	
变幅副臂 – 60m Luffing jib – 60m	
变幅副臂 – 66m Luffing jib – 66m	
变幅副臂 – 72m Luffing jib – 72m	
变幅副臂 – 78m Luffing jib – 78m	

臂架组合方案

Boom / Jib combinations

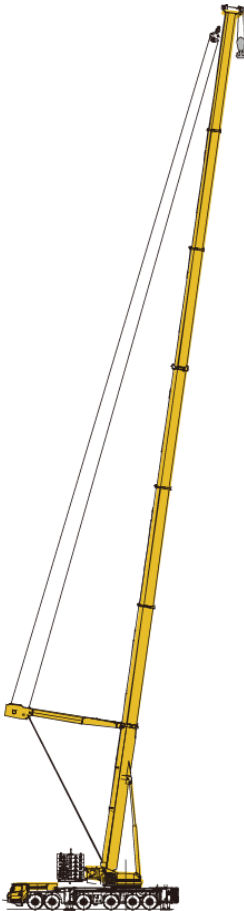
部件 Component	结构形式 Structure	尺寸 (长×宽×高) m Size (L×W×H) m	重量 kg Weight kg
连接架 I Connecting bracket I		2.0×1.9×1.8	1100
翼型连接架 Wing-type connecting bracket		3.8×2.7×2.0	2280
旋转架 Rotating bracket		4.4×2.0×2.3	2050
连接架II Connecting bracket II		2.1×1.9×1.9	1000
安装组件 Installation assembly		12.3×2.0×3.0	8200
副臂加长节 I Jib insert I		6.3×1.8×1.5	880
副臂加长节 II Jib insert II		6.3×1.6×1.2	830
副臂加长节 III Jib insert III		12.3×1.8×1.5	1550
副臂加长节 IV Jib insert IV		12.3×1.6×1.2	1450
过渡节 Transition section		2.0×1.8×1.5	330
臂头 Head section		2.4×1.6×1.8	680

臂架组合方案
Boom / Jib combinations



主臂
Boom

T: 16.1~85 m



超起主臂 (选装)
Super lifting device (optional) + boom

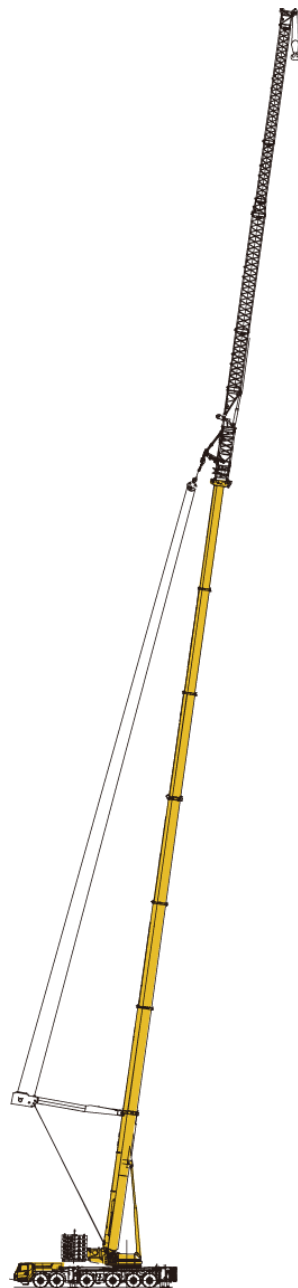
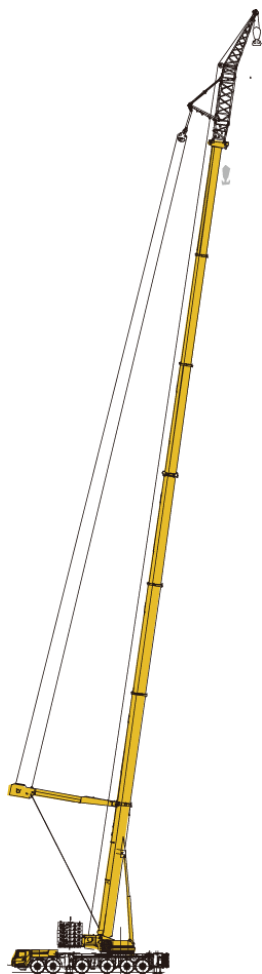
T: 37.2~85 m



固定副臂 (选装)
Fixed jib(optional) + boom

T:16.1~79.5 m+3 m
F:6~42 m

臂架组合方案
Boom / Jib combinations



超起风电臂 (选装)
Super lifting device+ wind power
jib (optional)

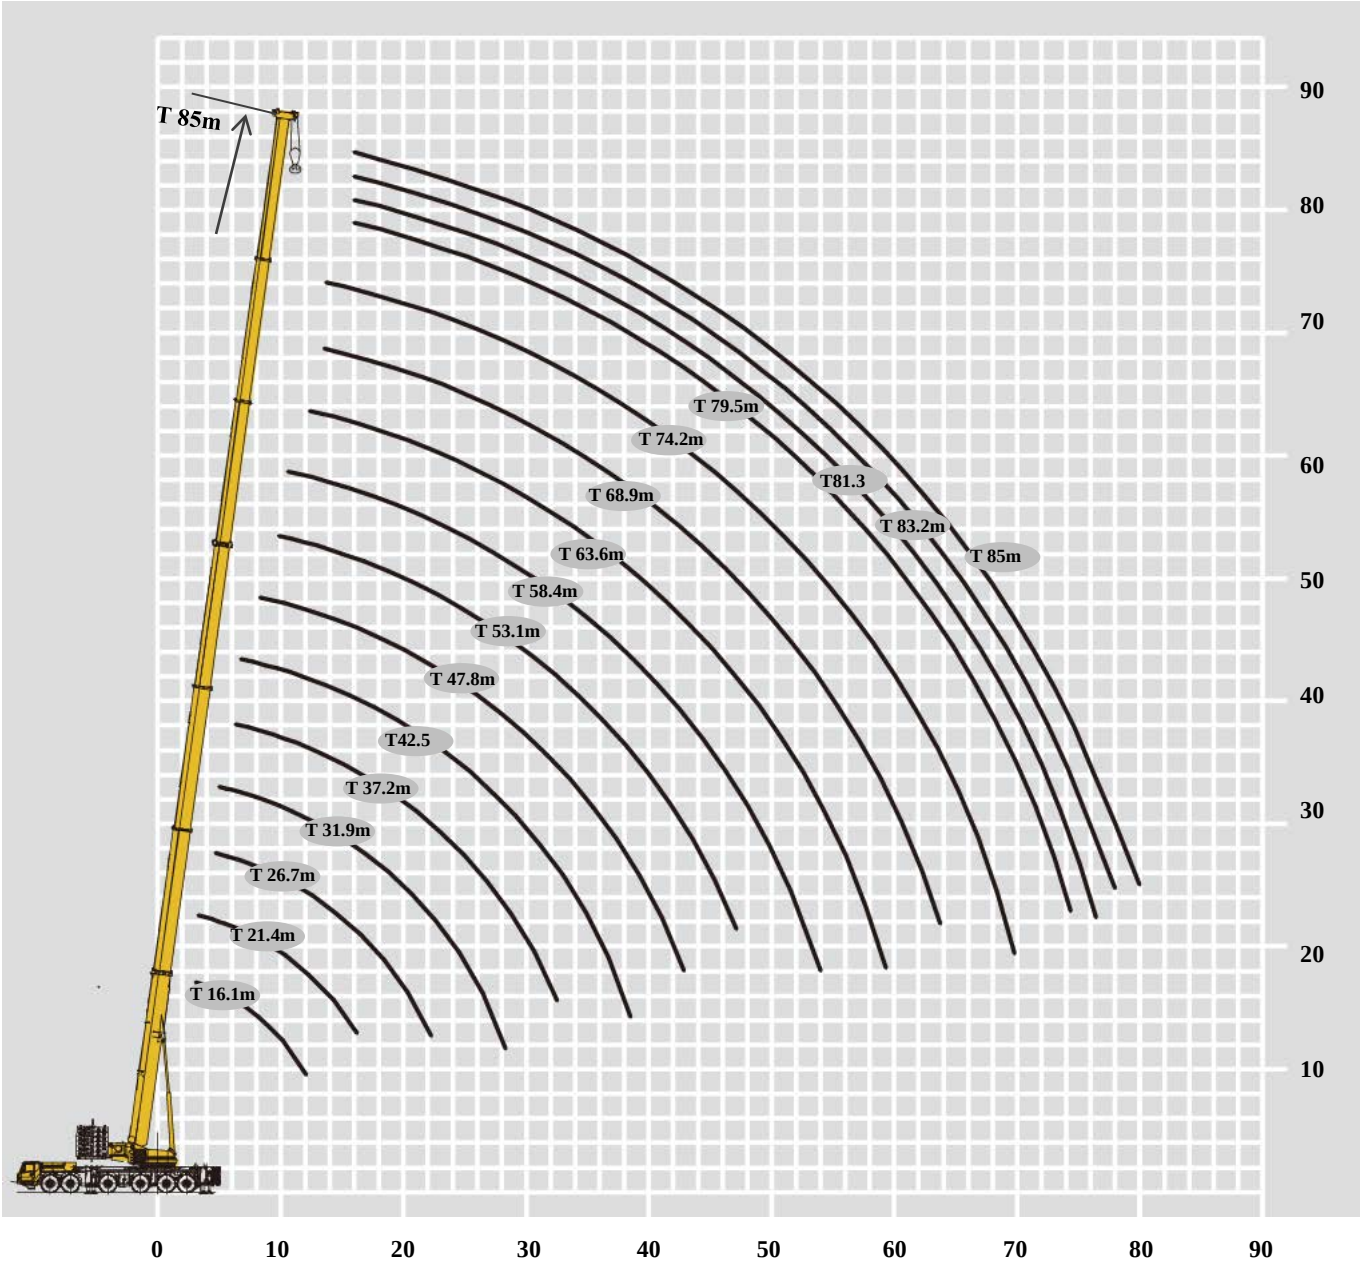
T: 37.2~85m
W: 14m

超起固定副臂 (选装)
Super lifting device + fixed Jib
(optional)

T: 53.1~79.5 m+ 6.5 m
F: 6~42 m

超起变幅副臂 (选装)
Super lifting device+ luffing Jib
(optional)


T: 31.4~57.8 m+ 7m
L: 24~78 m



起重性能表

Rated lifting load table

T 16.1~85m




	16.1	21.4	21.4	21.4	21.4	26.7	26.7	26.7	26.7	26.7	31.9	31.9	31.9	37.2	37.2	
3	500*															3
3.5	225.0	225.0	225.0	225.0	100.9											3.5
4	225.0	225.0	225.0	225.0	95.7	193.3	193.3	193.3	100.1	69.2						4
4.5	222.7	225.0	225.0	225.0	91.1	192.4	191.6	193.0	96.7	65.7	185.9	186.0	185.3			4.5
5	222.9	223.0	222.0	223.0	86.9	192.6	192.6	191.6	93.2	62.2	183.1	182.5	183.6			5
6	204.0	201.0	200.0	199.0	80.0	190.9	189.9	185.9	86.6	56.4	175.9	176.8	171.3	162.2	164.0	6
7	184.0	180.0	179.0	178.0	73.7	177.0	176.0	174.0	80.6	51.4	168.0	168.0	161.7	155.0	156.4	7
8	167.0	163.0	162.0	161.0	69.0	151.9	159.0	158.0	75.3	47.4	155.0	154.0	141.3	148.3	147.9	8
9	152.0	149.0	148.0	147.0	64.2	144.0	145.0	144.0	70.6	43.9	142.0	141.0	123.3	139.5	138.5	9
10	134.5	134.3	133.3	132.3	60.4	132.0	134.0	132.0	66.7	40.7	130.0	129.0	113.2	125.2	127.5	10
12	118.1	114.6	113.6	112.7	53.9	114.9	113.9	111.9	58.6	35.5	109.0	111.0	98.7	100.4	109.0	12
14		97.0	96.0	95.0	48.8	98.0	97.0	95.0	51.5	31.6	92.9	94.5	82.1	90.5	95.3	14
16		83.8	82.8	81.8	45.1	84.3	83.3	81.4	46.2	28.6	82.1	82.0	71.8	81.5	84.6	16
18						75.3	73.0	71.3	41.7	26.0	70.1	71.3	63.3	74.0	72.6	18
20						66.4	64.4	61.5	37.9	23.7	62.8	62.8	56.6	65.6	64.7	20
22						59.4	57.4	55.0	34.8	22.2	55.9	54.9	51.6	58.3	57.7	22
24											50.0	48.9	49.0	54.3	50.8	24
26											44.8	44.1	44.1	49.5	45.8	26
28											38.8	38.9	37.5	44.1	42.8	28
30														40.4	34.4	30
32														37.1	35.5	32
组合 Code	000000	001000	010000	100000	000001	001100	011000	110000	000011	000002	111000	120000	210000	011110	111100	组合 Code
倍率 n	20	20	20	20	9	17	17	17	9	6	16	16	16	14	14	倍率 n

*表示起重能力等级。
Note: the lifting load with a * lifting capacity class.

起重性能表
Rated lifting load table

T 16.1~85m




	37.2	42.5	42.5	42.5	47.8	47.8	47.8	53.1	53.1	53.1	58.4	58.4	63.6	63.6	63.6	
6	144.3															6
7	136.3	108.5	124.1	110.3												7
8	124.4	101.5	117.5	104.7	80.6	104.1	104.2									8
9	110.0	95.1	110.6	99.8	74.8	100.9	100.6	61.8	68.3	71.4						9
10	100.9	90.7	105.6	94.4	69.5	95.1	96.3	59.1	64.8	68.5	44.1	57.0				10
12	84.3	83.3	95.0	84.3	59.9	86.7	82.0	53.1	59.1	62.8	40.0	50.5	39.8	40.8	46.7	12
14	73.9	74.4	87.2	68.7	52.9	77.1	72.7	48.2	55.0	58.4	36.7	45.1	37.9	38.8	45.6	14
16	64.7	66.6	80.5	60.4	46.9	69.5	59.5	44.1	51.0	54.0	33.7	41.4	36.2	37.6	41.9	16
18	57.1	61.0	73.6	53.8	42.4	63.5	53.1	41.1	46.1	50.7	30.5	38.0	32.8	34.9	40.0	18
20	51.4	56.2	65.7	48.6	38.1	56.6	47.7	37.9	42.6	47.8	28.6	35.4	30.4	32.3	36.7	20
22	45.7	51.6	58.7	43.8	34.6	51.9	43.2	35.2	40.3	45.1	27.0	33.7	28.3	29.7	35.0	22
24	40.8	47.6	53.7	40.1	32.1	48.1	39.6	33.1	38.3	42.1	25.2	31.2	26.5	28.5	32.9	24
26	38.0	44.1	47.7	36.2	29.6	44.2	37.2	31.2	35.9	39.7	23.6	29.8	24.8	26.5	31.5	26
28	33.8	41.1	42.8	32.5	26.9	40.0	32.6	29.3	30.7	36.4	22.4	28.7	23.2	25.2	29.3	28
30	31.2	38.1	39.5	29.6	25.3	38.2	29.1	27.7	30.2	33.0	21.3	26.8	21.6	23.3	27.8	30
32	30.9	35.3	36.2	27.3	23.6	34.7	26.4	26.1	28.4	30.5	20.3	25.2	20.7	22.0	26.5	32
34		33.2	33.4	26.1	21.9	32.0	24.8	25.5	26.5	28.3	19.4	23.6	19.6	21.4	24.9	34
36		30.9	31.0	24.8	20.6	30.2	23.0	23.7	25.4	26.2	18.5	22.1	18.5	20.1	23.6	36
38		27.5	27.5	22.2	19.3	27.5	21.3	23.0	23.5	24.5	17.6	20.8	17.5	19.3	22.3	38
40					18.1	26.5	20.2	22.2	22.8	23.1	16.9	19.5	16.7	18.2	20.7	40
42					17.2	25.7	20.2	21.9	21.6	21.3	15.9	18.9	15.6	17.3	19.9	42
44								21.0	20.1	19.9	15.3	17.8	15.2	16.4	19.4	44
46								20.9	18.7	18.9	14.6	16.7	14.5	15.7	18.0	46
48											14.0	15.6	13.8	15.0	17.0	48
50											13.5	15.0	13.1	14.4	15.9	50
52											12.8	14.0	12.7	13.5	14.8	52
54													12.1	12.9	14.0	54
56													11.6	11.9	13.1	56
58													11.1	11.3	12.1	58
组合 Code	211000	011111	111110	211100	021111	111111	211110	111112	111211	211111	111122	221111	111222	211122	221112	组合 Code
倍率 n	13	9	11	10	7	9	9	5	6	6	4	5	4	4	4	倍率 n

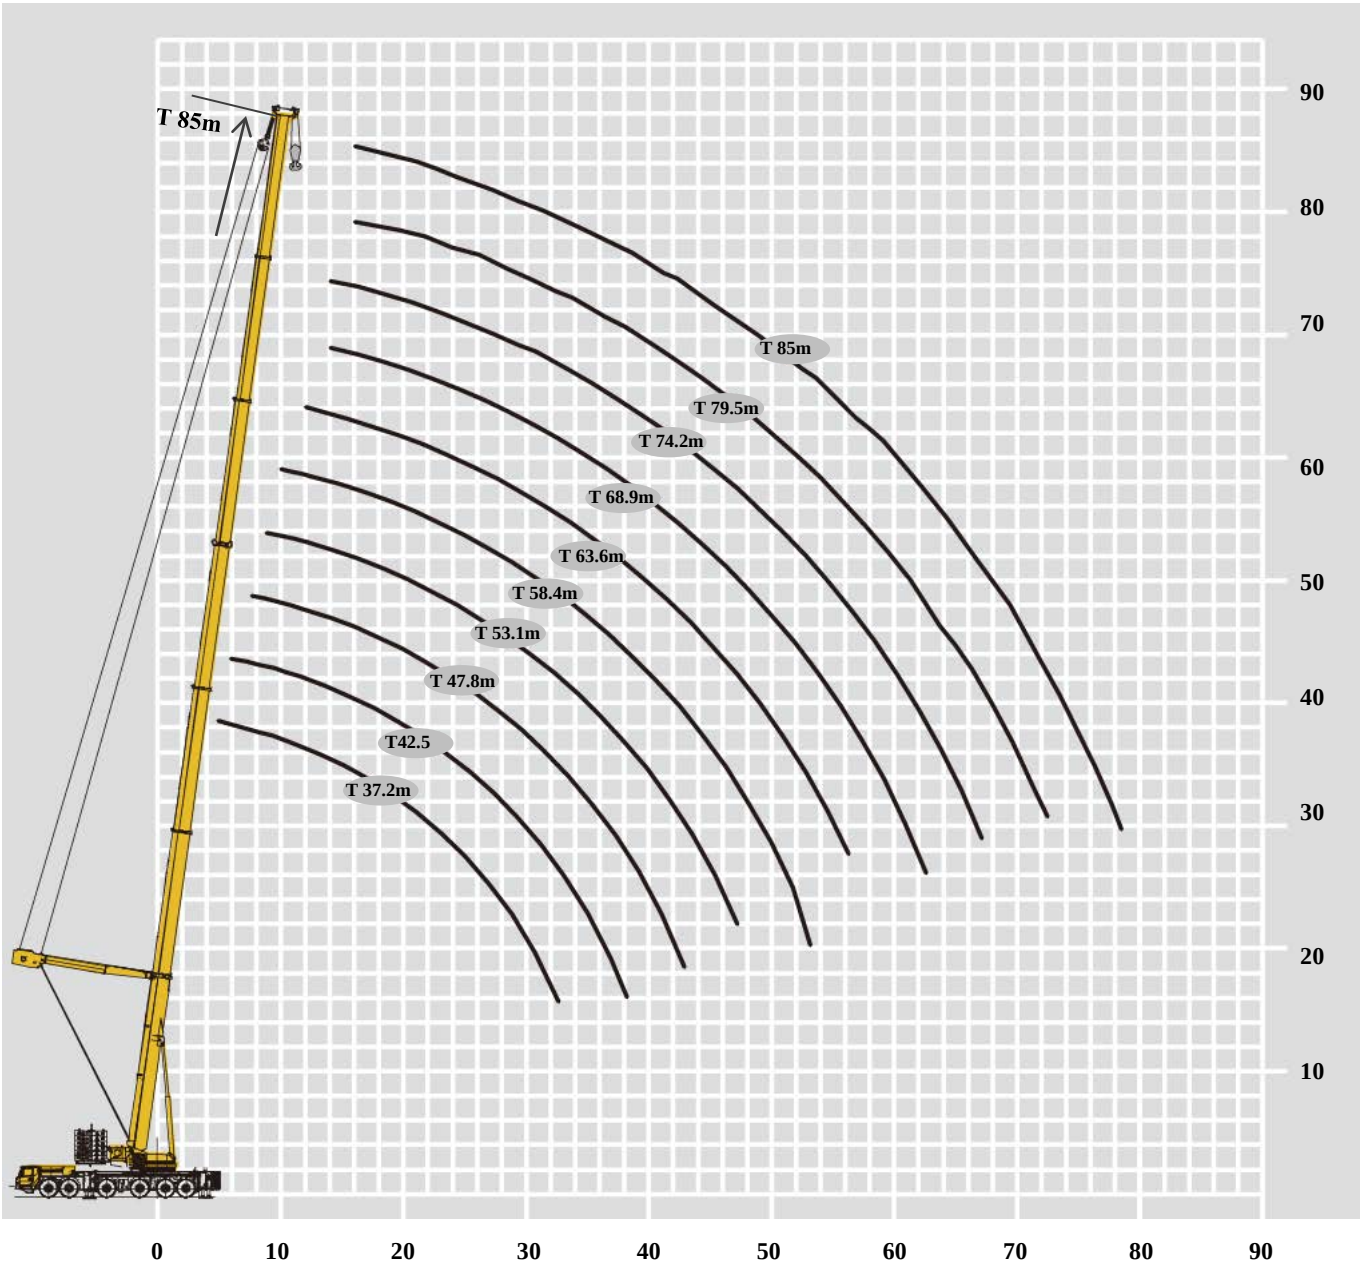
起重性能表

Rated lifting load table



T 16.1~85m



	63.6	68.9	68.9	74.2	74.2	79.5	81.3	81.3	83.2	83.2	85	
12	48.2											12
14	45.3	32.5	39.2	33.8	34.0							14
16	42.9	29.6	37.8	32.2	32.2	28.4	24.7	24.8	23.4	23.5	21.0	16
18	39.7	28.2	35.3	29.9	30.5	27.3	24.0	23.9	22.4	22.6	21.0	18
20	37.5	27.3	33.5	26.8	27.8	26.4	23.1	23.1	21.6	21.8	20.8	20
22	35.2	26.5	31.6	24.9	24.7	25.0	22.1	22.4	20.6	20.7	19.9	22
24	32.8	25.3	30.0	22.7	22.5	24.0	21.3	21.9	19.8	20.3	19.3	24
26	31.5	23.7	28.8	21.4	21.3	22.9	21.4	21.7	19.6	19.9	18.5	26
28	29.2	21.7	27.3	20.3	20.7	21.9	20.8	20.8	19.5	19.7	18.1	28
30	27.7	20.4	25.5	18.9	19.6	20.8	19.8	20.0	18.6	18.9	17.5	30
32	25.4	19.3	23.7	18.0	18.6	19.7	19.2	19.1	18.1	17.9	16.5	32
34	23.9	18.2	22.1	15.4	18.0	18.6	18.1	18.2	17.3	17.2	15.8	34
36	22.3	17.3	20.5	14.7	17.8	17.5	17.2	17.5	16.5	16.6	15.2	36
38	21.3	16.4	19.4	13.8	16.5	16.4	16.1	16.7	15.9	15.8	14.5	38
40	20.2	15.5	18.3	13.3	15.5	15.8	15.6	15.6	15.1	15.1	13.5	40
42	19.0	14.8	17.3	12.9	14.9	14.9	14.8	15.1	14.3	14.3	12.8	42
44	17.4	14.0	16.4	12.0	14.3	14.1	14.3	14.0	13.3	13.4	12.0	44
46	16.6	14.0	15.6	11.7	13.9	13.1	13.0	12.9	12.8	12.9	11.3	46
48	15.8	12.8	14.2	11.3	13.3	12.1	12.5	12.3	12.1	12.1	10.7	48
50	15.0	12.4	12.9	10.9	12.6	11.2	11.5	11.3	11.3	11.2	10.2	50
52	13.8	11.6	11.3	10.3	11.8	10.6	10.6	10.8	10.6	10.6	9.6	52
54	13.0	11.1	10.6	10.0	11.5	10.1	10.1	10.1	9.8	9.9	8.9	54
56	12.3	10.7	10.2	9.7	11.1	9.3	9.3	9.4	9.2	9.3	8.6	56
58	11.1	10.0	9.6	9.3	10.7	8.7	8.9	9.1	8.7	8.7	8.0	58
60		9.6	8.8	9.4	10.6	8.1	8.2	8.2	7.9	8.2	7.5	60
62		8.9	8.5	8.7	9.9	7.3	7.6	7.8	7.4	7.4	7.2	62
64		7.8	6.7	8.3	9.9	6.9	7.0	7.0	7.1	6.9	6.7	64
66				7.9	9.5	6.4	6.7	6.5	6.4	6.3	6.2	66
68				7.7	8.8	5.7	6.0	6.0	6.0	5.9	5.8	68
70				7.2	7.7	5.2	5.7	5.6	5.4	5.5	5.3	70
72						4.8	5.1	5.0	5.0	4.8	4.7	72
74						4.2	4.4	4.5	4.3	4.4	4.4	74
76							4.0	3.9	3.5	3.6	3.5	76
78									2.2	2.1	3.2	78
80											2.2	80
组合 Code	222111	112222	222211	122222	222221	222222	222233	332222	223333	333322	333333	组合 Code
倍率 n	4	3	4	3	3	3	2	2	2	2	2	倍率 n

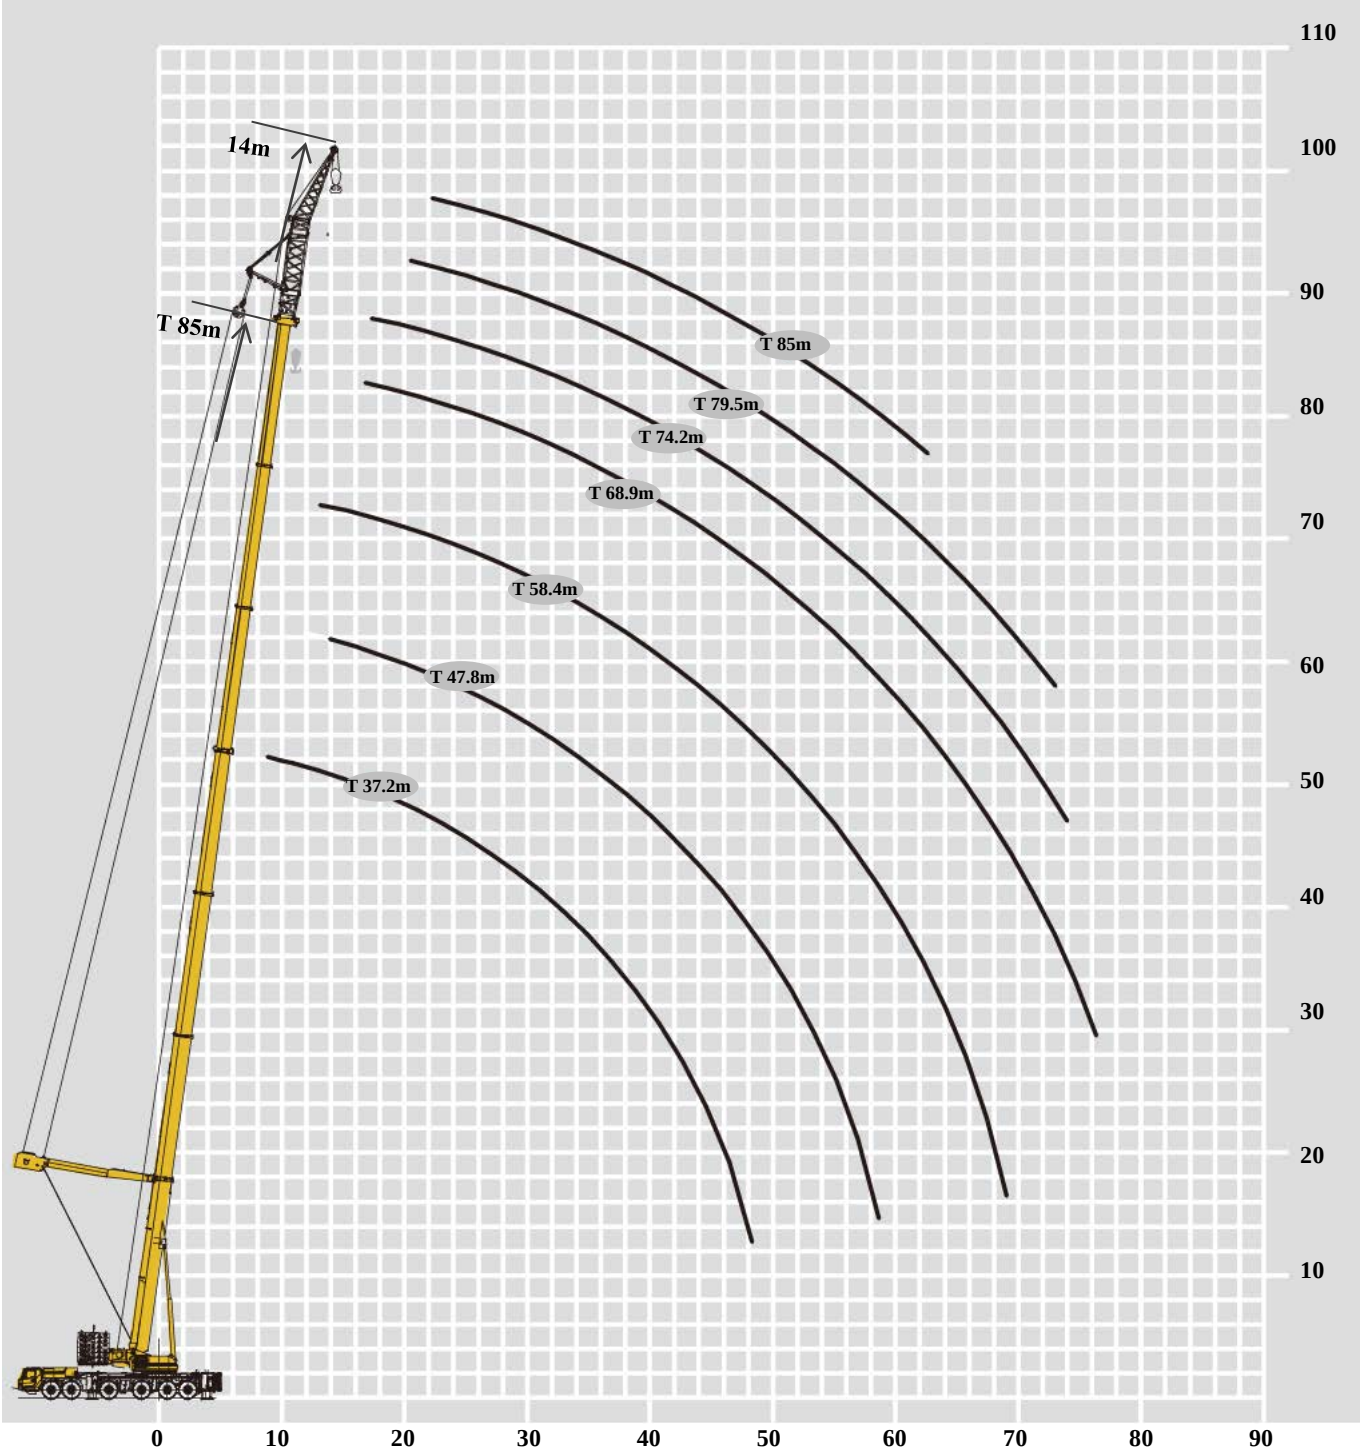






	37.2	42.5	42.5	47.8	53.1	53.1	58.4	58.4	
6	161.6								6
7	160.6	139.0	139.0						7
8	145.9	138.3	139.3	126.7	108.1	103.1			8
9	139.0	131.1	130.2	126.9	105.2	102.6			9
10	121.6	120.7	118.8	117.8	102.9	102.7	100.3	92.7	10
12	103.6	103.7	101.7	104.7	100.7	98.8	95.6	91.3	12
14	90.5	92.3	88.4	92.9	88.4	86.5	87.4	84.6	14
16	78.9	80.5	77.9	80.3	77.9	76.0	77.0	75.1	16
18	70.3	70.3	68.4	70.7	69.4	67.5	69.4	66.5	18
20	61.8	63.7	60.8	61.8	61.8	60.8	61.8	59.9	20
22	54.9	56.7	54.2	56.1	56.1	54.2	56.1	54.2	22
24	49.4	51.2	47.5	49.4	51.3	49.4	54.0	51.0	24
26	43.8	45.5	42.8	44.7	45.6	44.7	49.0	47.0	26
28	40.8	42.4	38.0	39.9	41.8	39.9	45.0	42.0	28
30	36.0	38.9	34.2	36.1	38.0	36.1	41.0	38.0	30
32	32.4	34.7	31.4	33.3	34.2	32.3	37.0	35.0	32
34		32.0	28.5	30.4	31.4	29.5	34.0	31.0	34
36		29.0	25.7	28.0	28.5	27.6	31.0	29.0	36
38		23.3	19.4	25.8	26.6	24.7	29.0	26.0	38
40				23.7	24.7	22.8	27.0	24.0	40
42				20.8	22.8	20.9	25.0	22.0	42
44					20.9	19.0	23.0	20.0	44
46					19.0	17.1	21.0	18.0	46
48							20.0	16.7	48
50							18.0	15.0	50
52							15.3	12.6	52
组合 Code	011110	011111	111110	111111	111112	211111	111122	221111	组合 Code
倍率 n	14	12	12	11	9	9	9	8	倍率 n


37.2-85m 9.4m×9.6m 360° 153 t SL									
	63.6	63.6	68.9	68.9	74.2	74.2	79.5	85	
12	95.4	94.7							12
14	86.5	83.6	81.1	82.7	71.7	72.3			14
16	76.0	74.1	74.3	73.2	70.3	71.7	65.2	52.0	16
18	68.4	65.6	67.5	65.6	65.1	64.6	60.6	50.1	18
20	61.8	58.9	60.8	58.9	59.9	58.9	57.0	47.6	20
22	56.1	53.2	55.1	53.2	54.2	53.2	53.2	45.0	22
24	50.4	48.5	50.4	48.5	49.4	48.5	48.5	42.7	24
26	46.6	43.7	45.6	43.7	45.6	43.7	43.7	40.7	26
28	42.8	39.9	44.0	39.9	41.8	40.9	40.9	38.6	28
30	40.0	38.0	40.0	38.0	37.1	36.1	38.0	35.2	30
32	37.0	34.0	37.0	34.0	34.2	33.3	35.0	32.3	32
34	34.0	31.0	34.0	32.0	31.4	30.4	32.0	30.4	34
36	32.0	29.0	31.0	29.0	29.5	27.6	30.0	27.6	36
38	29.0	26.0	29.0	27.0	26.6	25.7	27.0	25.7	38
40	27.0	24.0	27.0	25.0	24.7	23.8	25.0	25.0	40
42	25.0	22.0	25.0	23.0	22.8	21.9	24.0	23.0	42
44	23.0	20.0	23.0	21.0	21.9	20.0	22.0	22.0	44
46	22.0	19.0	22.0	19.0	20.0	19.0	20.0	20.0	46
48	20.0	17.0	20.0	18.0	19.0	17.1	19.0	19.0	48
50	19.0	15.6	19.0	16.0	17.1	16.2	18.0	18.0	50
52	17.0	14.0	17.0	14.9	16.2	15.1	16.0	16.0	52
54	16.0	12.7	16.0	13.5	15.2	13.7	15.0	15.0	54
56	14.5	11.4	14.9	12.2	14.0	12.5	14.0	14.0	56
58			13.7	11.0	12.8	11.4	13.0	13.0	58
60			12.6	9.9	11.8	10.3	11.8	12.0	60
62			10.9	8.3	10.8	9.3	10.8	11.0	62
64					9.8	8.4	9.8	10.1	64
66					9.0	7.5	8.9	9.2	66
68							8.1	8.3	68
70							7.2	7.5	70
72							6.3	6.8	72
74								6.1	74
76								5.4	76
78								4.1	78
组合 Code	011110	011111	111110	111111	111112	211111	111122	221111	组合 Code
倍率 n	8	8	7	7	6	6	6	5	倍率 n

起升高度曲线图
Lifting height chart

主臂+风电臂
Boom + Wind power jib



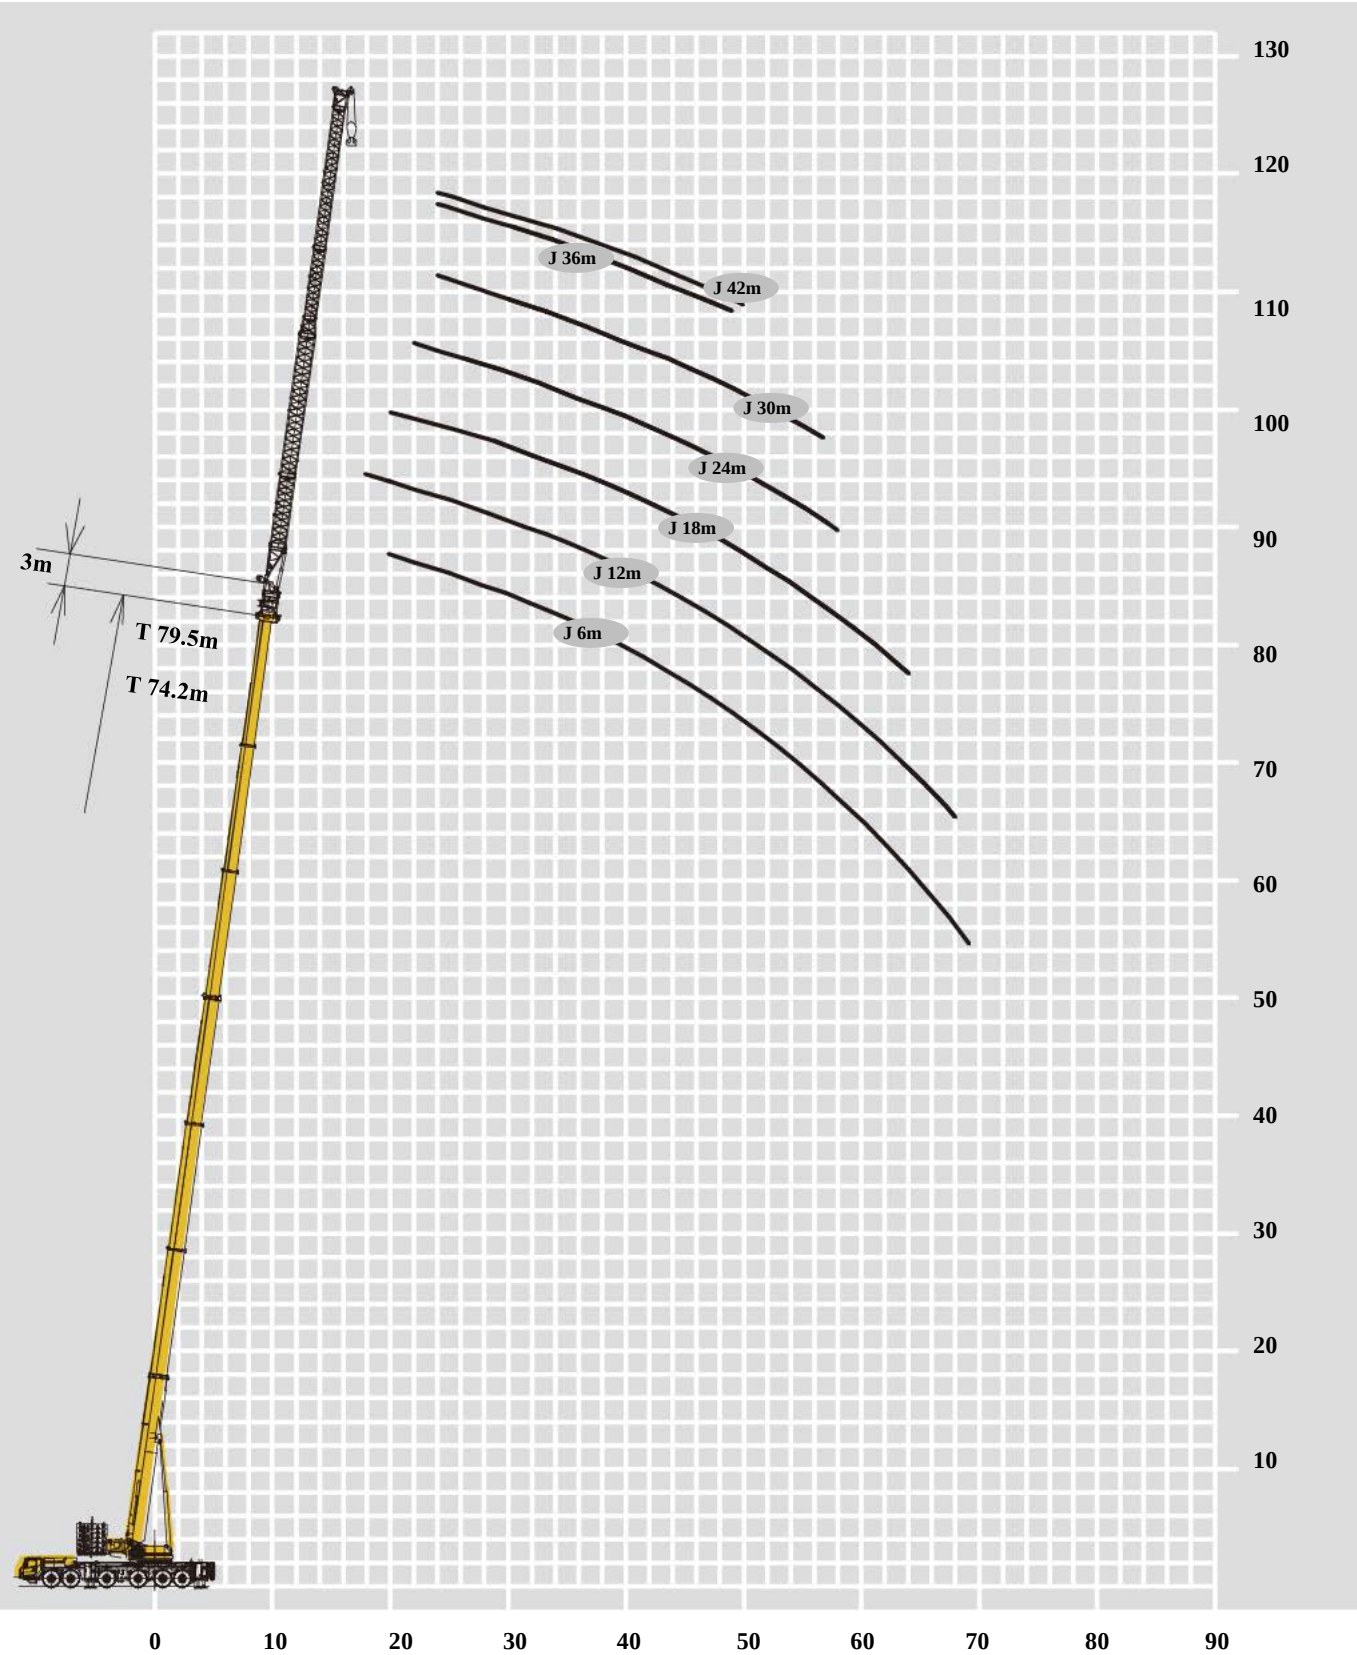
     								
	37.2	47.8	58.4	68.9	74.2	79.5	85	
	14m	14m	14m	14m	14m	14m	14m	
8	100.7							8
9	96.8							9
10	93.0							10
12	86.8	89.4						12
14	81.8	84.7	76.0	66.0				14
16	76.5	75.5	73.4	62.6	58.7	47.8		16
18	69.4	67.3	66.3	57.8	52.5	46.1		18
20	62.2	61.2	60.2	52.3	49.0	44.2	37.9	20
22	56.1	56.1	54.1	46.8	44.7	41.0	34.9	22
24	52.0	51.0	50.0	41.5	40.3	36.8	32.0	24
26	46.9	46.9	45.9	37.2	37.7	32.6	28.8	26
28	43.9	42.8	41.8	34.3	34.2	28.4	26.1	28
30	39.8	39.8	38.8	30.5	30.0	25.3	22.6	30
32	36.7	35.7	35.7	27.5	27.6	23.0	19.8	32
34	33.7	33.7	32.6	25.6	24.5	20.7	16.8	34
36	30.6	30.6	29.6	22.8	21.5	19.2	15.2	36
38	28.6	28.6	27.5	21.0	19.5	17.7	13.2	38
40	26.5	26.5	25.5	19.2	17.5	16.2	12.4	40
42	24.5	24.5	23.5	17.4	16.4	13.9	11.0	42
44	22.4	22.4	22.4	16.5	14.6	11.9	9.7	44
46	21.4	22.0	21.0	15.2	13.1	10.6	8.9	46
48	14.6	20.0	20.0	14.4	12.1	8.7	7.8	48
50		18.9	17.9	12.7	11.1	7.6	7.1	50
52		17.5	16.8	11.9	9.6	7.5	6.5	52
54		15.8	15.8	11.0	8.6	7.0	5.8	54
56		14.3	14.4	10.1	7.8	6.6	4.8	56
58		10.0	13.1	9.1	6.9	6.2	4.1	58
60			12.0	8.2	6.2	5.8	3.4	60
62			10.9	7.5	5.6	5.0	2.7	62



	37.2	47.8	58.4	68.9	74.2	79.5	85	
	14m	14m	14m	14m	14m	14m	14m	
64			9.9	6.6	4.9	4.4	2.2	64
66			8.8	5.9	4.3	3.8		66
68			5.9	5.3	3.8	3.3		68
70				4.6	3.3	2.7		70
72				4.0	2.8	2.3		72
74				3.5	2.3			74
76				2.9				76
组合 Code	000022	000222	002222	022222	122222	222222	333333	组合 Code
倍率 n	8	7	6	6	5	4	3	倍率 n

起升高度曲线图
Lifting height chart






主臂+副臂
Boom + Jib



起重性能表

Rated lifting load table






T 16.1~74.2m

m m							
16.1-74.2 m 3 m 42 m 9.4×9.6m 360° 153 t							
m 16.1+3 m 53.1+3 m 58.4+3 m 63.6+3 m 68.9+3 m 74.2+3 m m							
m 0° m							
m 42 m m							
10	16.2						10
12	13.8						12
14	12.0						14
16	11.0						16
18	9.9	10.4					18
20	8.8	10.4	9.2				20
22	7.9	9.9	9.2	8.3	7.0		22
24	7.3	9.5	9.2	8.3	7.0	4.9	24
26	6.6	9.1	8.9	8.3	7.0	4.9	26
28	6.1	8.8	8.5	8.1	7.0	4.9	28
30	5.6	8.4	8.2	7.8	7.0	4.9	30
32	5.2	8.1	7.9	7.5	6.9	4.9	32
34	4.8	7.6	7.5	7.3	6.7	4.9	34
36	4.4	7.3	7.3	7.0	6.2	4.9	36
38	4.2	6.9	7.0	6.7	5.6	4.4	38
40	3.9	6.5	6.7	6.3	5.1	4.0	40
42	3.7	6.1	6.4	5.9	4.6	3.6	42
44	3.4	5.8	6.1	5.2	4.2	3.2	44
46	3.1	5.6	5.9	4.8	3.8	2.9	46
48	3.0	5.4	5.6	4.4	3.3	2.6	48
50	2.8	5.1	5.3	4.0	3.0	2.2	50
52	2.6	4.9	4.9	3.6	2.7		52
54	2.5	4.7	4.6	3.4	2.4		54
56	2.4	4.5	4.2	3.0	2.1		56
58		4.2	4.0	2.8			58
60		4.1	3.6	2.5			60
62		3.9	3.3	2.3			62
64		3.7	3.1	2.0			64
66		3.6	2.9				66
68		3.4	2.6				68
70		3.3	2.3				70
72		3.1	2.1				72
74		3.0					74
76		2.9					76
78		2.6					78
80		2.5					80
82		2.4					82
84		2.1					84
组合 Code	000000	211111	221111	222111	222211	222221	组合 Code
倍率 n	2	1	1	1	1	1	倍率 n

起重性能表

Rated lifting load table


T 16.1~79.5m

	 16.1-79.5 m T	 3 m V	 36 m F	 9.4×9.6m	 360°	 153 t									
	16.1+3 m		53.1+3 m		58.4+3 m		63.6+3 m		68.9+3 m		74.2+3 m		79.5+3 m		
	0°														
	36 m														
9	19.7													9	
10	18.6													10	
12	15.9													12	
14	13.9													14	
16	12.2	12.6												16	
18	11.0	12.6	11.7											18	
20	10.3	12.1	11.7	10.2	8.4									20	
22	9.4	11.7	11.2	10.2	8.4	6.1								22	
24	8.5	11.1	10.8	10.2	8.4	6.1	4.2							24	
26	7.8	10.8	10.5	9.9	8.4	6.1	4.2							26	
28	7.2	10.4	10.1	9.6	8.4	6.1	4.2							28	
30	6.6	9.8	9.7	9.2	8.3	6.0	4.2							30	
32	6.2	9.3	9.4	9.0	7.8	6.0	4.2							32	
34	5.7	8.9	9.0	8.6	7.2	5.9	4.2							34	
36	5.3	8.5	8.5	7.9	6.6	5.4	4.1							36	
38	5.0	8.0	8.2	7.3	5.9	4.9	4.0							38	
40	4.7	7.6	7.8	6.6	5.3	4.5	3.7							40	
42	4.4	7.2	7.4	6.1	4.9	4.1	3.2							42	
44	4.2	6.8	7.0	5.7	4.5	3.7	2.9							44	
46	3.9	6.5	6.7	5.1	4.1	3.3	2.6							46	
48	3.7	6.2	6.3	4.7	3.7	2.9	2.3							48	
50	3.5	6.0	5.7	4.4	3.3	2.6								50	
52		5.7	5.3	4.0	3.1	2.4								52	
54		5.4	5.1	3.6	2.7	2.1								54	
56		5.2	4.6	3.4	2.5									56	
58		5.0	4.3	3.1	2.2									58	
60		4.8	3.9	2.8	2.0									60	
62		4.6	3.7	2.4										62	
64		4.4	3.4	2.2										64	
66		4.1	3.2	2.0										66	
68		4.0	2.9											68	
70		3.9	2.7											70	
72		3.7	2.4											72	
74		3.4	2.2											74	
76		3.2	2.0											76	
78		3.1												78	
80		2.9												80	
82		2.6												82	
84		2.4												84	
组合 Code	000000	211111	221111	222111	222211	222221	222222	组合 Code							
倍率 n	2	1	1	1	1	1	1	倍率 n							

起重性能表

Rated lifting load table

T 16.1~79.5m



 m	16.1+3 m	53.1+3 m	58.4+3 m	63.6+3 m	68.9+3 m	74.2+3 m	79.5+3 m	 m
	0°							
	30 m							
8	23.2							8
9	21.4							9
10	20.1							10
12	17.3							12
14	15.1							14
16	13.4	15.3						16
18	12.0	15.3	14.0	12.7				18
20	10.9	14.6	14.0	12.7	10.1			20
22	10.2	14.0	13.5	12.7	10.1	7.5		22
24	9.4	13.4	13.0	12.2	10.1	7.5	5.4	24
26	8.6	12.7	12.5	11.9	10.1	7.5	5.4	26
28	7.9	11.9	12.0	11.6	9.8	7.5	5.4	28
30	7.4	11.2	11.5	10.9	9.1	7.4	5.4	30
32	6.9	10.6	10.9	10.1	8.3	7.2	5.4	32
34	6.5	10.0	10.3	9.3	7.7	6.4	5.3	34
36	6.0	9.5	9.7	8.5	7.1	5.9	5.1	36
38	5.6	9.1	9.3	7.9	6.4	5.3	4.6	38
40	5.3	8.6	8.9	7.3	5.8	4.9	4.2	40
42	5.0	8.2	8.3	6.7	5.4	4.5	3.8	42
44	4.8	7.8	7.8	6.2	5.0	4.1	3.4	44
46		7.5	7.3	5.6	4.6	3.7	3.1	46
48		7.1	6.7	5.2	4.1	3.4	2.9	48
50		6.9	6.2	4.8	3.7	3.0	2.5	50
52		6.6	5.8	4.5	3.5	2.8	2.3	52
54		6.4	5.4	4.2	3.1	2.5	2.1	54
56		6.1	5.1	3.8	2.9	2.3		56
58		5.8	4.7	3.6	2.7	2.1		58
60		5.6	4.3	3.2	2.2			60
62		5.4	4.1	2.9	2.0			62
64		5.2	3.8	2.7				64
66		5.0	3.5	2.5				66
68		4.7	3.2	2.3				68
70		4.3	3.0	2.1				70
72		4.1	2.6					72
74		3.9	2.3					74
76		3.6	2.0					76
78		3.4						78
组合 Code	000000	211111	221111	222111	222211	222221	222222	组合 Code
倍率 n	2	2	2	1	1	1	1	倍率 n

起重性能表


Rated lifting load table

T 16.1~79.5m

16.1-79.5 m T 3 m V 24m F 9.4×9.6m 360° 153 t								
m	16.1+3 m	53.1+3 m	58.4+3 m	63.6+3 m	68.9+3 m	74.2+3 m	79.5+3 m	m
	0°							
	24m							
7	30.9							7
8	28.1							8
9	25.9							9
10	23.9							10
12	20.9							12
14	18.5							14
16	16.4	19.5						16
18	14.7	18.5	17.7	16.0	12.4			18
20	13.2	17.4	16.9	16.0	12.4	8.9		20
22	12.1	16.4	16.0	15.3	12.4	8.9	6.6	22
24	11.2	15.5	15.3	14.7	12.3	8.9	6.6	24
26	10.6	14.5	14.6	13.7	11.9	8.9	6.6	26
28	10.0	13.7	13.9	12.5	10.7	8.9	6.6	28
30	9.3	13.0	13.1	11.6	9.7	8.2	6.5	30
32	8.7	12.3	12.4	10.6	9.0	7.6	6.5	32
34	8.2	11.6	11.9	9.8	8.2	6.8	5.9	34
36	7.7	11.1	10.8	8.9	7.5	6.3	5.5	36
38	7.2	10.6	10.1	8.3	6.9	5.8	5.1	38
40		10.1	9.4	7.7	6.4	5.4	4.6	40
42		9.6	8.8	7.0	5.9	4.9	4.2	42
44		9.0	8.2	6.6	5.5	4.5	3.8	44
46		8.8	7.7	6.2	5.0	4.0	3.5	46
48		8.4	7.2	5.6	4.6	3.8	3.2	48
50		8.0	6.7	5.2	4.2	3.4	3.0	50
52		7.7	6.2	4.8	3.9	3.2	2.6	52
54		7.4	5.7	4.5	3.6	2.8	2.4	54
56		7.1	5.5	4.2	3.3	2.6	2.2	56
58		6.8	5.1	3.9	3.0	2.4	2.0	58
60		6.5	4.9	3.5	2.8	2.2		60
62		6.0	4.4	3.3	2.6	2.0		62
64		5.7	4.2	3.1	2.3			64
66		5.5	4.0	2.9	2.1			66
68		5.0	3.7	2.7				68
70		4.8	3.1	2.4				70
72		4.6	2.8	2.1				72
74			2.4					74
76			2.1					76
组合 Code	000000	211111	221111	222111	222211	222221	222222	组合 Code
倍率 n	3	2	2	2	1	1	1	倍率 n

起重性能表
Rated lifting load table

T 16.1~79.5m




 m	16.1+3 m	53.1+3 m	58.4+3 m	63.6+3 m	68.9+3 m	74.2+3 m	79.5+3 m	 m
	0°							
	18 m							
6	39.4							6
7	35.5							7
8	32.3							8
9	29.9							9
10	27.5							10
12	24.0							12
14	21.4	25.0						14
16	19.4	23.6	22.5					16
18	17.4	22.2	21.3	18.7	14.8	11.3		18
20	15.8	20.7	20.1	18.7	14.8	11.3	8.1	20
22	14.6	19.4	19.1	17.5	14.8	11.3	8.1	22
24	13.3	18.2	18.1	15.9	13.7	11.3	8.1	24
26	12.4	17.0	17.3	14.4	12.5	10.8	8.1	26
28	11.6	16.3	16.0	13.2	11.2	9.8	8.1	28
30	10.9	15.3	14.7	12.1	10.5	8.9	7.6	30
32	10.5	14.5	13.4	11.3	9.4	8.2	7.1	32
34	10.1	13.9	12.6	10.3	8.8	7.6	6.5	34
36		13.1	11.7	9.5	8.0	7.0	6.1	36
38		12.6	10.9	8.8	7.4	6.4	5.5	38
40		12.0	10.1	8.2	6.8	5.9	5.1	40
42		11.4	9.4	7.7	6.4	5.5	4.7	42
44		11.0	9.0	7.1	6.0	5.1	4.3	44
46		10.4	8.2	6.6	5.4	4.7	4.0	46
48		9.8	7.8	6.2	5.0	4.3	3.7	48
50		9.3	7.3	5.8	4.8	4.0	3.4	50
52		8.8	6.9	5.4	4.3	3.6	3.1	52
54		8.4	6.5	4.9	4.0	3.5	2.9	54
56		7.9	6.1	4.7	3.7	3.2	2.7	56
58		7.5	5.6	4.3	3.5	2.9	2.5	58
60		7.0	5.3	4.1	3.1	2.7	2.3	60
62		6.6	4.9	3.6	2.9	2.5	2.1	62
64		6.3	4.6	3.4	2.7	2.3		64
66		5.9	4.4	3.2	2.5	2.1		66
68			3.8	3.0	2.2			68
70			3.3	2.8	2.0			70
72			2.8	2.2				72
组合 Code	000000	211111	221111	222111	222211	222221	222222	组合 Code
倍率 n	3	2	2	2	2	1	1	倍率 n

起重性能表

Rated lifting load table

T 16.1~79.5m







								
	16.1+3 m	53.1+3 m	58.4+3 m	63.6+3 m	68.9+3 m	74.2+3 m	79.5+3 m	
	0°							
	12 m							
5	58.9							5
6	53.5							6
7	49.6							7
8	45.6							8
9	41.7							9
10	38.6							10
12	33.8							12
14	30.0	32.1						14
16	26.7	28.7	27.7	22.8	17.1			16
18	24.0	26.8	26.2	22.8	17.1	13.4	9.7	18
20	21.9	25.1	24.3	20.6	17.1	13.4	9.7	20
22	20.2	23.6	22.0	18.7	16.0	13.4	9.7	22
24	18.9	22.2	20.1	17.1	14.5	12.7	9.7	24
26	17.5	21.0	18.4	15.5	13.2	11.5	9.7	26
28	16.3	19.8	16.9	14.3	12.1	10.5	9.3	28
30		18.7	15.7	13.0	11.1	9.7	8.5	30
32		17.5	14.5	12.2	10.2	8.9	7.8	32
34		16.3	13.4	11.2	9.4	8.1	7.2	34
36		15.3	12.6	10.4	8.7	7.5	6.7	36
38		14.1	11.8	9.5	7.9	6.9	6.2	38
40		13.2	10.9	8.9	7.4	6.5	5.7	40
42		12.4	10.2	8.3	6.8	5.9	5.3	42
44		12.0	9.6	7.7	6.3	5.5	4.9	44
46		11.1	8.9	7.3	5.9	5.1	4.6	46
48		10.7	8.4	6.7	5.5	4.9	4.2	48
50		9.9	8.0	6.2	5.1	4.5	4.0	50
52		9.4	7.4	5.8	4.7	4.1	3.6	52
54		9.0	6.9	5.5	4.4	3.9	3.4	54
56		8.5	6.5	5.2	4.2	3.6	3.2	56
58		8.1	5.8	4.8	3.8	3.2	3.0	58
60		7.6	5.4	4.3	3.6	3.0	2.8	60
62		7.1	4.8	3.8	3.2	2.8	2.6	62
64			4.4	3.4	2.9	2.5	2.4	64
66			4.0	3.1	2.5	2.3	2.2	66
68				2.7	2.2	2.0	2.0	68
70				2.4				70
组合 Code	000000	211111	221111	222111	222211	222221	222222	组合 Code
倍率 n	5	3	3	2	2	1	1	倍率 n

起重性能表

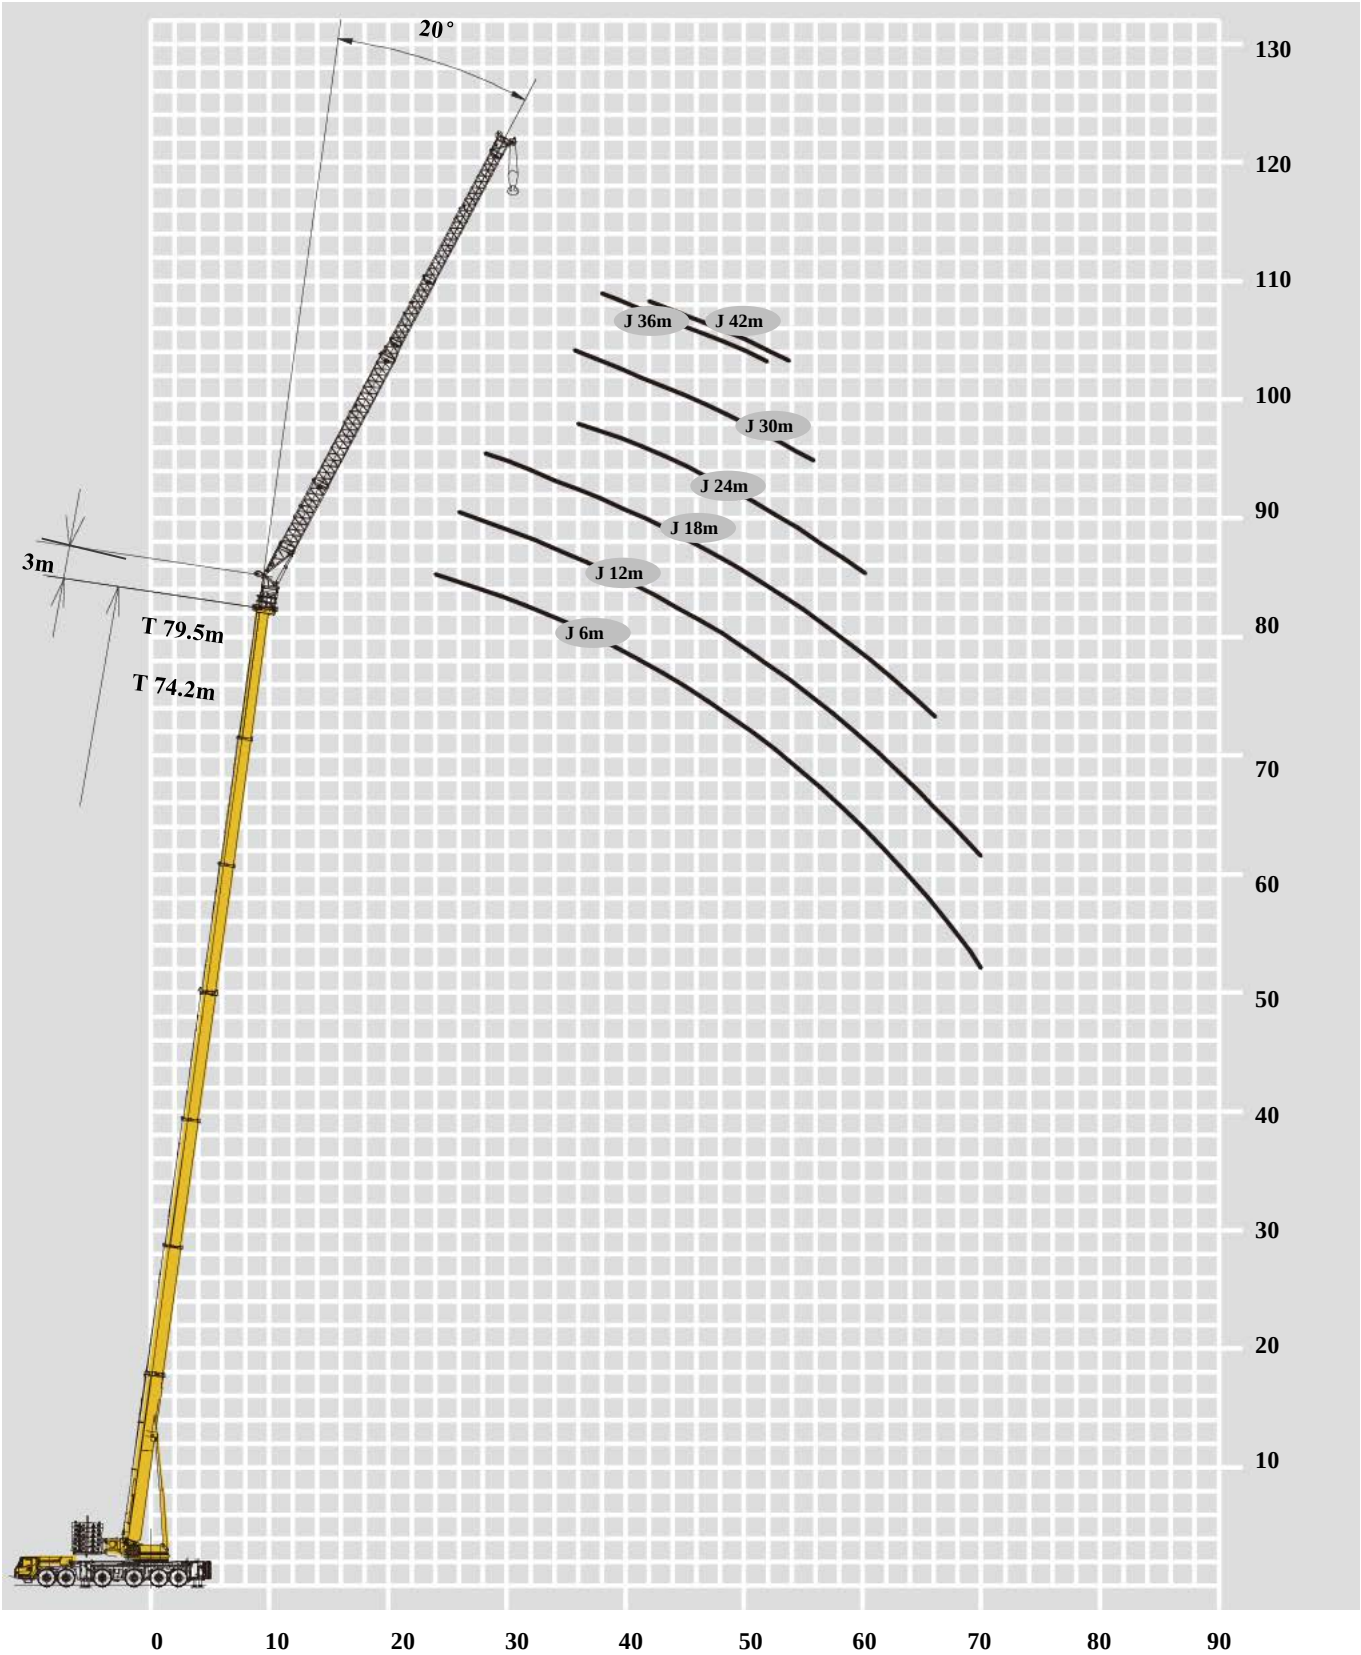
Rated lifting load table

T 16.1~79.5m

									
	16.1+3 m	53.1+3 m	58.4+3 m	63.6+3 m	68.9+3 m	74.2+3 m	79.5+3 m		
	0°								
	6 m								
3	74.0								3
3.5	72.5								3.5
4	70.9								4
4.5	69.6								4.5
5	68.6								5
6	64.5								6
7	59.2								7
8	53.5								8
9	48.9								9
10	44.8								10
12	38.7	44.4							12
14	34.1	40.9	36.7						14
16	30.5	38.0	32.4	26.9					16
18	27.2	34.4	29.0	24.7	21.5				18
20	24.6	31.1	26.0	22.4	19.2	16.2	12.7		20
22	22.9	28.3	23.5	20.1	17.1	15.2	12.7		22
24		25.9	21.7	18.2	15.5	13.8	12.2		24
26		23.8	19.8	16.8	14.4	12.7	11.2		26
28		21.8	18.0	15.4	13.2	11.7	10.0		28
30		20.2	16.7	14.1	11.9	10.7	9.2		30
32		19.0	15.5	13.1	11.1	9.7	8.7		32
34		17.8	14.6	12.1	10.3	9.0	7.9		34
36		16.5	13.4	11.3	9.5	8.4	7.5		36
38		15.4	12.5	10.4	8.7	7.8	6.9		38
40		14.5	11.7	9.6	8.3	7.3	6.5		40
42		13.7	10.9	9.0	7.5	6.8	6.1		42
44		12.8	10.4	8.5	7.1	6.3	5.7		44
46		12.2	9.6	8.0	6.7	5.8	5.3		46
48		11.5	9.2	7.4	6.3	5.4	4.9		48
50		10.9	8.7	6.9	5.8	5.1	4.7		50
52		10.5	8.1	6.5	5.4	4.8	4.2		52
54		9.6	7.7	6.1	5.0	4.5	4.0		54
56		9.2	6.8	5.6	4.8	4.2	3.8		56
58			6.0	5.1	4.4	3.9	3.6		58
60			5.4	4.4	3.9	3.7	3.4		60
62				3.9	3.5	3.2	3.2		62
64				3.4	2.9	2.8	2.8		64
66				3.0	2.6	2.5	2.5		66
68					2.3	2.1	2.0		68
组合 Code	000000	211111	221111	222111	222211	222221	222222	组合 Code	
倍率 n	6	4	3	3	2	2	1	倍率 n	




起升高度曲线图
Lifting height chart

主臂+副臂
Boom + Jib



起重性能表
Rated lifting load table

T 16.1~74.2m

16.1-79.5 m 3 m 42 m 9.4×9.6m 360° 153 t							
m 16.1+3 m 53.1+3 m 58.4+3 m 63.6+3 m 68.9+3 m 74.2+3 m 20° 42 m m							
24	5.4						24
26	5.0						26
28	4.7						28
30	4.3						30
32	4.1	4.7					32
34	3.8	4.7	4.6				34
36	3.6	4.5	4.6				36
38	3.3	4.3	4.4	4.5			38
40	3.1	4.2	4.3	4.4	4.3		40
42	2.9	4.0	4.1	4.2	4.3	3.1	42
44	2.8	3.9	4.0	4.1	4.1	3.1	44
46	2.6	3.7	3.8	3.9	3.9	3.1	46
48	2.5	3.6	3.7	3.8	3.8	2.9	48
50	2.4	3.5	3.6	3.7	3.4	2.6	50
52	2.3	3.4	3.5	3.6	3.1	2.3	52
54	2.2	3.3	3.4	3.5	2.8	2.1	54
56	2.1	3.2	3.3	3.4	2.6		56
58		3.1	3.2	3.2	2.4		58
60		3.0	3.1	3.0	2.2		60
62		2.9	3.0	2.7			62
64		2.8	2.9	2.4			64
66		2.7	2.8	2.2			66
68		2.7	2.8	2.0			68
70		2.6	2.6				70
72		2.6	2.4				72
74		2.5	2.3				74
76		2.4	2.0				76
78		2.4					78
80		2.3					80
82		2.3					82
84		2.2					84
86		2.0					86
组合 Code	000000	211111	221111	222111	222211	222221	组合 Code
倍率 n	1	1	1	1	1	1	倍率 n

起重性能表
Rated lifting load table




T 16.1~79.5m

16.1-79.5 m T 3 m V 36 m F 9.4×9.6m 360° 153 t								
m 16.1+3 m 53.1+3 m 58.4+3 m 63.6+3 m 68.9+3 m 74.2+3 m 79.5+3 m 20° 36 m m								
20	7.6							20
22	7.0							22
24	6.4							24
26	6.0							26
28	5.6	6.5						28
30	5.2	6.5	6.3					30
32	5.0	6.2	6.3					32
34	4.7	6.0	6.1	6.0	5.8			34
36	4.4	5.8	5.9	6.0	5.8	4.2		36
38	4.2	5.5	5.7	5.8	5.8	4.2	2.8	38
40	4.0	5.3	5.5	5.6	5.5	4.2	2.8	40
42	3.7	5.1	5.3	5.5	5.1	4.2	2.8	42
44	3.5	5.0	5.2	5.3	4.7	3.8	2.8	44
46	3.4	4.8	5.0	5.1	4.4	3.6	2.8	46
48	3.3	4.7	4.9	5.0	4.0	3.1	2.5	48
50	3.1	4.5	4.7	4.6	3.7	3.0	2.3	50
52		4.4	4.6	4.4	3.4	2.8	2.0	52
54		4.3	4.5	4.0	3.1	2.4		54
56		4.2	4.4	3.8	2.9	2.2		56
58		4.1	4.3	3.5	2.6	2.0		58
60		4.0	4.2	3.3	2.4			60
62		3.9	4.0	3.0	2.2			62
64		3.8	3.8	2.7				64
66		3.7	3.6	2.5				66
68		3.6	3.3	2.3				68
70		3.5	3.1	2.1				70
72		3.4	2.9					72
74		3.3	2.6					74
76		3.2	2.4					76
78		3.1	2.2					78
80		3.0						80
82		2.7						82
84		2.4						84
86		2.0						86
组合 Code	000000	211111	221111	222111	222211	222221	222222	组合 Code
倍率 n	1	1	1	1	1	1	1	倍率 n

起重性能表






Rated lifting load table

T 16.1~79.5m

	 16.1-79.5 m T	 3 m V	 30 m F	 9.4×9.6m	 360°	 153 t										
	16.1+3 m		53.1+3 m		58.4+3 m		63.6+3 m		68.9+3 m		74.2+3 m		79.5+3 m			
	20°															
	30 m															
18	9.1													18		
20	8.3													20		
22	7.7													22		
24	7.2													24		
26	6.8		7.9											26		
28	6.3		7.9		7.8									28		
30	5.9		7.6		7.8		7.7							30		
32	5.6		7.4		7.6		7.7		6.9					32		
34	5.4		7.2		7.3		7.5		6.9		5.4			34		
36	5.0		6.9		7.1		7.4		6.9		5.4		4.2	36		
38	4.8		6.7		6.9		7.1		6.5		5.4		4.2	38		
40	4.6		6.5		6.7		6.9		5.9		5.0		4.2	40		
42	4.4		6.3		6.5		6.7		5.5		4.6		3.9	42		
44	4.2		6.1		6.3		6.4		5.1		4.2		3.6	44		
46			5.9		6.1		6.0		4.7		3.9		3.3	46		
48			5.8		6.0		5.5		4.4		3.6		3.0	48		
50			5.6		5.9		5.1		4.1		3.4		2.8	50		
52			5.5		5.7		4.8		3.8		3.1		2.6	52		
54			5.4		5.5		4.4		3.5		2.8		2.4	54		
56			5.2		5.3		4.2		3.2		2.6		2.2	56		
58			5.2		5.0		3.9		3.0		2.4		2.0	58		
60			5.0		4.7		3.7		2.7		2.2			60		
62			4.9		4.5		3.4		2.5		2.0			62		
64			4.7		4.1		3.1		2.3					64		
66			4.5		3.8		2.9		2.1					66		
68			4.4		3.6		2.7							68		
70			4.0		3.4		2.5							70		
72			3.6		3.0		2.3							72		
74			3.3		2.6		2.0							74		
76			2.9		2.3									76		
78			2.5		2.1									78		
80			2.1											80		
组合 Code	000000		211111		221111		222111		222211		222221		222222	组合 Code		
倍率 n	1		1		1		1		1		1		1	倍率 n		




起重性能表
Rated lifting load table

T 16.1~79.5m

	 16.1-79.5 m T	 3 m V	 24 m F	 9.4×9.6m	 360°	 153 t											
	16.1+3 m		53.1+3 m		58.4+3 m		63.6+3 m		68.9+3 m		74.2+3 m		79.5+3 m				
	20°																
	24 m																
14	12.6														14		
16	11.6														16		
18	10.9														18		
20	10.4														20		
22	9.7														22		
24	9.1	11.1													24		
26	8.6	10.9	10.9	10.6											26		
28	8.1	10.7	10.8	10.6	9.4										28		
30	7.6	10.4	10.4	10.2	9.4	6.7									30		
32	7.2	10.0	9.9	9.9	8.7	6.7	5.4								32		
34	7.0	9.6	9.5	9.5	8.1	6.7	5.4								34		
36	6.7	9.2	9.2	9.0	7.5	6.3	5.4								36		
38	6.4	8.8	8.8	8.3	7.0	5.8	5.0								38		
40		8.4	8.6	7.7	6.4	5.4	4.6								40		
42		8.2	8.2	7.3	6.0	5.0	4.2								42		
44		7.8	8.0	6.7	5.5	4.6	3.9								44		
46		7.6	7.7	6.3	5.1	4.3	3.7								46		
48		7.4	7.3	5.8	4.9	4.0	3.5								48		
50		7.2	6.8	5.5	4.5	3.7	3.2								50		
52		6.9	6.4	5.2	4.3	3.5	2.9								52		
54		6.7	6.2	4.9	3.9	3.2	2.7								54		
56		6.5	5.7	4.6	3.6	3.0	2.5								56		
58		6.3	5.3	4.3	3.4	2.8	2.3								58		
60		6.1	5.1	4.0	3.1	2.6	2.1								60		
62		5.9	4.8	3.7	2.9	2.4									62		
64		5.8	4.5	3.4	2.7	2.1									64		
66		5.5	4.2	3.2	2.5										66		
68		5.2	3.8	3.0	2.2										68		
70		4.8	3.4	2.6	2.0										70		
72		4.5	3.1	2.2											72		
74		4.1	2.7	2.0											74		
76			2.3												76		
组合 Code	000000	211111	221111	222111	222211	222221	222222								组合 Code		
倍率 n	1	1	1	1	1	1	1								倍率 n		

起重性能表
Rated lifting load table

T 16.1~79.5m

16.1-79.5 m 3 m 18m 9.4×9.6m 360° 153 t								
 m	16.1+3 m	53.1+3 m	58.4+3 m	63.6+3 m	68.9+3 m	74.2+3 m	79.5+3 m	 m
	20°							
	18 m							
12	16.2							12
14	15.0							14
16	13.8							16
18	12.8							18
20	12.0	15.5						20
22	11.2	14.8	15.1					22
24	10.9	14.4	14.4	13.8	11.9			24
26	10.6	13.8	13.7	13.5	11.9	8.8		26
28	10.2	13.3	13.2	12.8	11.1	8.8	6.8	28
30	9.7	12.7	12.7	11.9	10.1	8.8	6.8	30
32	9.3	12.1	12.2	11.1	9.3	8.1	6.8	32
34		11.7	11.7	10.3	8.7	7.5	6.4	34
36		11.3	11.4	9.6	8.1	7.0	5.9	36
38		10.7	10.9	9.0	7.5	6.5	5.5	38
40		10.3	10.1	8.3	7.0	6.1	5.1	40
42		10.0	9.7	7.9	6.5	5.7	4.8	42
44		9.7	9.0	7.3	6.0	5.3	4.6	44
46		9.4	8.4	6.8	5.6	4.9	4.2	46
48		9.0	8.0	6.4	5.3	4.6	4.0	48
50		8.8	7.6	6.0	5.0	4.3	3.7	50
52		8.5	7.2	5.6	4.7	4.0	3.5	52
54		8.3	6.7	5.3	4.4	3.7	3.3	54
56		8.0	6.3	4.9	4.1	3.5	2.9	56
58		7.7	6.0	4.7	3.8	3.3	2.7	58
60		7.3	5.6	4.5	3.5	3.1	2.5	60
62		6.7	5.4	4.1	3.2	2.9	2.3	62
64		6.1	4.7	3.9	3.0	2.6	2.2	64
66		5.6	4.2	3.4	2.8	2.4	2.0	66
68		5.2	3.8	3.0	2.5	2.2		68
70			3.4	2.7	2.1	2.1		70
72			3.0	2.3				72
74								74
组合 Code	000000	211111	221111	222111	222211	222221	222222	组合 Code
倍率 n	2	2	2	2	1	1	1	倍率 n

起重性能表
Rated lifting load table

T 16.1~79.5m

16.1-79.5 m T 3 m V 12m F 9.4×9.6m 360° 153 t								
m	16.1+3 m	53.1+3 m	58.4+3 m	63.6+3 m	68.9+3 m	74.2+3 m	79.5+3 m	m
	20°							
	12 m							
8	29.4							8
9	27.8							9
10	26.4							10
12	23.9							12
14	22.1							14
16	21.1	22.8						16
18	19.7	21.6	21.1					18
20	18.7	20.5	20.2					20
22	17.6	19.3	19.3	18.0	14.0			22
24	17.0	18.4	18.5	16.4	14.0	11.1		24
26	16.2	17.7	17.8	15.2	12.8	11.1	9.0	26
28		16.9	16.3	13.9	11.8	10.2	9.0	28
30		16.1	15.3	12.9	10.9	9.4	8.3	30
32		15.4	14.3	12.1	10.1	8.8	7.8	32
34		14.9	13.2	11.3	9.3	8.2	7.1	34
36		14.4	12.4	10.5	8.6	7.6	6.7	36
38		13.8	11.5	9.7	8.2	7.0	6.3	38
40		13.3	11.0	9.1	7.6	6.6	5.9	40
42		12.6	10.3	8.7	7.2	6.2	5.5	42
44		12.0	9.7	8.1	6.6	5.8	5.1	44
46		11.5	9.1	7.6	6.1	5.4	4.8	46
48		10.7	8.7	7.0	5.7	5.1	4.5	48
50		10.3	8.3	6.6	5.5	4.8	4.2	50
52		9.9	7.6	6.2	5.1	4.4	4.0	52
54		9.4	7.2	5.8	4.8	4.2	3.8	54
56		9.0	6.8	5.5	4.4	3.8	3.6	56
58		8.2	6.5	5.2	4.2	3.6	3.4	58
60		7.4	5.8	4.8	4.0	3.4	3.2	60
62		6.7	5.1	4.6	3.8	3.2	2.9	62
64			4.5	4.0	3.6	3.0	2.7	64
66			4.0	3.4	3.1	2.7	2.5	66
68				2.9	2.6	2.4	2.4	68
70				2.4	2.1	2.0	2.0	70
组合 Code	000000	211111	221111	222111	222211	222221	222222	组合 Code
倍率 n	3	2	2	2	2	1	1	倍率 n

起重性能表

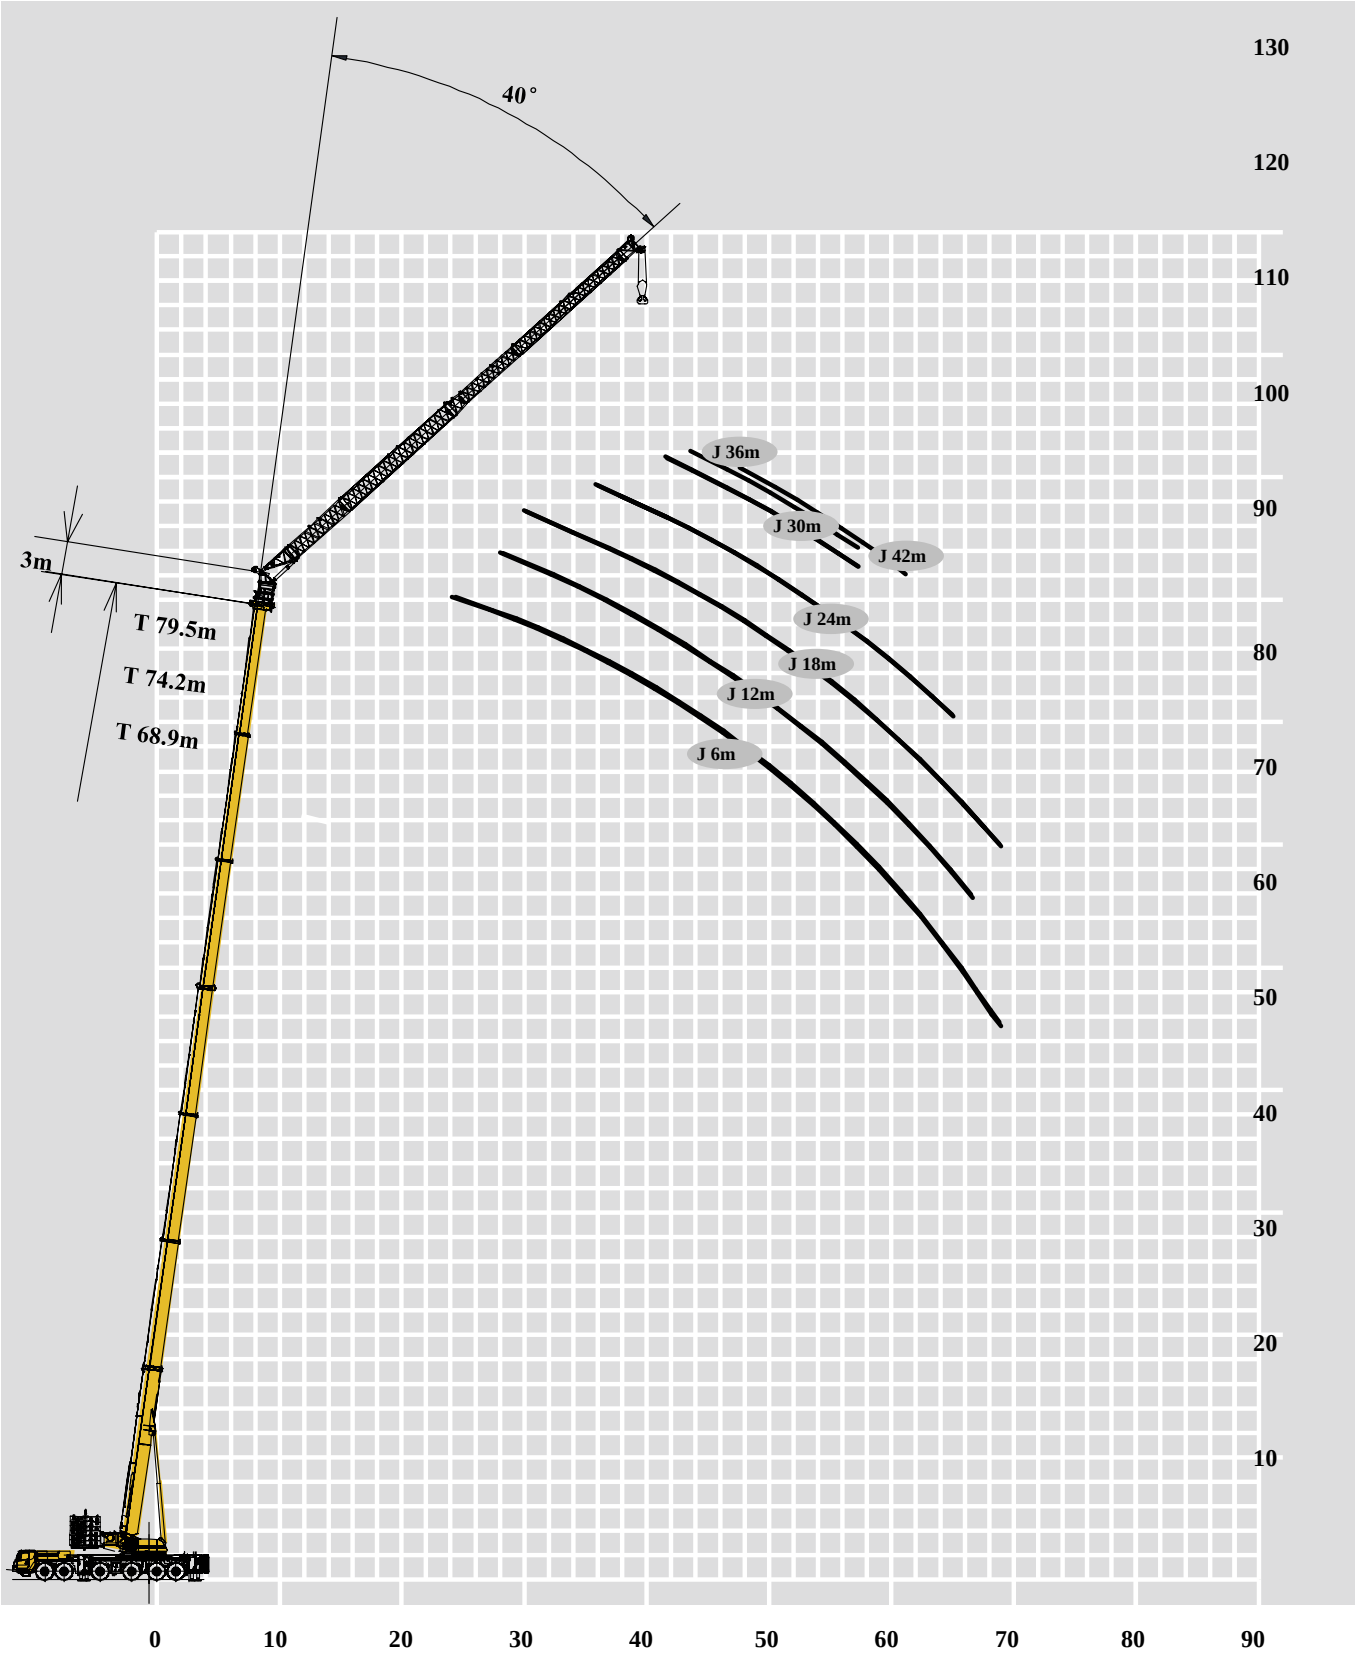
Rated lifting load table

T 16.1~79.5m

16.1-79.5 m T 3 m V 6m F 9.4×9.6m 360° 153 t								
	16.1+3 m	53.1+3 m	58.4+3 m	63.6+3 m	68.9+3 m	74.2+3 m	79.5+3 m	
	20°							
	6 m							
5	41.4							5
6	39.0							6
7	36.6							7
8	34.8							8
9	33.2							9
10	31.6							10
12	28.7							12
14	26.6	32.2						14
16	24.9	30.8	30.4					16
18	23.3	29.3	28.3					18
20	22.4	28.6	25.7	21.7	18.7			20
22		27.2	23.2	19.7	17.2	14.9		22
24		25.5	21.4	17.8	15.6	13.7	11.9	24
26		23.8	19.8	16.4	14.4	12.6	10.9	26
28		21.9	18.2	15.2	13.2	11.6	10.0	28
30		20.5	16.9	14.1	12.2	10.6	9.2	30
32		19.0	15.6	13.2	11.4	9.9	8.7	32
34		17.9	14.8	12.3	10.4	9.2	8.1	34
36		16.9	13.6	11.4	9.6	8.6	7.5	36
38		15.8	12.7	10.5	9.2	8.1	7.1	38
40		14.9	11.9	9.9	8.4	7.5	6.7	40
42		14.1	11.5	9.3	8.0	7.0	6.3	42
44		13.2	10.7	8.7	7.5	6.6	5.9	44
46		12.5	10.2	8.3	6.9	6.2	5.5	46
48		11.6	9.2	7.9	6.5	5.7	5.3	48
50		10.9	8.5	7.5	6.1	5.5	4.9	50
52		10.4	7.9	6.8	5.7	5.1	4.7	52
54		9.7	7.3	6.2	5.4	4.9	4.5	54
56		8.7	6.7	5.5	5.1	4.6	4.1	56
58			5.9	5.0	4.8	4.2	3.9	58
60			5.1	4.6	4.5	4.0	3.7	60
62				4.0	3.9	3.8	3.5	62
64				3.5	3.3	3.3	3.3	64
66				3.0	2.8	2.8	2.8	66
68					2.4	2.4	2.4	68
70					2.0	2.0	2.0	70
组合 Code	000000	211111	221111	222111	222211	222221	222222	组合 Code
倍率 n	4	3	3	2	2	2	1	倍率 n

起升高度曲线图
Lifting height chart

主臂+副臂
Boom + Jib



起重性能表

Rated lifting load table




T 16.1~68.9 m

16.1-68.9 m T 3 m V 42 m F 9.4×9.6 m 360° 153 t						
		16.1+3 m	53.1+3 m	58.4+3 m	63.6+3 m	68.9+3 m
		40°				
		42 m				
34	3.0					34
36	2.9					36
38	2.8					38
40	2.7					40
42	2.5					42
44	2.4	2.8				44
46	2.3	2.8	2.8			46
48	2.1	2.7	2.7	2.8		48
50	2.1	2.6	2.6	2.7	2.7	50
52	2.0	2.6	2.6	2.6	2.7	52
54	2.0	2.5	2.5	2.6	2.7	54
56		2.4	2.5	2.5	2.6	56
58		2.3	2.4	2.5	2.6	58
60		2.3	2.4	2.5	2.4	60
62		2.3	2.3	2.4	2.2	62
64		2.2	2.3	2.4	2.0	64
66		2.2	2.3	2.4		66
68		2.2	2.3	2.4		68
70		2.2	2.2	2.2		70
72		2.1	2.2	2.1		72
74		2.1	2.2			74
76		2.1	2.2			76
78		2.1	2.0			78
80		2.0				80
82		2.0				82
84						84
86						86
组合 Code	000000	211111	221111	222111	222211	组合 Code
倍率 n	1	1	1	1	1	倍率 n

起重性能表

Rated lifting load table




T 16.1~74.2 m

16.1-74.2 m 3 m 36 m 9.4×9.6 m 360° 153 t							
 m	16.1+3 m	53.1+3 m	58.4+3 m	63.6+3 m	68.9+3 m	74.2+3 m	 m
	40°						
	36 m						
30	4.3						30
32	4.1						32
34	3.9						34
36	3.7						36
38	3.6	4.1					38
40	3.4	4.0	4.1				40
42	3.3	3.9	4.0	4.0			42
44	3.1	3.8	3.9	4.0			44
46	3.1	3.7	3.8	3.9	4.0	3.3	46
48		3.6	3.7	3.8	3.9	3.3	48
50		3.6	3.7	3.8	3.8	3.1	50
52		3.5	3.6	3.7	3.6	2.9	52
54		3.5	3.6	3.7	3.4	2.7	54
56		3.4	3.5	3.6	3.2	2.5	56
58		3.4	3.5	3.6	3.0	2.3	58
60		3.3	3.4	3.6	2.8	2.2	60
62		3.3	3.4	3.4	2.6		62
64		3.3	3.4	3.1	2.4		64
66		3.2	3.4	2.9	2.1		66
68		3.2	3.3	2.7	2.0		68
70		3.2	3.3	2.5			70
72		3.2	3.2	2.3			72
74		3.1	2.9	2.2			74
76		3.1	2.6				76
78			2.2				78
80			2.0				80
组合 Code	000000	211111	221111	222111	222211	222221	组合 Code
倍率 n	1	1	1	1	1	1	倍率 n

起重性能表

Rated lifting load table




T 16.1~79.5 m

16.1-79.5 m 3 m 30 m 9.4×9.6 m 360° 153 t								
m 16.1+3 m 53.1+3 m 58.4+3 m 63.6+3 m 68.9+3 m 74.2+3 m 79.5+3 m 40° 30 m m								
26	5.5							26
28	5.2							28
30	5.0							30
32	4.8							32
34	4.6	5.3						34
36	4.4	5.2	5.2					36
38	4.3	5.2	5.2	5.3				38
40	4.2	5.0	5.1	5.2	5.2			40
42	4.2	5.0	5.0	5.1	5.2	4.3		42
44		4.8	4.9	5.1	5.2	4.3	3.4	44
46		4.8	4.9	5.0	4.9	4.1	3.4	46
48		4.7	4.8	4.9	4.7	3.9	3.2	48
50		4.7	4.7	4.9	4.4	3.6	3.0	50
52		4.6	4.7	4.9	4.2	3.3	2.8	52
54		4.5	4.7	4.8	3.9	3.1	2.6	54
56		4.5	4.6	4.5	3.6	2.9	2.4	56
58		4.5	4.6	4.3	3.4	2.8	2.3	58
60		4.4	4.6	4.1	3.2	2.6	2.1	60
62		4.4	4.6	3.9	3.0	2.4		62
64		4.4	4.6	3.7	2.8	2.2		64
66		4.4	4.4	3.5	2.6	2.1		66
68		4.4	4.1	3.2	2.4	2.0		68
70		4.3	3.7	2.9	2.3			70
72			3.4	2.5	2.1			72
74			3.0	2.3				74
76				2.0				76
组合 Code	000000	211111	221111	222111	222211	222221	222222	组合 Code
倍率 n	1	1	1	1	1	1	1	倍率 n

起重性能表

Rated lifting load table




T 16.1~79.5 m

16.1-79.5 m 3 m 24 m 9.4×9.6 m 360° 153 t								
 m	16.1+3 m	53.1+3 m	58.4+3 m	63.6+3 m	68.9+3 m	74.2+3 m	79.5+3 m	 m
	40°							
	24 m							
20	8.4							20
22	8.0							22
24	7.5							24
26	7.2							26
28	6.9							28
30	6.6	7.8						30
32	6.4	7.6	7.7	7.8				32
34	6.2	7.4	7.6	7.6	7.4			34
36	6.2	7.4	7.5	7.6	7.4	5.8		36
38		7.2	7.4	7.6	7.0	5.8	4.6	38
40		7.1	7.3	7.5	6.6	5.4	4.6	40
42		7.0	7.2	7.4	6.1	5.1	4.4	42
44		7.0	7.1	7.2	5.7	4.8	4.2	44
46		6.8	7.0	6.7	5.4	4.5	3.9	46
48		6.8	6.8	6.3	5.1	4.3	3.7	48
50		6.5	6.7	6.0	4.8	4.1	3.5	50
52		6.5	6.5	5.7	4.6	3.9	3.3	52
54		6.3	6.4	5.4	4.3	3.6	3.1	54
56		6.1	6.3	5.0	4.1	3.4	2.9	56
58		6.1	5.9	4.8	3.9	3.2	2.8	58
60		5.9	5.6	4.6	3.7	3.0	2.6	60
62		5.9	5.4	4.4	3.5	2.9	2.4	62
64		5.8	4.9	4.0	3.3	2.7	2.3	64
66			4.5	3.6	3.0	2.7	2.2	66
68			4.0	3.3	2.6	2.5	2.0	68
70				3.0	2.4	2.1		70
72				2.7	2.0			72
74								74
组合 Code	000000	211111	221111	222111	222211	222221	222222	组合 Code
倍率 n	1	1	1	1	1	1	1	倍率 n

起重性能表

Rated lifting load table

T 16.1~79.5 m

16.1-79.5 m 3 m 18 m 9.4×9.6 m 360° 153 t								
 m	16.1+3 m	53.1+3 m	58.4+3 m	63.6+3 m	68.9+3 m	74.2+3 m	79.5+3 m	 m
	40°							
	18 m							
16	10.8							16
18	10.8							18
20	10.4							20
22	10.0							22
24	9.6	10.8						24
26	9.2	10.8	10.7					26
28	9.0	10.7	10.7	10.8	10.0			28
30	9.0	10.6	10.7	10.8	10.0	7.4		30
32		10.5	10.7	10.7	9.4	7.4	6.0	32
34		10.3	10.5	10.4	8.8	7.4	6.0	34
36		10.2	10.1	9.8	8.3	6.9	6.0	36
38		9.8	9.9	9.2	7.8	6.5	5.7	38
40		9.6	9.7	8.8	7.3	6.1	5.4	40
42		9.4	9.4	8.1	6.9	5.8	5.1	42
44		9.0	9.2	7.7	6.5	5.4	4.8	44
46		8.8	9.0	7.3	6.2	5.2	4.6	46
48		8.6	8.6	6.9	5.9	5.1	4.3	48
50		8.6	8.2	6.7	5.6	4.6	4.1	50
52		8.4	7.7	6.3	5.2	4.4	3.9	52
54		8.1	7.3	6.0	5.0	4.2	3.7	54
56		8.0	7.1	5.7	4.7	4.0	3.5	56
58		7.9	6.4	5.5	4.5	3.8	3.4	58
60			5.8	4.9	4.3	3.6	3.2	60
62			5.3	4.4	3.9	3.5	3.0	62
64				4.0	3.5	3.3	2.9	64
66				3.6	3.2	3.0	2.8	66
68					2.8	2.7	2.5	68
70					2.5	2.4	2.3	70
72						2.2	2.0	72
组合 Code	000000	211111	221111	222111	222211	222221	222222	组合 Code
倍率 n	1	1	1	1	1	1	1	倍率 n

起重性能表

Rated lifting load table

T 16.1~79.5 m

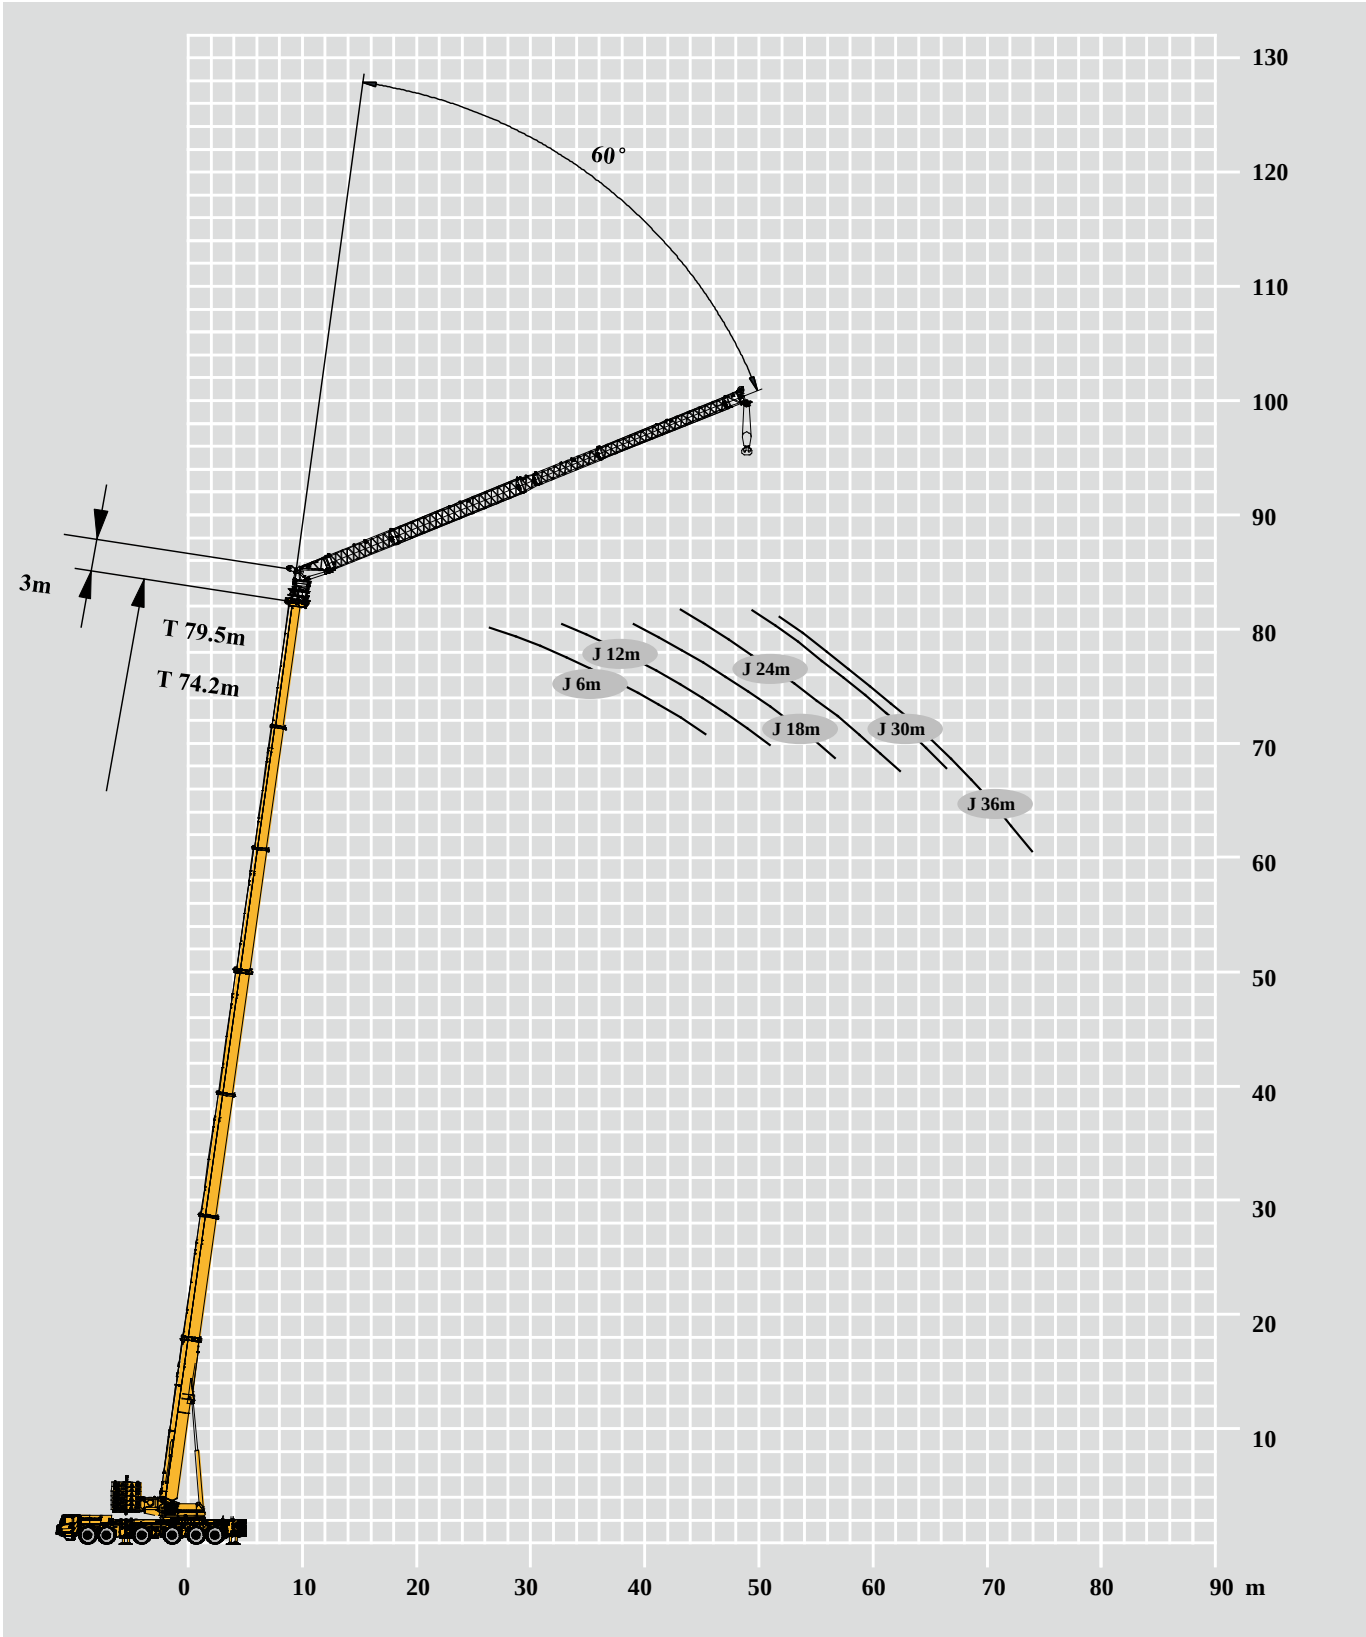
16.1-79.5 m T 3 m V 12m F 9.4×9.6 m 360° 153 t								
m 16.1+3 m 53.1+3 m 58.4+3 m 63.6+3 m 68.9+3 m 74.2+3 m 79.5+3 m 40° 12 m m								
10	18.8							10
12	18.8							12
14	18.0							14
16	17.2							16
18	16.4	18.7						18
20	15.9	17.9						20
22	15.5	17.1	16.7					22
24	15.3	16.4	16.4	15.9				24
26		16.0	15.9	14.8	12.8			26
28		15.2	15.2	14.0	11.9	10.3		28
30		14.8	14.8	13.0	11.1	9.6	7.4	30
32		14.4	14.4	12.2	10.3	9.0	7.2	32
34		14.0	13.7	11.4	9.7	8.4	7.0	34
36		13.6	12.9	10.7	9.1	8.1	6.8	36
38		13.2	12.0	10.0	8.7	7.6	6.5	38
40		12.8	11.5	9.6	8.1	7.1	6.1	40
42		12.4	10.9	9.0	7.7	6.7	5.9	42
44		12.2	10.5	8.6	7.2	6.5	5.5	44
46		11.9	9.9	8.2	6.8	6.1	5.3	46
48		11.6	9.4	7.8	6.6	5.9	5.1	48
50		11.0	9.0	7.4	6.2	5.5	4.9	50
52		10.3	8.6	6.9	6.0	5.3	4.7	52
54			7.8	6.6	5.6	5.1	4.5	54
56			7.1	6.0	5.4	4.8	4.3	56
58				5.4	4.9	4.6	4.0	58
60				5.0	4.4	4.3	3.8	60
62					4.0	3.9	3.5	62
64					3.6	3.5	3.1	64
66						3.2	2.9	66
68						2.8	2.6	68
70							2.2	70
组合 Code	000000	211111	221111	222111	222211	222221	222222	组合 Code
倍率 n	2	2	2	2	1	1	1	倍率 n

起重性能表

Rated lifting load table

T 16.1~79.5 m

16.1-79.5 m T 3 m V 6 m F 9.4×9.6 m 360° 153 t								
m 16.1+3 m 53.1+3 m 58.4+3 m 63.6+3 m 68.9+3 m 74.2+3 m 79.5+3 m 40° 6 m m								
6	27.4							6
7	27.4							7
8	26.6							8
9	25.8							9
10	25.0							10
12	23.7							12
14	22.9	24.0						14
16	22.1	23.7	23.5					16
18	22.1	23.1	23.1					18
20		22.5	22.5	21.2	18.3			20
22		22.2	22.0	19.5	16.8	14.8		22
24		21.8	21.8	18.2	15.7	13.6		24
26		21.6	20.3	17.0	14.5	12.7	10.9	26
28		21.3	18.6	15.8	13.6	12.0	10.1	28
30		21.1	17.4	14.5	12.8	11.2	9.5	30
32		19.8	16.5	13.6	11.8	10.4	8.9	32
34		18.6	15.3	12.8	11.0	9.6	8.4	34
36		17.5	14.5	12.1	10.4	9.1	8.0	36
38		16.7	13.5	11.3	9.8	8.7	7.6	38
40		15.8	12.6	10.8	9.2	8.2	7.2	40
42		15.0	12.0	10.2	8.8	7.7	6.8	42
44		14.1	11.1	9.6	8.4	7.3	6.4	44
46		13.0	10.6	9.1	8.0	6.9	6.3	46
48			9.8	8.5	7.6	6.6	6.1	48
50			8.9	8.0	7.2	6.2	5.6	50
52				7.2	6.5	6.0	5.4	52
54				6.6	5.9	5.5	5.2	54
56					5.4	5.0	5.0	56
58					4.9	4.6	4.6	58
60						4.2	4.2	60
62						3.8	3.8	62
64							3.2	64
66							2.7	66
68								68
70								70
组合 Code	000000	211111	221111	222111	222211	222221	222222	组合 Code
倍率 n	3	2	2	2	2	2	1	倍率 n



起重性能表

Rated lifting load table

T 16.1~74.2 m

 m 16.1-74.2 m T 3 m V 36 m F 9.4×9.6 m 360° 153 t  m											
16.1+3 m		53.1+3 m		58.4+3 m		63.6+3 m		68.9+3 m		74.2+3 m	
60°											
36 m											
36	3.5									36	
38	3.4									38	
40	3.3									40	
42	3.3									42	
44	3.3	3.5								44	
46	3.3	3.4	3.4							46	
48		3.4	3.4	3.5						48	
50		3.4	3.4	3.5	3.5					50	
52		3.4	3.4	3.5	3.5	2.8				52	
54		3.4	3.4	3.5	3.5	2.7				54	
56		3.4	3.4	3.5	3.5	2.7				56	
58		3.3	3.4	3.4	3.5	2.6				58	
60		3.3	3.3	3.4	3.4	2.6				60	
62			3.3	3.4	3.3	2.6				62	
64			3.3	3.4	3.3	2.5				64	
66				3.3	3.1	2.5				66	
68					3.0	2.5				68	
70						2.5				70	
72										72	
74										74	
组合 Code	000000	211111	221111	222111	222211	222221				组合 Code	
倍率 n	1	1	1	1	1	1				倍率 n	

起重性能表

Rated lifting load table

T 16.1~79.5 m

16.1-79.5 m T 3 m V 30 m F 9.4×9.6 m 360° 153 t								m			
53.1+3 m		58.4+3 m		63.6+3 m		68.9+3 m		74.2+3 m		79.5+3 m	
60°											
30 m											
30								30			
32								32			
34								34			
36								36			
38	4.6							38			
40	4.6	4.6						40			
42	4.6	4.6	4.7					42			
44	4.6	4.6	4.7	4.8				44			
46	4.6	4.6	4.7	4.8				46			
48	4.6	4.6	4.7	4.8	4.0			48			
50	4.6	4.6	4.7	4.8	3.8	3.1		50			
52	4.6	4.6	4.7	4.8	3.8	3.1		52			
54	4.6	4.5	4.6	4.7	3.7	3.0		54			
56		4.5	4.6	4.5	3.7	3.0		56			
58		4.5	4.6	4.4	3.6	3.0		58			
60			4.5	4.3	3.6	2.9		60			
62				4.0	3.5	2.8		62			
64					3.5	2.7		64			
66					3.5	2.6		66			
68								68			
70								70			
72								72			
组合 Code	211111	221111	222111	222211	222221	222222		组合 Code			
倍率 n	1	1	1	1	1	1		倍率 n			

起重性能表

Rated lifting load table

T 16.1~79.5 m

m 16.1-79.5 m T 3 m V 24 m F 9.4×9.6 m 360° 153 t m							
		53.1+3 m	58.4+3 m	63.6+3 m	68.9+3 m	74.2+3 m	79.5+3 m
		60°					
		24 m					
26							26
28							28
30							30
32	7.0						32
34	7.0	7.0					34
36	7.0	7.0	7.2				36
38	7.0	7.0	7.2	6.9			38
40	7.0	7.0	7.2	6.7			40
42	7.0	7.0	7.1	6.5	5.4		42
44	7.0	7.0	6.9	6.4	5.2	4.4	44
46	6.8	6.8	6.9	6.2	5.1	4.3	46
48	6.7	6.7	6.7	6.2	5.1	4.2	48
50		6.7	6.7	5.9	4.9	4.1	50
52		6.5	6.5	5.8	4.9	4.1	52
54			6.5	5.7	4.7	4.0	54
56				5.4	4.7	3.9	56
58					4.7	3.7	58
60					4.5	3.6	60
62						3.5	62
64							64
66							66
组合 Code	211111	221111	222111	222211	222221	222222	组合 Code
倍率 n	1	1	1	1	1	1	倍率 n

起重性能表

Rated lifting load table

T 16.1~79.5 m

16.1-79.5 m T 3 m V 18 m F 9.4×9.6 m 360° 153 t								m				
53.1+3 m		58.4+3 m		63.6+3 m		68.9+3 m		74.2+3 m		79.5+3 m		
60°												
18 m												
20											20	
22											22	
24											24	
26											26	
28	10.2		10.4								28	
30	10.2		10.4		10.3						30	
32	10.2		10.2		10.1						32	
34	10.1		10.0		9.9		9.0				34	
36	9.8		9.8		9.7		8.7		7.4		36	
38	9.7		9.6		9.6		8.4		7.2		38	
40	9.5		9.4		9.4		8.3		7.0		40	
42	9.3		9.2		9.0		8.1		6.8		42	
44			9.2		8.9		7.9		6.6		44	
46			9.0		8.6		7.7		6.4		46	
48					8.3		7.4		6.3		48	
50							7.1		6.2		50	
52									6.1		52	
54									6.0		54	
56									4.9		56	
58											58	
60											60	
组合 Code	211111		221111		222111		222211		222221		222222	组合 Code
倍率 n	1		1		1		1		1		1	倍率 n

起重性能表

Rated lifting load table

T 16.1~79.5 m

16.1-79.5 m T 3 m V 12 m F 9.4×9.6 m 360° 153 t							
m 53.1+3 m 58.4+3 m 63.6+3 m 68.9+3 m 74.2+3 m 79.5+3 m 60° 12 m m							
12							12
14							14
16							16
18							18
20	15.6						20
22	15.5	15.1					22
24	15.4	15.1					24
26	15.2	15.1	14.9				26
28	14.8	14.8	14.5	12.4			28
30	14.4	14.4	13.9	11.8	9.1		30
32	14.1	14.0	13.4	11.5	9.0	5.9	32
34	13.8	13.8	13.0	11.1	8.8	5.8	34
36	13.5	13.6	12.6	10.7	8.6	5.7	36
38		13.2	12.0	10.3	8.4	5.6	38
40		13.1	11.4	10.0	8.3	5.4	40
42			10.9	9.6	8.1	5.3	42
44				9.3	7.8	5.2	44
46					7.6	5.1	46
48					7.4	5.1	48
50						5.0	50
52							52
54							54
组合 Code	211111	221111	222111	222211	222221	222222	组合 Code
倍率 n	2	2	2	1	1	1	倍率 n

起重性能表

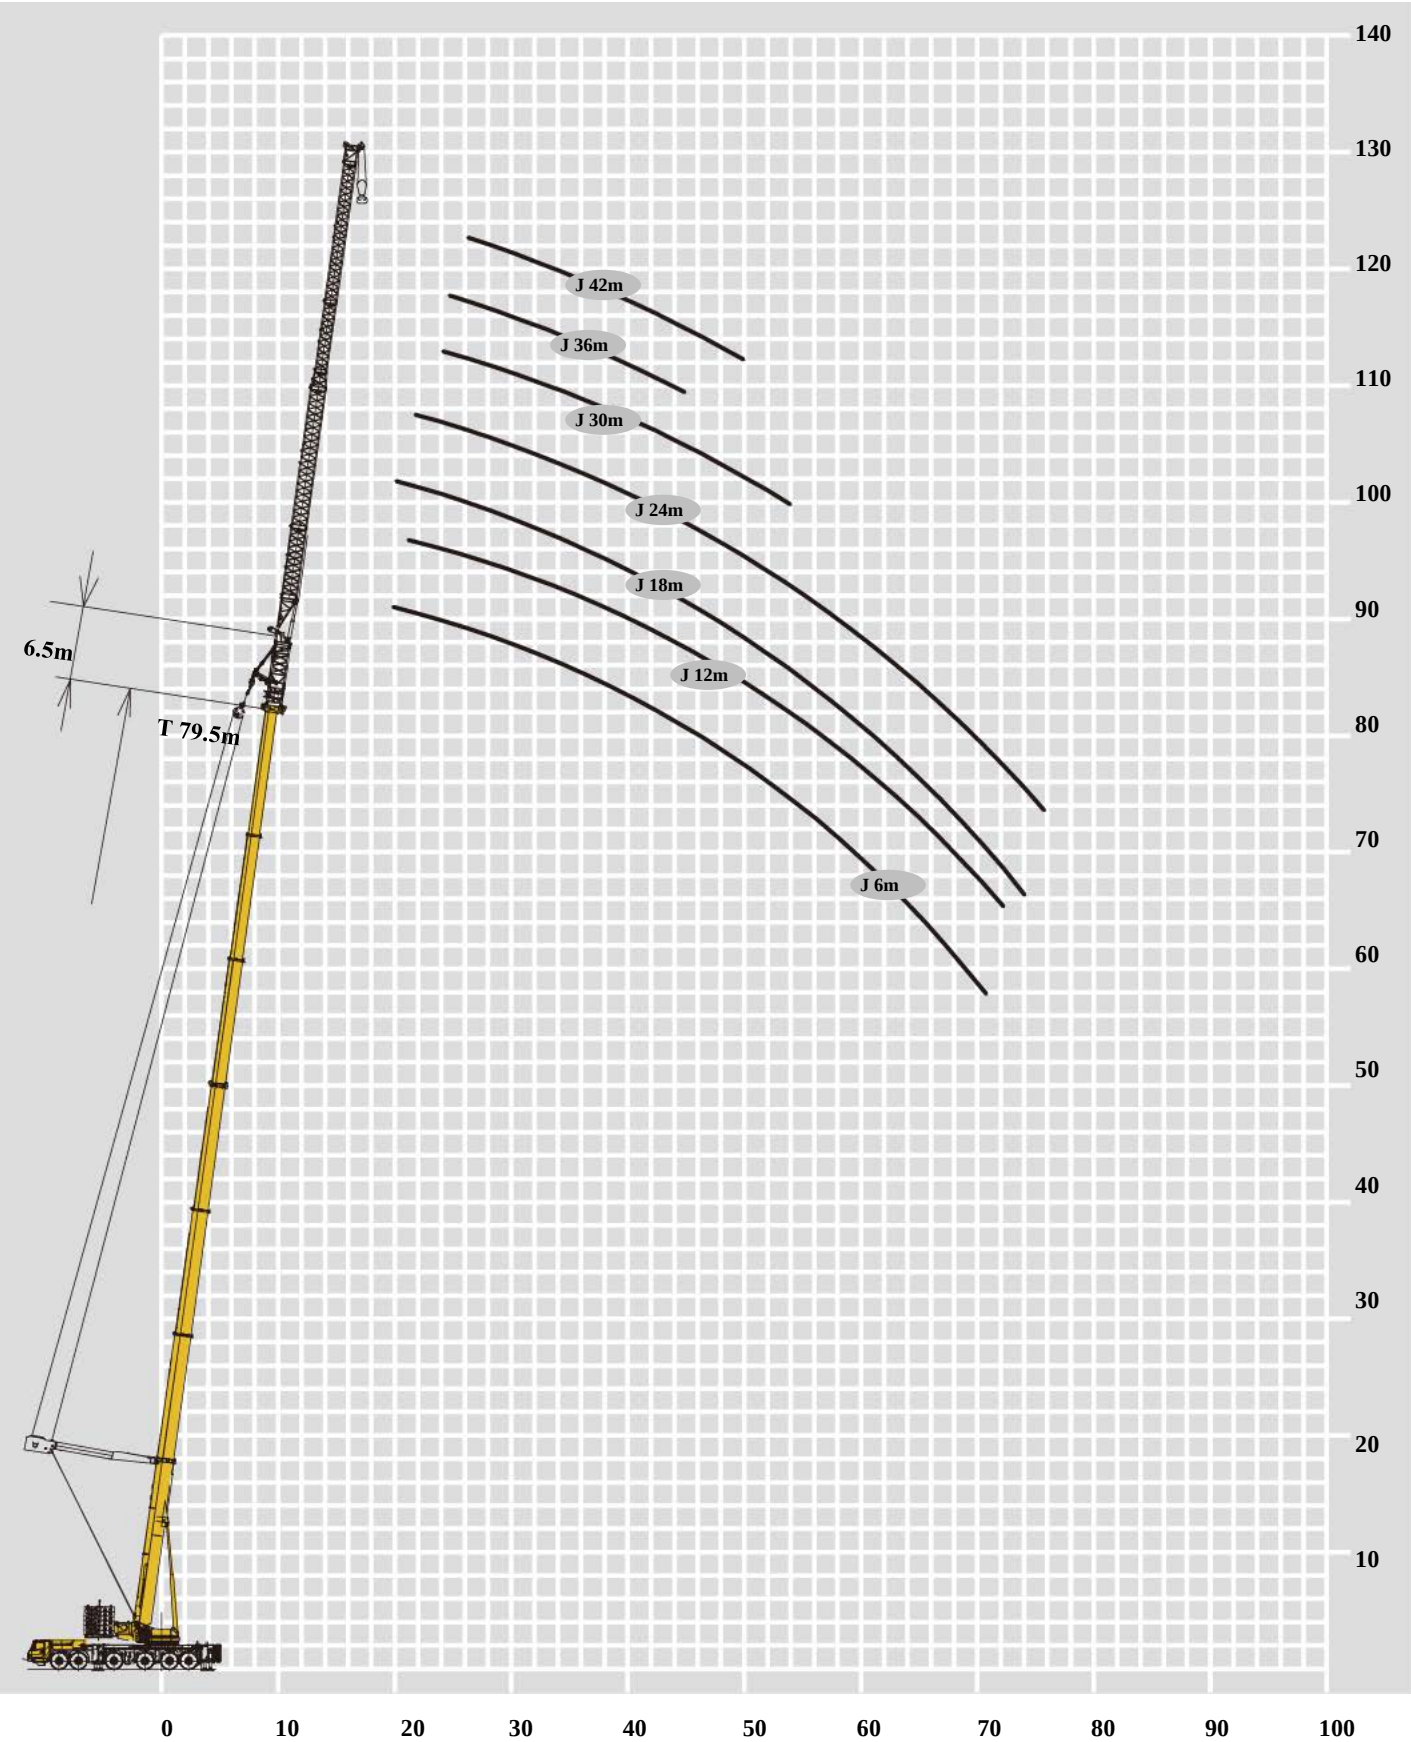
Rated lifting load table

T 16.1~79.5 m

16.1-79.5 m T 3 m V 6 m F 9.4×9.6 m 360° 153 t								m			
53.1+3 m		58.4+3 m		63.6+3 m		68.9+3 m		74.2+3 m		79.5+3 m	
60°											
6 m											
7										7	
8										8	
9										9	
10										10	
12										12	
14	20.8									14	
16	20.8	20.5								16	
18	20.8	20.5								18	
20	20.5	20.5	20.3							20	
22	20.4	20.5	20.1	17.0						22	
24	20.4	20.1	19.7	16.0	14.1					24	
26	20.4	20.1	18.7	15.3	13.4	11.8				26	
28	20.4	19.8	17.8	14.6	12.8	11.3				28	
30	20.3	19.6	17.0	14.2	12.4	10.9				30	
32		18.8	16.1	13.4	12.0	10.4				32	
34		17.9	15.3	12.9	11.6	10.0				34	
36			14.4	12.4	11.2	9.7				36	
38				11.9	10.7	9.4				38	
40					10.3	9.3				40	
42					9.9	9.1				42	
44						8.6				44	
46										46	
48										48	
组合 Code	211111	221111	222111	222211	222221	222222				组合 Code	
倍率 n	2	2	2	2	2	1				倍率 n	

起升高度曲线图
Lifting height chart

主臂+超起+副臂
Boom+ Super lifting device + Jib



起重性能表
Rated lifting load table

T 53.1~79.5 m

53.1-79.5 m 6.5 m 42 m 9.4×9.6 m 360° 153 t SL 53.1 53.1 53.1 58.4 58.4 58.4 63.6 63.6 63.6 68.9 68.9 74.2 74.2 79.5 6.5 m 0° 42 m															
18	13.4	13.3	13.2	13.0	13.5	13.6									18
20	12.5	12.6	12.6	12.5	12.7	12.8									20
22	11.7	11.7	11.7	11.9	11.9	12.1	11.7	12.0	12.0	11.1	11.3				22
24	11.0	11.0	11.0	11.2	11.1	11.2	11.2	11.4	11.3	10.7	11.0	9.7	10.2		24
26	10.4	10.5	10.5	10.7	10.7	10.7	10.7	10.8	10.8	10.3	10.6	9.4	9.9	4.4	26
28	9.8	9.7	9.9	10.0	10.1	10.1	10.2	10.3	10.2	10.0	10.2	9.1	9.7	4.3	28
30	9.2	9.2	9.1	9.4	9.5	9.4	9.6	9.8	9.7	9.6	9.8	8.5	9.1	4.2	30
32	8.6	8.6	8.6	8.8	8.9	9.0	9.1	9.2	9.3	9.2	9.2	7.9	8.4	4.1	32
34	8.0	8.1	8.1	8.4	8.4	8.4	8.7	8.7	8.7	8.6	8.8	7.3	7.7	4.0	34
36	7.6	7.6	7.7	8.0	8.0	8.0	8.2	8.3	8.3	8.2	8.4	6.7	7.0	3.9	36
38	7.2	7.2	7.3	7.6	7.6	7.6	7.8	7.8	7.9	7.9	8.0	6.0	6.3	3.8	38
40	6.8	6.8	6.9	7.2	7.2	7.2	7.4	7.4	7.5	7.6	7.6	5.2	5.4	3.7	40
42	6.5	6.5	6.5	6.8	6.8	6.8	7.0	7.1	7.1	7.2	7.3	4.5	4.7	3.4	42
44	6.2	6.2	6.2	6.4	6.5	6.5	6.7	6.7	6.8	6.9	6.9	3.9	4.0	3.1	44
46	5.9	5.9	5.9	6.1	6.2	6.2	6.4	6.5	6.5	6.6	6.7	3.4	3.4	2.8	46
48	5.7	5.6	5.6	5.9	5.9	5.9	6.1	6.2	6.2	6.4	6.4	2.7	2.8	2.5	48
50	5.4	5.4	5.4	5.6	5.7	5.7	5.9	6.0	6.0	6.1	6.2	2.1	2.2	2.2	50
52	5.1	5.1	5.1	5.4	5.5	5.4	5.7	5.7	5.7	5.9	5.9				52
54	4.9	4.9	4.9	5.2	5.2	5.2	5.4	5.5	5.5	5.7	5.6				54
56	4.7	4.7	4.7	5.0	4.9	5.0	5.2	5.2	5.3	5.5	5.4				56
58	4.5	4.5	4.5	4.8	4.7	4.8	5.0	5.0	5.1	5.3	5.2				58
60	4.3	4.3	4.3	4.6	4.5	4.6	4.8	4.8	4.8	5.1	5.0				60
62	4.2	4.1	4.2	4.4	4.4	4.4	4.6	4.6	4.6	4.8	4.8				62
64	3.9	4.0	4.0	4.2	4.2	4.2	4.5	4.4	4.4	4.7	4.7				64
66	3.8	3.8	3.8	4.0	4.1	4.0	4.3	4.3	4.3	4.5	4.5				66
68	3.7	3.7	3.7	3.9	3.9	3.9	4.2	4.1	4.1	4.4	4.4				68
70	3.5	3.5	3.5	3.7	3.8	3.8	4.0	4.0	4.0	4.3	4.2				70
72	3.4	3.4	3.4	3.6	3.6	3.6	3.9	3.9	3.8	4.1	4.0				72
74	3.3	3.3	3.3	3.5	3.5	3.2	3.7	3.5	3.3	3.9	3.4				74
76	3.2	3.2	2.8	3.4	3.3	2.7	3.4	3.0	2.8	3.6	2.9				76
78	3.1	3.0	2.3	3.2	2.8	2.2	2.9	2.5	2.3	3.1	2.4				78
80	3.0	2.8		2.7	2.3		2.5	2.0		2.6					80
82	2.6	2.4		2.3			2.0			2.1					82
84	2.2														84
组合 Code	121111	211111	222100	122111	221111	222200	122220	222111	222210	122221	222211	122222	222221	222222	组合 Code
倍率 n	1	1	1	1	1	1	1	1	1	1	1	1	1	1	倍率 n





起重性能表
Rated lifting load table

T 53.1~79.5 m

				   											
	53.1	53.1	53.1	58.4	58.4	58.4	63.6	63.6	63.6	68.9	68.9	74.2	74.2	79.5	
	6.5m														
	0°														
	36 m														
18	15.8	15.8	16.0	15.6	15.8	15.9									18
20	14.9	14.9	15.0	14.9	15.0	15.2	14.7	15.0	14.9	14.3	15.0				20
22	14.1	14.0	14.2	14.1	14.3	14.4	14.2	14.3	14.4	13.8	14.2	10.0	10.2		22
24	13.1	13.1	13.2	13.5	13.5	13.7	13.7	13.6	13.8	13.2	13.5	9.8	10.0	5.2	24
26	12.3	12.3	12.4	12.7	12.7	12.7	12.9	13.0	13.0	12.7	12.8	9.6	9.8	5.2	26
28	11.5	11.5	11.6	11.9	11.9	11.9	12.2	12.2	12.3	12.1	12.3	9.3	9.6	5.2	28
30	11.0	11.0	11.0	11.2	11.3	11.2	11.6	11.6	11.6	11.5	11.7	9.1	9.4	5.2	30
32	10.5	10.6	10.6	10.7	10.8	10.8	11.0	11.1	11.1	11.0	11.2	8.9	9.2	5.2	32
34	10.0	10.0	10.0	10.3	10.3	10.5	10.6	10.6	10.6	10.7	10.9	8.6	9.0	5.2	34
36	9.4	9.4	9.4	9.7	9.8	9.9	10.2	10.2	10.3	10.4	10.5	8.4	8.7	5.0	36
38	8.9	9.0	9.0	9.4	9.4	9.4	9.6	9.7	9.8	9.9	10.0	8.0	8.3	4.5	38
40	8.5	8.6	8.6	8.9	8.9	9.0	9.3	9.2	9.3	9.5	9.6	7.6	7.9	3.8	40
42	8.1	8.2	8.2	8.5	8.5	8.6	8.9	8.8	8.9	9.1	9.2	7.2	7.5	3.1	42
44	7.7	7.8	7.8	8.0	8.1	8.2	8.5	8.4	8.5	8.7	8.7	6.9	7.1	2.4	44
46	7.3	7.4	7.4	7.7	7.7	7.7	8.0	8.0	8.1	8.3	8.4	6.5	6.8		46
48	7.0	7.0	7.0	7.4	7.4	7.4	7.7	7.7	7.8	8.0	8.1	6.0	6.2		48
50	6.7	6.7	6.7	7.1	7.1	7.1	7.4	7.4	7.4	7.7	7.8	5.7	5.9		50
52	6.5	6.4	6.5	6.9	6.8	6.8	7.1	7.1	7.2	7.5	7.5	5.2	5.5		52
54	6.2	6.2	6.2	6.5	6.6	6.6	6.9	6.9	6.9	7.1	7.2	4.7	4.8		54
56	6.0	5.9	6.0	6.3	6.3	6.3	6.7	6.6	6.7	6.9	6.9	4.1	4.2		56
58	5.8	5.7	5.8	6.1	6.0	6.1	6.4	6.4	6.4	6.7	6.7	3.6	3.8		58
60	5.5	5.5	5.5	5.9	5.8	5.8	6.2	6.2	6.2	6.5	6.5	3.3	3.4		60
62	5.2	5.3	5.3	5.6	5.6	5.6	6.0	5.9	6.0	6.3	6.3	3.2	3.3		62
64	5.0	5.1	5.1	5.4	5.4	5.4	5.8	5.7	5.8	6.1	6.1	2.6	2.6		64
66	4.9	4.9	5.0	5.2	5.2	5.2	5.6	5.5	5.3	5.9	5.5	2.5	2.5		66
68	4.7	4.8	4.6	5.0	5.1	4.6	5.3	5.0	4.7	5.6	4.9	2.0	2.4		68
70	4.6	4.6	4.0	4.9	4.6	3.9	4.8	4.3	4.0	5.0	4.2				70
72	4.4	4.5	3.4	4.4	4.0	3.3	4.2	3.7	3.5	4.4	3.7				72
74	4.1	3.9	2.8	3.9	3.4	2.8	3.6	3.2	2.9	3.8	3.1				74
76	3.6	3.4	2.3	3.3	2.9	2.3	3.1	2.7	2.4	3.3	2.6				76
78	3.1	2.9		2.8	2.4		2.6	2.2		2.8	2.1				78
80	2.6	2.4		2.3			2.1			2.3					80
82	2.2														82
组合 Code	121111	211111	222100	122111	221111	222200	122220	222111	222210	122221	222211	122222	222221	222222	组合 Code
倍率 n	2	2	2	2	2	2	2	2	2	2	2	1	1	1	倍率 n



起重性能表
Rated lifting load table

T 53.1~79.5 m

53.1-79.5 m 6.5 m 30 m 9.4×9.6 m 360° 153 t 															
	53.1	53.1	53.1	58.4	58.4	58.4	63.6	63.6	63.6	68.9	68.9	74.2	74.2	79.5	
	6.5m														
	0°														
	30 m														
16	20.1	20.1	20.0												16
18	18.9	18.8	18.9	18.8	18.9	19.1	18.7	18.9	19.2						18
20	17.4	17.5	17.5	17.9	17.8	18.0	18.0	18.0	18.1	17.5	17.8				20
22	16.2	16.1	16.3	16.7	16.6	16.8	17.1	17.2	17.3	16.8	17.1	14.6	15.0		22
24	15.1	15.0	15.1	15.5	15.6	15.6	15.9	16.1	16.2	16.0	16.3	14.1	14.4	6.9	24
26	14.1	14.1	14.2	14.6	14.6	14.7	15.1	15.1	15.0	15.3	15.4	13.5	13.9	6.9	26
28	13.1	13.3	13.4	13.7	13.8	13.8	14.2	14.1	14.3	14.3	14.7	13.0	13.3	6.9	28
30	12.4	12.5	12.6	12.8	13.0	12.9	13.3	13.4	13.5	13.5	13.9	12.4	12.7	6.9	30
32	11.8	11.7	11.8	12.2	12.2	12.3	12.7	12.8	12.7	13.0	13.1	11.8	12.1	6.9	32
34	11.2	11.2	11.2	11.6	11.6	11.7	12.0	12.0	12.1	12.4	12.4	11.3	11.5	6.9	34
36	10.7	10.7	10.8	11.0	11.1	11.1	11.5	11.4	11.5	11.8	12.0	10.8	10.9	6.9	36
38	10.5	10.5	10.5	10.7	10.8	10.8	11.0	11.0	10.9	11.2	11.4	10.2	10.2	6.2	38
40	9.9	9.9	10.0	10.4	10.4	10.5	10.8	10.7	10.8	10.9	10.9	9.7	9.7	5.4	40
42	9.5	9.5	9.6	10.0	10.0	10.0	10.4	10.5	10.4	10.7	10.8	9.2	9.3	5.0	42
44	9.1	9.1	9.2	9.6	9.6	9.5	10.0	9.9	10.0	10.3	10.4	8.8	8.8	4.6	44
46	8.7	8.7	8.7	9.2	9.2	9.1	9.6	9.5	9.6	9.9	10.0	8.4	8.5	4.1	46
48	8.3	8.3	8.3	8.8	8.8	8.8	9.2	9.1	9.2	9.5	9.6	8.0	8.2	3.4	48
50	7.9	7.9	8.0	8.4	8.4	8.5	8.8	8.9	8.8	9.3	9.3	7.8	7.8	3.0	50
52	7.7	7.7	7.7	8.1	8.1	8.1	8.5	8.5	8.6	8.9	8.9	7.5	7.5	2.5	52
54	7.3	7.3	7.4	7.8	7.8	7.8	8.2	8.2	8.2	8.6	8.7	7.2	7.2	2.0	54
56	7.1	7.1	7.1	7.5	7.6	7.5	8.0	7.9	8.0	8.3	8.3	7.0	7.0		56
58	6.8	6.8	6.8	7.2	7.2	7.3	7.6	7.7	7.6	8.1	8.1	6.8	6.7		58
60	6.6	6.6	6.6	7.0	6.9	7.0	7.4	7.4	7.2	7.8	7.5	6.8	6.2		60
62	6.4	6.4	6.2	6.8	6.7	6.2	7.2	6.7	6.4	7.4	6.7	6.6	5.9		62
64	6.2	6.2	5.5	6.6	6.2	5.5	6.4	5.9	5.7	6.7	5.9	6.0	5.2		64
66	6.0	5.9	4.8	5.9	5.5	4.8	5.7	5.2	4.9	5.9	5.2	6.0	5.2		66
68	5.5	5.2	4.1	5.2	4.8	4.1	5.1	4.6	4.3	5.3	4.5	5.3	4.5		68
70	4.9	4.6	3.5	4.6	4.2	3.5	4.4	3.9	3.7	4.7	3.9	4.5	3.8		70
72	4.3	4.0	2.9	4.0	3.6	2.9	3.8	3.4	3.1	4.1	3.3	4.2	3.4		72
74	3.7	3.4	2.3	3.5	3.0	2.3	3.3	2.8	2.5	3.5	2.8	3.6	2.8		74
76	3.2	2.9		2.9	2.5		2.8	2.3	2.0	3.0	2.2	3.0	2.3		76
78	2.7	2.4		2.4	2.0		2.3			2.5		2.7			78
80	2.2			1.9						2.0		2.2			80
组合 Code	121111	211111	222100	122111	221111	222200	122220	222111	222210	122221	222211	122222	222221	222222	组合 Code
倍率 n	2	2	2	2	2	2	2	2	2	2	2	2	2	1	倍率 n

起重性能表
Rated lifting load table

T 53.1~79.5 m

53.1-79.5 m 6.5 m 24 m 9.4×9.6 m 360° 153 t 															
m 53.1 53.1 53.1 58.4 58.4 58.4 63.6 63.6 63.6 68.9 68.9 74.2 74.2 79.5 m															
6.5m															
0°															
24 m															
14	26.0	26.2	26.3												14
16	24.5	24.7	24.8	24.7	24.6	24.7									16
18	23.1	23.2	23.3	23.2	23.1	23.6	23.2	23.4	23.6	22.6	22.8				18
20	21.8	21.8	21.9	22.1	22.0	22.2	22.1	22.3	22.5	21.7	21.9	19.9	19.8		20
22	20.6	20.6	20.7	20.9	21.0	21.2	21.1	21.2	21.4	20.8	21.1	19.4	18.9	11.7	22
24	19.5	19.7	19.8	20.0	20.1	20.2	20.3	20.3	20.3	19.8	20.1	18.9	18.0	11.0	24
26	18.3	18.6	18.7	19.0	19.1	19.2	19.4	19.5	19.6	19.0	19.2	16.3	17.0	10.4	26
28	17.2	17.4	17.5	17.9	18.0	18.0	18.6	18.5	18.8	18.1	18.4	15.5	16.1	9.7	28
30	16.2	16.4	16.4	17.1	17.0	17.2	17.7	17.8	17.8	17.3	17.5	14.8	15.4	9.1	30
32	15.4	15.5	15.6	16.1	16.3	16.2	16.8	16.8	17.0	16.6	16.8	14.1	14.6	8.4	32
34	14.6	14.5	14.8	15.3	15.5	15.4	16.0	16.0	16.2	15.9	16.1	13.5	13.9	7.9	34
36	13.9	13.8	14.0	14.5	14.7	14.6	15.3	15.3	15.4	15.3	15.4	12.7	13.3	7.5	36
38	13.3	13.2	13.3	13.9	13.9	14.0	14.6	14.6	14.6	14.6	14.6	12.2	12.7	7.1	38
40	12.7	12.6	12.7	13.3	13.3	13.4	13.9	14.0	14.0	13.8	13.9	11.7	12.2	6.8	40
42	12.1	12.1	12.1	12.7	12.9	12.8	13.4	13.5	13.5	13.2	13.2	11.2	11.7	6.5	42
44	11.5	11.6	11.7	12.3	12.3	12.2	12.9	12.9	12.9	12.4	12.5	10.8	11.2	6.1	44
46	11.1	11.1	11.1	11.7	11.8	11.8	12.4	12.4	12.4	11.8	11.8	10.3	10.8	5.8	46
48	10.9	10.9	10.9	11.3	11.3	11.4	11.9	12.0	12.0	11.3	11.3	9.8	10.1	5.5	48
50	10.6	10.6	10.6	10.9	10.9	11.0	11.5	11.6	11.2	9.5	8.8	9.5	9.7	5.2	50
52	10.2	10.2	10.3	10.8	10.8	10.3	11.1	10.4	10.4	9.0	8.3	9.5	9.0	5.0	52
54	9.9	9.9	9.2	10.4	9.6	9.2	10.3	9.6	9.5	8.5	7.8	8.9	8.3	4.8	54
56	9.6	9.4	8.1	9.5	8.8	8.2	9.3	8.8	8.5	8.1	7.4	8.2	7.5	4.5	56
58	8.7	8.5	7.2	8.5	8.0	7.3	8.4	7.9	7.5	7.7	7.0	8.2	7.5	4.1	58
60	7.9	7.6	6.3	7.7	7.2	6.4	7.5	7.0	6.7	7.4	6.6	7.5	6.8	3.7	60
62	7.0	6.8	5.5	6.8	6.3	5.6	6.7	6.2	5.9	7.0	6.2	6.8	6.0	3.4	62
64	6.3	6.0	4.8	6.1	5.6	4.9	5.9	5.4	5.1	6.2	5.4	6.1	5.3	3.0	64
66	5.6	5.3	4.0	5.4	4.9	4.1	5.2	4.7	4.4	5.5	4.7	5.3	4.5	2.9	66
68	4.9	4.6	3.4	4.7	4.2	3.5	4.6	4.0	3.7	4.9	4.1	5.1	4.2	2.6	68
70	4.2	4.0	2.7	4.1	3.6	2.8	3.9	3.4	3.1	4.2	3.4	4.5	3.6	2.3	70
72	3.6	3.4	2.1	3.5	3.0	2.2	3.3	2.8	2.5	3.6	2.9	3.9	3.0	2.2	72
74	3.1	2.8		2.9	2.4		2.8	2.3	2.0	3.1	2.3	3.3	2.5	1.9	74
76	2.5	2.2		2.4			2.3			2.6		2.8	2.0	1.8	76
78										2.1		2.3			78
组合 Code	121111	211111	222100	122111	222111	222200	122220	222111	222210	122221	222211	122222	222221	222222	组合 Code
倍率 n	2	2	2	2	2	2	2	2	2	2	2	2	2	1	倍率 n

起重性能表
Rated lifting load table

T 53.1~79.5 m

53.1-79.5 m 6.5 m 18 m 9.4×9.6 m 360° 153 t SL m 53.1 53.1 53.1 58.4 58.4 58.4 63.6 63.6 63.6 68.9 68.9 74.2 74.2 79.5 m															
6.5m															
0°															
18 m															
12	38.2	37.9	38.1												12
14	35.1	35.0	35.6	35.5	35.3	35.6									14
16	32.3	32.2	32.7	33.1	32.8	33.2	31.5	33.8	34.0						16
18	29.8	29.8	30.2	29.9	29.7	29.9	30.0	30.5	31.0	26.3	26.8	24.2	25.5		18
20	27.8	27.8	27.8	28.3	28.3	28.4	28.5	28.4	28.9	24.8	25.3	22.9	24.3	14.5	20
22	25.9	25.8	26.0	26.8	27.1	27.2	26.9	26.9	27.3	23.7	24.3	21.8	23.1	13.9	22
24	24.2	24.2	24.4	25.3	25.3	25.6	25.3	25.3	25.5	22.6	23.0	20.5	21.8	13.2	24
26	22.6	22.6	22.8	23.7	23.9	24.0	23.9	23.9	23.9	21.6	22.0	19.4	20.6	12.6	26
28	21.6	21.7	21.8	22.3	22.6	22.5	22.7	22.7	22.6	20.5	20.9	18.3	19.4	11.9	28
30	20.7	20.8	20.8	21.5	21.6	21.5	21.4	21.4	21.1	19.4	19.7	17.1	18.3	11.3	30
32	19.6	19.6	19.9	20.9	20.8	20.9	20.0	20.1	20.0	18.3	18.7	16.7	17.5	10.7	32
34	18.7	18.7	18.8	19.5	19.5	19.5	18.9	18.9	18.9	17.0	17.7	15.9	16.6	10.1	34
36	17.9	17.9	17.9	18.4	18.5	18.6	17.7	17.7	17.8	16.3	16.7	15.0	15.6	9.6	36
38	17.1	17.1	17.1	17.6	17.6	17.6	17.3	17.3	16.9	15.4	15.9	14.2	14.8	9.0	38
40	16.2	16.3	16.3	15.0	15.0	14.6	14.6	14.6	14.0	13.1	13.1	13.4	13.9	8.4	40
42	15.4	15.5	15.2	14.8	14.4	13.7	13.2	13.2	13.2	12.8	12.3	12.6	13.1	8.0	42
44	14.9	15.0	14.4	13.6	12.9	12.9	13.1	12.4	12.4	12.2	11.6	12.5	12.3	7.6	44
46	14.4	14.3	12.8	13.5	12.9	12.1	12.5	12.2	11.7	11.6	10.9	12.0	11.6	7.3	46
48	13.6	12.8	11.9	12.2	12.2	11.4	11.8	11.1	11.1	11.0	10.3	10.9	10.9	7.0	48
50	12.0	12.0	10.4	11.4	10.7	9.9	11.2	10.5	10.4	10.4	9.7	10.4	9.8	6.7	50
52	11.1	10.8	9.5	10.4	9.9	9.1	10.1	10.0	9.6	9.7	9.0	9.7	9.0	6.4	52
54	10.0	9.7	8.4	9.7	9.2	8.4	9.6	9.2	8.8	9.0	8.2	9.0	8.3	6.2	54
56	9.0	8.7	7.3	8.8	8.3	7.5	8.8	8.2	7.9	8.3	7.5	8.3	7.5	5.9	56
58	8.1	7.7	6.4	7.9	7.4	6.6	7.8	7.3	6.9	7.5	6.7	7.6	6.8	5.7	58
60	7.2	6.9	5.5	7.0	6.5	5.7	7.0	6.4	6.1	6.8	6.0	6.8	6.0	5.5	60
62	6.4	6.1	4.7	6.2	5.7	4.9	6.2	5.6	5.3	6.0	5.2	6.9	5.9	5.2	62
64	5.6	5.3	4.0	5.5	4.9	4.2	5.4	4.8	4.5	5.8	4.9	6.1	5.2	4.6	64
66	4.9	4.6	3.2	4.7	4.2	3.4	4.7	4.1	3.8	5.1	4.2	5.4	4.5	4.0	66
68	4.2	3.9	2.6	4.1	3.6	2.8	4.0	3.5	3.1	4.4	3.6	4.7	3.8	3.8	68
70	3.5	3.2		3.4	2.9	2.1	3.4	2.8	2.5	3.8	2.9	4.1	3.2	3.2	70
72				2.8	2.3		2.8	2.2		3.2	2.4	3.5	2.6	2.6	72
74				2.3			2.2			2.6		3.0	2.1	2.2	74
76										2.1		2.4			76
组合 Code 倍率 n	121111	211111	222100	122111	221111	222200	122220	222111	222210	122221	222211	122222	222221	222222	组合 Code 倍率 n
	3	3	3	3	3	3	3	3	3	2	2	2	2	2	





起重性能表
Rated lifting load table

T 53.1~79.5 m

53.1-79.5 m 6.5 m 12 m 9.4×9.6 m 360° 153 t SL 53.1 53.1 53.1 58.4 58.4 58.4 63.6 63.6 63.6 68.9 68.9 74.2 74.2 79.5															
6.5m 0° 12 m															
12	51.4	51.7	52.1												12
14	48.0	48.1	48.5	47.1	47.5	47.9									14
16	44.9	44.8	45.2	43.1	43.2	43.6	39.4	39.4	39.9						16
18	41.0	41.2	41.5	39.9	39.7	40.0	36.1	36.2	36.8	38.0	38.0				18
20	37.7	38.0	38.2	36.4	36.5	36.7	31.2	31.3	31.7	32.0	33.4	25.0	30.0	27.5	20
22	34.6	34.9	35.2	32.8	33.2	33.1	29.4	30.1	29.6	27.5	28.3	24.6	27.6	27.0	22
24	30.9	31.0	31.2	29.7	29.8	29.6	27.0	27.7	27.5	24.9	26.5	24.3	25.7	16.8	24
26	28.6	28.6	28.7	28.8	28.9	27.5	24.4	26.5	25.8	23.6	24.7	23.0	24.0	16.0	26
28	28.1	27.4	26.7	26.6	25.9	25.8	23.9	24.7	24.3	23.0	23.3	21.4	22.5	15.1	28
30	26.6	26.6	25.1	25.7	25.0	24.2	23.0	22.8	22.8	21.6	22.0	20.3	21.0	14.3	30
32	25.3	25.3	23.7	23.6	23.6	22.8	22.1	21.4	21.4	20.4	20.6	19.5	19.8	13.6	32
34	23.2	23.2	21.6	23.0	22.2	21.5	21.0	21.0	20.3	19.4	19.4	18.1	18.7	13.0	34
36	21.6	20.8	20.0	20.8	20.8	20.0	19.9	19.1	19.1	19.2	18.4	17.1	17.5	12.4	36
38	20.0	19.2	18.4	19.2	18.4	18.4	18.9	18.1	18.1	18.2	17.4	16.7	16.4	11.9	38
40	17.6	17.6	16.8	17.6	16.8	16.8	17.6	16.8	16.8	17.2	16.4	16.2	15.5	11.4	40
42	16.8	16.0	15.2	16.0	16.0	15.2	16.0	15.2	15.2	16.0	15.2	15.2	14.6	10.9	42
44	15.2	15.2	13.6	15.2	14.4	13.6	14.4	14.4	13.6	15.2	14.4	14.5	13.8	10.4	44
46	13.6	13.6	12.0	13.6	12.8	12.6	13.6	12.8	12.8	13.6	12.8	13.3	12.5	10.0	46
48	12.7	12.3	10.9	12.6	12.0	11.2	12.0	12.0	11.2	12.8	12.0	11.6	10.9	9.8	48
50	11.4	11.0	9.6	11.2	10.7	9.9	11.2	10.4	10.3	11.2	10.4	10.9	10.1	9.2	50
52	10.2	9.9	8.4	10.1	9.6	8.7	10.1	9.5	9.2	10.4	9.6	10.3	9.4	8.8	52
54	9.1	8.8	7.3	9.0	8.5	7.6	9.0	8.4	8.1	9.5	8.6	9.4	8.6	8.1	54
56	8.1	7.7	6.3	8.0	7.5	6.6	8.0	7.4	7.1	8.5	7.6	8.6	7.8	7.5	56
58	7.1	6.8	5.3	7.1	6.5	5.7	7.1	6.5	6.1	7.6	6.7	8.0	7.0	6.8	58
60	6.2	5.9	4.5	6.2	5.6	4.8	6.2	5.6	5.3	6.7	5.8	7.1	6.2	5.6	60
62	5.4	5.1	3.6	5.4	4.8	4.0	5.4	4.8	4.5	5.9	5.0	6.3	5.4	4.8	62
64	4.6	4.3	2.9	4.6	4.1	3.2	4.7	4.1	3.7	5.2	4.3	5.6	4.6	4.2	64
66				3.9	3.3	2.5	4.0	3.4	3.0	4.5	3.5	4.9	3.9	3.6	66
68				3.2	2.7		3.3	2.7	2.3	3.8	2.9	4.2	3.2	3.0	68
70				2.5	2.0		2.6	2.1		3.2	2.3	3.6	2.6	2.4	70
72							2.0			2.6		3.0	2.0	1.9	72
74										2.0		2.4			74
组合 Code	121111	211111	222100	122111	221111	222200	122220	222111	222210	122221	222211	122222	222221	222222	组合 Code
倍率 n	4	4	4	4	4	4	3	3	3	3	3	2	3	3	倍率 n

起重性能表
Rated lifting load table

T 53.1~79.5 m

53.1-79.5 m 6.5 m 6 m 9.4×9.6 m 360° 153 t 															
	53.1	53.1	53.1	58.4	58.4	58.4	63.6	63.6	63.6	68.9	68.9	74.2	74.2	79.5	
6.5m															
0°															
6 m															
10	63.0	64.0	65.0												10
12	61.8	62.8	62.8	62.0	61.7	61.2									12
14	60.9	60.9	60.9	58.0	58.0	58.0	58.0	59.8	59.1						14
16	57.9	57.9	57.9	55.0	55.0	55.0	52.8	54.8	53.9	45.0	47.0				16
18	53.6	52.8	52.0	51.8	52.0	51.0	48.3	50.0	49.2	41.9	43.5	41.4	43.0		18
20	48.0	47.2	46.4	47.2	46.4	45.6	44.4	45.6	44.8	40.2	41.0	36.6	38.0	25.0	20
22	43.2	42.4	41.6	42.4	41.6	40.8	40.6	41.6	40.8	37.0	37.9	34.0	35.0	23.5	22
24	38.4	38.4	37.6	38.4	37.6	36.8	37.6	37.6	36.8	34.3	35.2	29.8	30.5	22.6	24
26	35.2	35.2	33.6	34.4	34.4	32.0	34.4	33.6	32.0	31.9	30.7	27.8	28.3	21.4	26
28	30.4	30.4	28.8	30.4	29.6	28.8	29.6	29.6	28.8	29.5	28.8	26.1	26.6	20.3	28
30	28.0	27.2	26.4	27.2	27.2	26.4	27.2	26.4	26.4	27.2	26.4	24.4	25.0	19.0	30
32	25.6	24.8	24.0	24.8	24.0	24.0	24.8	24.0	24.0	24.8	24.0	23.6	23.2	18.1	32
34	23.2	22.4	21.6	22.4	22.4	21.6	22.4	21.6	21.6	22.4	21.6	22.4	21.6	17.3	34
36	20.8	20.8	19.2	20.8	20.0	19.2	20.8	20.0	19.2	20.8	20.0	20.8	20.0	16.4	36
38	19.2	18.4	17.6	19.2	18.4	17.6	18.4	18.4	17.6	19.2	18.4	19.2	18.4	15.4	38
40	17.6	16.8	16.0	17.6	16.8	16.0	16.8	16.8	16.0	17.6	16.8	17.6	16.8	14.7	40
42	16.0	15.2	14.3	16.0	15.2	14.4	15.2	15.2	14.4	16.0	15.2	16.0	15.2	13.7	42
44	14.4	14.2	12.6	14.4	13.6	12.8	14.4	13.6	13.6	14.4	13.6	14.4	13.6	13.0	44
46	12.8	12.6	11.0	12.8	12.4	11.5	12.8	12.5	12.0	13.6	12.8	13.6	12.8	11.8	46
48	11.6	11.2	9.6	11.7	11.0	10.1	11.8	11.1	10.7	12.0	11.2	12.8	11.2	10.4	48
50	10.3	9.9	8.3	10.4	9.7	8.8	10.4	9.8	9.4	11.1	10.1	11.2	10.4	9.9	50
52	9.1	8.7	7.1	9.2	8.6	7.6	9.3	8.7	8.3	9.9	8.9	10.4	9.4	8.9	52
54	8.0	7.6	6.0	8.1	7.5	6.5	8.2	7.6	7.2	8.8	7.9	9.4	8.3	8.4	54
56	7.0	6.6	5.0	7.1	6.5	5.5	7.2	6.6	6.2	7.8	6.9	8.4	7.3	7.7	56
58	6.0	5.7	4.1	6.1	5.5	4.6	6.3	5.6	5.2	6.9	5.9	7.4	6.4	6.9	58
60	4.3	4.1	2.4	5.3	4.6	3.7	5.4	4.8	4.4	6.0	5.1	6.6	5.5	6.0	60
62				4.4	3.8	2.9	4.6	3.9	3.6	5.2	4.3	5.8	4.7	5.2	62
64				3.6	3.0	2.1	3.8	3.2	2.8	4.5	3.5	5.0	4.0	4.5	64
66							3.1	2.5	2.1	3.8	2.8	4.3	3.2	3.8	66
68							2.4			3.1	2.1	3.6	2.6	3.1	68
70										2.5		3.0	2.0	2.5	70
72												2.4		1.9	72
组合 Code	121111	211111	222100	122111	221111	222200	122220	222111	222210	122221	222211	122222	222221	222222	组合 Code
倍率 n	5	5	5	5	5	5	5	5	5	4	4	4	4	2	倍率 n

起升高度曲线图
Lifting height chart

主臂+超起+副臂
Boom+ Super lifting device + Jib



起重性能表




Rated lifting load table

T 53.1~68.9 m

53.1-68.9 m 6.5 m 42 m 9.4×9.6 m 360° 153 t SL													
	53.1	53.1	53.1	58.4	58.4	58.4	63.6	63.6	63.6	68.9	68.9		
	6.5m												
	20°												
	42 m												
32	5	5.1	5.1									32	
34	4.8	4.9	5.0	4.9	4.9	4.9						34	
36	4.6	4.7	4.8	4.7	4.7	4.7	4.8	4.9	4.9			36	
38	4.5	4.5	4.6	4.5	4.5	4.6	4.7	4.7	4.7			38	
40	4.3	4.3	4.4	4.4	4.4	4.4	4.5	4.5	4.5	4.6	4.5	40	
42	4.1	4.1	4.2	4.2	4.2	4.3	4.3	4.3	4.3	4.4	4.4	42	
44	4.0	4.0	4.0	4.1	4.1	4.1	4.2	4.2	4.2	4.3	4.2	44	
46	3.9	3.8	3.8	4.0	3.9	4.0	4.0	4.0	4.0	4.1	4.2	46	
48	3.7	3.7	3.7	3.8	3.8	3.9	3.9	3.9	3.9	4.0	4.0	48	
50	3.6	3.6	3.6	3.7	3.7	3.7	3.8	3.8	3.8	3.9	3.8	50	
52	3.5	3.5	3.5	3.6	3.5	3.6	3.7	3.7	3.7	3.8	3.7	52	
54	3.4	3.4	3.4	3.5	3.4	3.5	3.6	3.6	3.6	3.7	3.6	54	
56	3.3	3.3	3.2	3.3	3.3	3.4	3.5	3.5	3.5	3.6	3.5	56	
58	3.2	3.2	3.1	3.2	3.2	3.2	3.4	3.4	3.4	3.5	3.4	58	
60	3.1	3.1	3.0	3.1	3.1	3.1	3.3	3.3	3.3	3.4	3.3	60	
62	3.0	3.0	3.0	3.0	3.0	3.0	3.2	3.2	3.2	3.3	3.3	62	
64	2.9	2.9	2.9	3.0	3.0	3.0	3.1	3.1	3.1	3.2	3.2	64	
66	2.8	2.8	2.8	2.9	2.9	2.9	3.0	3.0	3.0	3.2	3.1	66	
68	2.7	2.7	2.7	2.8	2.8	2.8	3.0	2.9	2.9	3.1	3.0	68	
70	2.7	2.6	2.6	2.7	2.7	2.7	2.9	2.9	2.9	3.0	3.0	70	
72	2.6	2.6	2.6	2.7	2.7	2.7	2.8	2.8	2.8	3.0	2.9	72	
74	2.5	2.5	2.5	2.6	2.6	2.6	2.8	2.7	2.7	2.9	2.8	74	
76	2.4	2.4	2.4	2.5	2.5	2.5	2.7	2.7	2.7	2.8	2.8	76	
78	2.4	2.4	2.4	2.5	2.5	2.5	2.6	2.6	2.6	2.7	2.7	78	
80	2.3	2.3	2.3	2.4	2.4	2.4	2.6	2.6	2.6	2.7	2.7	80	
82	2.3	2.2	2.3	2.4	2.4	2.4	2.5	2.5	2.5	2.6	2.6	82	
84	2.2	2.2	2.2	2.3	2.3	2.2	2.4	2.4	2.4	2.6	2.6	84	
86	2.2	2.2		2.3	2.3		2.4	2.1		2.5	2.1	86	
88	2.1	2.1		2.1			2.0			2.2		88	
组合 Code	121111	211111	222100	122111	221111	222200	122220	222111	222210	122221	222211	组合 Code	
倍率 n	1	1	1	1	1	1	1	1	1	1	1	倍率 n	



起重性能表
Rated lifting load table

T 53.1~74.2 m

53.1-74.2 m 6.5 m 36 m 9.4×9.6 m 360° 153 t 														
m 53.1 53.1 53.1 58.4 58.4 58.4 63.6 63.6 63.6 68.9 68.9 74.2 74.2 m														
6.5m														
20°														
36 m														
30	6.7	6.7	6.8	6.8	6.8	6.8								30
32	6.4	6.4	6.5	6.6	6.6	6.6	6.7	6.6	6.6					32
34	6.2	6.2	6.3	6.3	6.3	6.3	6.4	6.4	6.5	6.5	6.4			34
36	6.0	6.0	6.0	6.1	6.1	6.1	6.2	6.1	6.2	6.3	6.2	6.4	6.4	36
38	5.8	5.8	5.8	5.9	5.8	5.9	6.0	5.9	6.0	6.1	6.0	6.3	6.2	38
40	5.6	5.6	5.6	5.7	5.6	5.7	5.8	5.7	5.8	5.9	5.8	6.1	6.0	40
42	5.4	5.3	5.4	5.5	5.4	5.5	5.6	5.6	5.6	5.7	5.7	5.9	5.8	42
44	5.2	5.1	5.2	5.3	5.3	5.3	5.4	5.4	5.5	5.5	5.6	5.2	5.2	44
46	5.0	5.0	5.0	5.1	5.1	5.1	5.3	5.3	5.3	5.3	5.4	4.6	4.5	46
48	4.9	4.8	4.9	5.0	4.9	5.0	5.1	5.1	5.2	5.2	5.3	4.1	4.1	48
50	4.7	4.7	4.7	4.8	4.8	4.8	5.0	5.0	5.0	5.1	5.1	3.7	3.6	50
52	4.6	4.6	4.6	4.7	4.7	4.7	4.9	4.9	4.9	4.9	5.0	3.2	3.2	52
54	4.4	4.4	4.5	4.6	4.5	4.6	4.7	4.7	4.7	4.9	4.9	2.8	2.7	54
56	4.3	4.3	4.3	4.4	4.4	4.4	4.6	4.6	4.6	4.7	4.8	2.2	2.2	56
58	4.2	4.2	4.2	4.3	4.3	4.3	4.5	4.5	4.5	4.6	4.6	2.0	2.0	58
60	4.1	4.1	4.1	4.2	4.2	4.2	4.4	4.4	4.4	4.5	4.5	1.9		60
62	4.0	4.0	4.0	4.1	4.1	4.1	4.3	4.2	4.3	4.4	4.4			62
64	3.9	3.9	3.9	4.0	4.0	4.0	4.2	4.1	4.2	4.3	4.4			64
66	3.8	3.7	3.8	3.9	3.9	3.9	4.1	4.0	4.1	4.3	4.3			66
68	3.6	3.7	3.7	3.8	3.8	3.8	4.0	4.0	4.0	4.2	4.2			68
70	3.6	3.6	3.6	3.8	3.8	3.8	3.9	3.9	3.9	4.1	4.1			70
72	3.5	3.5	3.5	3.7	3.7	3.7	3.8	3.8	3.8	4.0	3.9			72
74	3.4	3.4	3.4	3.6	3.6	3.6	3.7	3.7	3.7	3.9	3.9			74
76	3.4	3.4	3.4	3.5	3.5	3.5	3.7	3.7	3.7	3.9	3.8			76
78	3.3	3.3	3.0	3.5	3.5	3.1	3.6	3.6	3.3	3.7	3.6			78
80	3.3	3.3	2.4	3.4	3.1	2.5	3.4	3.0	2.8	3.7	3.0			80
82	3.1	2.9		3.0	2.6	2.0	2.9	2.5	2.2	3.1	2.5			82
84	2.5	2.3		2.5	2.1		2.4	2.0		2.6	2.0			84
86	2.0									2.2				86
组合 Code	121111	211111	222100	122111	221111	222200	122220	222111	222210	122221	222211	122222	222221	组合 Code
倍率 n	1	1	1	1	1	1	1	1	1	1	1	1	1	倍率 n

起重性能表
Rated lifting load table

T 53.1~79.5 m

																
		53.1	53.1	53.1	58.4	58.4	58.4	63.6	63.6	63.6	68.9	68.9	74.2	74.2	79.5	
		6.5m														
		20°														
	30 m															
26		8.6	8.6	8.6												26
28		8.2	8.2	8.2	8.3	8.4	8.4	8.5	8.5	8.5						28
30		7.9	7.9	8.0	8.1	8.1	8.0	8.2	8.2	8.2						30
32		7.6	7.6	7.7	7.7	7.8	7.8	7.9	7.9	8.0	8.0	8.2				32
34		7.3	7.3	7.4	7.5	7.6	7.5	7.6	7.7	7.7	7.8	7.8	8.0	8.1		34
36		7.1	7.1	7.2	7.3	7.2	7.3	7.4	7.4	7.5	7.6	7.6	7.8	7.9	5.1	36
38		6.9	6.9	7.0	7.1	7.0	7.0	7.2	7.2	7.2	7.4	7.4	7.6	7.5	4.7	38
40		6.6	6.7	6.7	6.8	6.8	6.8	7.0	7.0	7.0	7.1	7.2	7.4	7.3	4.3	40
42		6.4	6.4	6.5	6.6	6.6	6.6	6.8	6.8	6.8	6.9	7.0	7.2	7.1	3.9	42
44		6.2	6.2	6.3	6.4	6.4	6.4	6.6	6.6	6.6	6.7	6.8	6.9	6.8	3.5	44
46		6.0	6.0	6.1	6.2	6.2	6.2	6.4	6.4	6.4	6.5	6.6	6.7	6.6	3.0	46
48		5.9	5.9	5.9	6.1	6.0	6.0	6.2	6.3	6.2	6.5	6.5	6.4	6.4	2.6	48
50		5.7	5.7	5.8	5.9	5.9	5.9	6.1	6.1	6.1	6.3	6.3	6.2	6.2	2.2	50
52		5.6	5.6	5.6	5.7	5.7	5.7	5.9	6.0	6.0	6.1	6.2	6.0	6.0	1.8	52
54		5.4	5.4	5.4	5.6	5.6	5.6	5.8	5.8	5.8	6.0	6.0	5.9	5.8		54
56		5.3	5.3	5.3	5.5	5.5	5.5	5.7	5.7	5.7	5.9	5.9	5.6	5.6		56
58		5.2	5.2	5.2	5.4	5.3	5.4	5.6	5.6	5.6	5.8	5.8	5.4	5.3		58
60		5.1	5.1	5.1	5.2	5.2	5.2	5.4	5.5	5.5	5.6	5.7	4.9	4.9		60
62		5.0	5.0	5.0	5.2	5.1	5.1	5.3	5.3	5.3	5.6	5.5	4.6	4.5		62
64		4.9	4.9	4.9	5.0	5.0	5.0	5.2	5.2	5.2	5.4	5.4	4.5	4.4		64
66		4.8	4.8	4.8	4.9	4.9	4.9	5.1	5.1	5.1	5.4	5.3	4.1	4.0		66
68		4.7	4.7	4.7	4.8	4.8	4.8	5.1	5.0	5.0	5.2	5.2	3.7	3.6		68
70		4.6	4.6	4.6	4.7	4.8	4.8	5.0	4.9	4.9	5.1	5.1	3.2	3.1		70
72		4.5	4.5	4.0	4.7	4.7	4.2	4.8	4.7	4.5	5.0	4.8	3.1	3.0		72
74		4.4	4.4	3.4	4.6	4.2	3.5	4.5	4.1	3.8	4.8	4.1	3.1	2.7		74
76		4.0	3.8	2.7	4.0	3.5	2.9	3.9	3.5	3.2	4.2	3.5	2.7	2.3		76
78		3.4	3.2	2.1	3.4	2.9	2.3	3.3	2.9	2.6	3.6	3.0	2.7	2.2		78
80		2.8	2.6		2.8	2.4		2.8	2.3	2.0	3.1	2.4	2.7	2.1		80
82		2.2	2.0		2.2			2.2			2.6		2.7	2.0		82
84											2.1		2.3			84
组合 Code		121111	211111	222100	122111	221111	222200	122220	222111	222210	122221	222211	122222	222221	222222	组合 Code
倍率 n		1	1	1	1	1	1	1	1	1	1	1	1	1	1	倍率 n





起重性能表
Rated lifting load table

T 53.1~79.5 m

	53.1	53.1	53.1	58.4	58.4	58.4	63.6	63.6	63.6	68.9	68.9	74.2	74.2	79.5						
	6.5m																			
	20°																			
	24 m																			
22	11.9	11.9	11.9												22					
24	11.5	11.5	11.5	11.5	11.7	11.7									24					
26	11.1	11.1	11.1	11.1	11.3	11.3	11.4	11.5	11.5	11.6	11.6				26					
28	10.9	10.9	10.9	10.9	11.0	10.9	11.0	11.1	11.1	11.3	11.2				28					
30	10.7	10.7	10.8	10.8	10.8	10.8	10.8	10.8	10.8	11.0	11.0	11.2	11.2		30					
32	10.4	10.4	10.4	10.7	10.6	10.7	10.8	10.8	10.8	10.8	10.8	11.0	10.9	6.5	32					
34	10.0	10.0	10.0	10.3	10.2	10.3	10.5	10.4	10.5	10.7	10.7	10.6	10.5	6.3	34					
36	9.7	9.7	9.6	10.0	9.9	10.0	10.1	10.2	10.2	10.4	10.4	10.2	10.2	6.0	36					
38	9.4	9.4	9.4	9.7	9.6	9.7	9.9	9.8	9.9	10.2	10.1	9.7	9.6	5.8	38					
40	9.1	9.1	9.2	9.4	9.3	9.4	9.7	9.6	9.6	9.8	9.8	9.4	9.2	5.5	40					
42	8.8	8.8	8.8	9.2	9.1	9.2	9.5	9.4	9.4	9.6	9.6	8.9	8.9	5.3	42					
44	8.5	8.5	8.6	8.9	8.9	9.0	9.1	9.2	9.2	9.4	9.4	8.6	8.7	5.0	44					
46	8.3	8.3	8.4	8.6	8.7	8.7	8.9	8.8	8.9	9.2	9.2	8.3	8.3	4.8	46					
48	8.1	8.1	8.2	8.4	8.5	8.3	8.7	8.6	8.7	9.0	9.0	8.3	8.1	4.6	48					
50	7.9	7.9	8.0	8.2	8.2	8.1	8.5	8.4	8.5	8.8	8.8	8.0	7.8	4.3	50					
52	7.7	7.7	7.7	8.0	8.0	8.0	8.3	8.2	8.3	8.6	8.6	7.8	7.6	3.9	52					
54	7.5	7.5	7.5	7.8	7.8	7.8	8.1	8.2	8.1	8.4	8.4	7.5	7.3	3.6	54					
56	7.4	7.4	7.3	7.6	7.7	7.6	8.0	8.0	7.9	8.2	8.2	7.2	7.1	3.2	56					
58	7.2	7.2	7.3	7.5	7.5	7.5	7.8	7.8	7.7	8.2	8.2	7.1	6.9	2.8	58					
60	7.1	7.1	7.1	7.4	7.4	7.4	7.6	7.6	7.7	8.0	8.0	6.4	6.3	2.6	60					
62	6.9	6.9	6.9	7.2	7.2	7.0	7.5	7.5	7.3	7.8	7.7	6.0	5.7	2.1	62					
64	6.9	6.9	6.0	7.1	6.8	6.2	7.3	6.8	6.5	7.6	6.9	6.0	5.5		64					
66	6.6	6.3	5.2	6.5	6.0	5.4	6.5	6.0	5.7	6.8	6.1	5.8	5.2		66					
68	5.8	5.5	4.4	5.7	5.3	4.6	5.7	5.2	4.9	6.1	5.3	4.8	4.2		68					
70	5.1	4.8	3.6	5.0	4.6	3.9	5.0	4.5	4.2	5.4	4.6	4.2	3.6		70					
72	4.4	4.1	2.9	4.3	3.9	3.2	4.3	3.9	3.6	4.7	4.0	4.1	3.4		72					
74	3.7	3.4	2.2	3.7	3.2	2.5	3.7	3.2	2.9	4.1	3.3	3.3	2.7		74					
76	3.0	2.7		3.1	2.6		3.1	2.6	2.3	3.5	2.7	2.8	2.2		76					
78				2.5	2.0		2.5	2.0		2.9	2.2	2.4			78					
80							2.0			2.4		1.9			80					
组合 Code	121111	211111	222100	122111	221111	222200	122220	222111	222210	122221	222211	122222	222221	222222	组合 Code					
倍率 n	1	1	1	1	1	1	1	1	1	1	1	1	1	1	倍率 n					

起重性能表
Rated lifting load table

T 53.1~79.5 m

53.1-79.5 m 6.5 m 18 m 9.4×9.6 m 360° 153 t 															
	53.1	53.1	53.1	58.4	58.4	58.4	63.6	63.6	63.6	68.9	68.9	74.2	74.2	79.5	
6.5m															
20°															
18 m															
18	16.7	16.7	16.7												18
20	16.0	16.0	15.9	16.2	16.2	16.2									20
22	15.2	15.4	15.3	15.7	15.7	15.8	16.1	16.0	16.0						22
24	14.8	14.8	14.7	15.0	15.0	15.1	15.6	15.5	15.5	15.9	15.8				24
26	14.2	14.2	14.3	14.6	14.5	14.6	14.9	14.8	14.9	15.5	15.3	16.1	15.7		26
28	13.8	13.8	13.8	14.2	14.1	14.2	14.5	14.4	14.5	14.9	14.8	15.7	15.4	9.2	28
30	13.4	13.4	13.3	13.6	13.7	13.7	14.1	14.1	14.1	14.3	14.3	15.2	14.8	8.9	30
32	12.8	13.0	13.0	13.2	13.4	13.2	13.5	13.7	13.7	13.9	14.0	14.5	14.3	8.6	32
34	12.4	12.6	12.6	12.8	13.0	12.8	13.1	13.3	13.3	13.5	13.6	13.8	13.7	8.3	34
36	12.0	12.2	12.2	12.5	12.6	12.5	12.7	12.9	12.9	13.1	13.2	13.3	13.2	7.9	36
38	11.8	11.8	11.8	12.2	12.2	12.2	12.5	12.5	12.5	12.9	12.9	12.9	12.8	7.6	38
40	11.4	11.4	11.5	11.9	11.9	11.8	12.3	12.3	12.3	12.7	12.7	12.7	12.5	7.3	40
42	11.2	11.2	11.2	11.6	11.6	11.5	12.0	11.9	11.9	12.5	12.4	12.4	12.1	7.0	42
44	11.0	11.0	10.9	11.3	11.3	11.3	11.7	11.7	11.7	12.2	12.1	12.0	11.7	6.7	44
46	10.9	10.9	10.8	11.1	11.1	11.1	11.3	11.5	11.3	11.5	11.6	11.7	11.3	6.4	46
48	10.8	10.8	10.8	11.0	11.0	11.0	11.1	11.1	11.1	11.1	11.1	11.3	10.9	6.2	48
50	10.8	10.8	10.7	10.9	10.9	10.9	11.0	10.9	11.0	9.5	9.5	9.7	9.4	6.0	50
52	10.4	10.6	10.5	10.8	10.8	10.8	10.9	10.8	10.9	9.1	9.1	8.8	8.8	5.7	52
54	10.4	10.2	9.6	10.7	10.4	9.9	10.8	10.4	10.3	9.0	8.6	8.7	8.4	5.5	54
56	10.1	9.8	8.5	10.0	9.5	8.8	10.0	9.5	9.2	8.8	8.1	8.7	8.0	5.3	56
58	9.0	8.8	7.5	9.0	8.5	7.8	9.0	8.5	8.2	8.4	7.7	8.2	7.5	5.1	58
60	8.1	7.8	6.5	8.0	7.6	6.8	8.1	7.5	7.2	8.1	7.3	7.8	7.1	5.0	60
62	7.2	6.9	5.6	7.2	6.7	5.9	7.2	6.6	6.3	7.6	6.8	7.6	6.8	4.8	62
64	6.3	6.0	4.7	6.3	5.8	5.1	6.3	5.8	5.5	6.8	6.0	6.8	6.0	4.6	64
66	5.5	5.2	3.9	5.5	5.0	4.3	5.6	5.0	4.7	6.0	5.2	6.1	5.3	4.4	66
68	4.7	4.4	3.1	4.8	4.3	3.5	4.8	4.3	4.0	5.3	4.5	5.3	4.5	3.9	68
70	4.0	3.7	2.4	4.1	3.5	2.8	4.1	3.6	3.3	4.6	3.8	5.0	4.1	3.7	70
72				3.4	2.9	2.1	3.5	2.9	2.6	3.9	3.1	4.3	3.4	3.1	72
74				2.7	2.2		2.8	2.3	2.0	3.3	2.5	3.7	2.8	2.6	74
76				2.1			2.2			2.7		3.1	2.2	2.0	76
78										2.2		2.6		2.0	78
80												2.0			80
组合 Code	121111	211111	222100	122111	221111	222200	122220	222111	222210	122221	222211	122222	222221	222222	组合 Code
倍率 n	2	2	2	2	2	2	2	2	2	2	2	2	2	1	倍率 n

起重性能表
Rated lifting load table

T 53.1~79.5 m

53.1-79.5 m 6.5 m 12 m 9.4×9.6 m 360° 153 t SL 53.1 53.1 53.1 58.4 58.4 58.4 63.6 63.6 63.6 68.9 68.9 74.2 74.2 79.5															
6.5m															
20°															
12 m															
16	27.2	27.2	27.7	27.5	27.4	27.5									16
18	26.4	26.4	26.6	26.4	26.6	26.7	26.5	26.5	26.5						18
20	25.3	25.2	25.4	25.5	25.6	25.7	25.4	25.6	25.7	24.8	25.1				20
22	24.5	24.4	24.6	24.4	24.7	24.8	24.6	24.5	24.6	24.0	24.4	20.0	21.0		22
24	23.7	23.7	23.8	23.5	23.9	23.8	23.9	23.8	23.8	23.1	23.2	19.0	19.8		24
26	22.5	22.9	22.7	22.7	23.1	22.8	23.1	23.0	23.1	22.4	22.3	18.3	18.8	14.0	26
28	21.7	22.1	21.8	22.0	22.3	22.2	22.3	22.3	22.3	21.3	21.5	17.7	18.0	12.9	28
30	21.3	21.3	21.4	21.4	21.7	21.6	21.3	21.6	21.7	20.0	20.3	17.1	17.4	12.4	30
32	20.9	20.9	20.7	21.0	21.2	21.1	20.5	20.5	20.5	19.0	19.2	16.3	16.7	11.9	32
34	20.1	20.1	20.2	20.3	20.5	20.4	19.5	19.5	19.5	18.1	18.3	15.4	16.1	11.3	34
36	19.7	19.7	19.8	19.2	19.4	19.2	18.0	18.3	18.4	17.2	17.4	15.1	15.6	10.9	36
38	18.9	18.9	19.1	18.4	18.3	18.1	17.9	17.8	17.5	16.3	16.6	13.9	14.5	10.5	38
40	18.5	18.5	17.6	17.9	17.9	17.2	17.5	17.5	16.7	15.7	15.8	13.5	13.8	10.0	40
42	17.6	17.6	16.0	17.6	16.8	16.0	16.7	16.7	15.9	15.6	15.1	12.8	13.1	9.3	42
44	16.0	16.0	14.4	16.0	15.2	14.4	14.3	13.6	13.6	13.6	12.9	12.6	12.4	8.9	44
46	14.4	14.4	13.4	14.4	14.4	13.6	13.6	12.8	12.8	13.0	12.2	11.9	11.6	8.6	46
48	13.6	13.3	11.9	13.6	12.8	12.0	12.3	12.3	12.2	12.4	11.7	11.6	11.0	8.3	48
50	12.0	11.9	10.6	12.0	11.7	10.9	12.0	11.8	11.2	11.1	11.1	10.5	9.8	8.0	50
52	11.0	10.7	9.3	11.0	10.4	9.6	11.1	10.4	10.2	11.2	10.4	9.9	9.1	7.7	52
54	9.8	9.5	8.1	9.9	9.3	8.5	9.9	9.3	9.0	10.4	9.6	9.1	8.4	7.5	54
56	8.7	8.4	7.0	8.8	8.2	7.4	8.8	8.3	7.9	9.4	8.5	8.4	7.7	7.2	56
58	7.7	7.4	6.0	7.8	7.2	6.4	7.9	7.3	6.9	8.4	7.5	7.8	7.0	7.0	58
60	6.7	6.4	5.0	6.8	6.3	5.5	6.9	6.3	6.0	7.4	6.6	7.2	6.3	6.3	60
62	5.8	5.5	4.1	5.9	5.4	4.6	6.1	5.5	5.1	6.6	5.7	6.5	5.6	5.4	62
64	5.0	4.6	3.2	5.1	4.6	3.7	5.2	4.7	4.3	5.8	4.9	5.8	4.9	4.7	64
66				4.3	3.8	2.9	4.5	3.9	3.5	5.0	4.2	5.1	4.2	4.0	66
68				3.6	3.0	2.2	3.7	3.2	2.8	4.3	3.4	4.6	3.7	3.7	68
70				2.8	2.3		3.0	2.5	2.1	3.6	2.8	3.9	3.0	3.0	70
72							2.4			3.0	2.1	3.2	2.3	2.3	72
74										2.4		2.9		2.0	74
76												2.3			76
组合 Code	121111	211111	222100	122111	221111	222200	122220	222111	222210	122221	222211	122222	222221	222222	组合 Code
倍率 n	3	3	3	3	3	3	2	2	2	2	2	2	2	2	倍率 n

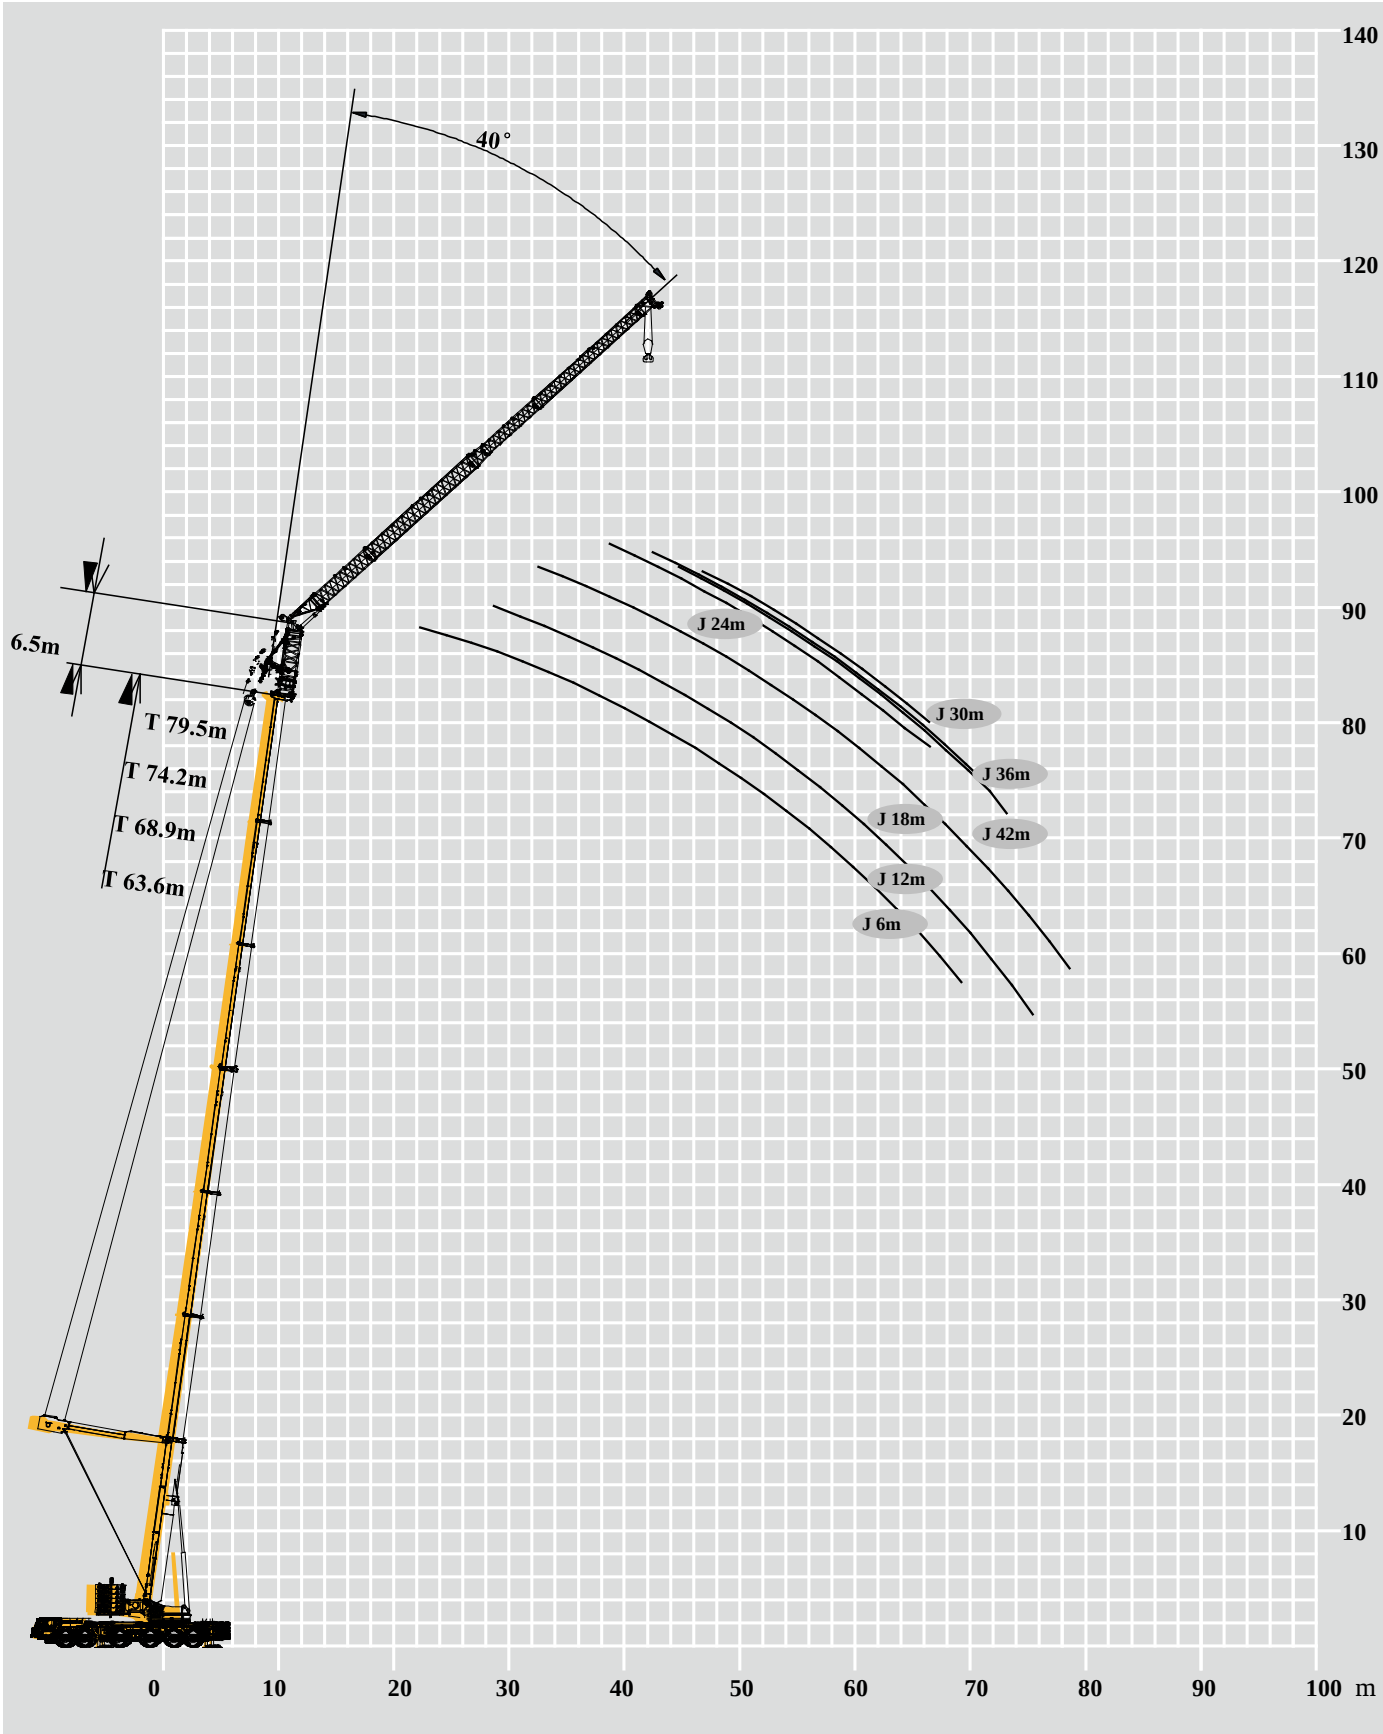
起重性能表
Rated lifting load table

T 53.1~79.5 m

53.1-79.5 m 6.5 m 6 m 9.4×9.6 m 360° 153 t SL m 6.5m 20° 6 m m															
	53.1	53.1	53.1	58.4	58.4	58.4	63.6	63.6	63.6	68.9	68.9	74.2	74.2	79.5	
	6.5m														
	20°														
	6 m														
12	36.8	36.8	36.9												12
14	35.3	35.2	35.4	35.3	35.3	35.4									14
16	33.7	33.8	33.9	33.8	33.8	33.9	33.8	33.9	34.0	33.3	33.8				16
18	32.3	32.5	32.4	32.6	33.0	33.1	32.7	32.5	32.7	32.4	32.7	29.0	29.0		18
20	31.1	31.1	31.2	31.5	31.5	31.6	31.6	31.5	31.5	30.5	31.1	28.0	28.0	24.0	20
22	29.9	30.0	30.1	30.3	30.7	30.4	30.4	30.7	30.8	28.7	29.2	25.7	26.3	21.0	22
24	28.8	29.1	28.9	29.5	29.5	29.5	28.9	29.1	29.2	27.1	27.3	24.1	24.5	19.3	24
26	28.1	28.0	28.1	28.0	28.3	28.0	27.2	27.2	27.3	25.6	25.8	22.7	23.1	18.2	26
28	27.3	27.3	27.4	26.4	26.5	26.5	25.3	25.6	25.7	24.1	24.3	21.2	21.7	17.2	28
30	26.5	26.5	26.6	24.9	24.9	25.0	23.9	24.2	24.2	22.9	22.9	19.9	20.3	16.5	30
32	25.0	25.0	24.8	23.5	23.5	22.8	23.6	22.8	22.8	22.4	21.8	18.7	19.1	15.8	32
34	23.5	23.2	22.4	22.2	22.2	21.4	22.3	21.6	21.6	21.4	20.6	18.2	18.0	15.1	34
36	20.8	20.8	20.0	20.2	19.5	18.7	18.9	18.9	18.2	18.7	18.0	17.5	16.9	14.5	36
38	19.7	19.2	18.4	18.3	18.3	17.5	18.6	17.8	17.8	17.8	17.0	16.5	15.9	14.0	38
40	17.6	17.6	16.0	17.1	17.1	16.4	17.6	16.8	16.8	16.8	16.0	15.4	14.7	13.5	40
42	16.8	16.0	15.0	15.6	15.6	14.8	16.0	15.2	15.2	14.8	14.8	14.7	14.0	13.0	42
44	15.1	14.3	13.1	14.6	13.8	13.0	13.5	13.5	12.8	13.7	13.0	13.3	12.6	12.3	44
46	13.5	13.1	11.6	13.6	12.8	12.0	13.3	12.7	12.7	13.0	12.2	11.9	11.2	10.4	46
48	12.0	11.7	10.1	12.0	11.6	10.6	12.0	11.7	11.2	12.2	11.4	11.2	10.5	9.5	48
50	10.6	10.3	8.7	10.8	10.2	9.3	11.0	10.3	10.0	11.2	10.4	9.8	9.1	8.8	50
52	9.3	9.0	7.4	9.6	9.0	8.1	9.8	9.1	8.7	10.4	9.4	9.3	8.4	7.6	52
54	8.2	7.8	6.3	8.5	7.9	6.9	8.6	8.0	7.6	9.3	8.3	8.4	7.7	7.1	54
56	7.1	6.7	5.2	7.4	6.8	5.9	7.6	7.0	6.6	8.2	7.3	7.9	7.0	6.3	56
58	6.0	5.7	4.2	6.4	5.8	4.9	6.6	6.0	5.6	7.3	6.3	7.3	6.3	5.7	58
60				5.5	4.9	4.0	5.7	5.1	4.7	6.4	5.4	6.6	5.6	5.0	60
62				4.6	4.0	3.1	4.9	4.2	3.8	5.5	4.6	5.9	4.9	4.8	62
64				3.8	3.2	2.3	4.1	3.4	3.0	4.7	3.8	5.2	4.2	4.1	64
66							3.3	2.7	2.3	4.0	3.1	4.5	3.5	3.4	66
68							2.6	2.0		3.3	2.4	3.9	2.9	3.0	68
70										2.6		3.2	2.2	2.4	70
72										2.0		2.6			72
74												2.0			74
组合 Code	121111	211111	222100	122111	221111	222200	122220	222111	222210	122221	222211	122222	222221	222222	组合 Code
倍率 n	3	3	3	3	3	3	3	3	3	3	3	3	3	2	倍率 n

起升高度曲线图
Lifting height chart

主臂+超起+副臂
Boom+ Super lifting device + Jib



起重性能表
Rated lifting load table




T 53.1~63.6 m

        										
	53.1	53.1	53.1	58.4	58.4	58.4	63.6	63.6	63.6	
	6.5m									
	40°									
	42 m									
44	2.9	2.9	2.9	2.9	2.9	2.9				44
46	2.8	2.8	2.8	2.8	2.8	2.8	2.9	2.9	2.9	46
48	2.8	2.8	2.8	2.8	2.8	2.8	2.8	2.8	2.8	48
50	2.7	2.7	2.7	2.7	2.7	2.7	2.8	2.8	2.8	50
52	2.6	2.6	2.6	2.6	2.6	2.6	2.7	2.7	2.7	52
54	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	54
56	2.5	2.5	2.5	2.5	2.5	2.5	2.6	2.6	2.6	56
58	2.4	2.4	2.4	2.5	2.5	2.5	2.5	2.5	2.5	58
60	2.4	2.3	2.4	2.4	2.4	2.4	2.5	2.5	2.5	60
62	2.3	2.3	2.3	2.4	2.4	2.4	2.4	2.4	2.4	62
64	2.3	2.3	2.3	2.3	2.3	2.3	2.4	2.4	2.4	64
66	2.2	2.2	2.2	2.3	2.3	2.3	2.4	2.3	2.4	66
68	2.2	2.2	2.2	2.3	2.3	2.3	2.3	2.3	2.3	68
70	2.2	2.2	2.2	2.2	2.2	2.2	2.3	2.3	2.3	70
72	2.1	2.1	2.1	2.2	2.2	2.2	2.3	2.2	2.2	72
74	2.1	2.1	2.1	2.2	2.2	2.2	2.2	2.2	2.2	74
76	2.1	2.1	2.1	2.1	2.1	2.1	2.2	2.2	2.2	76
78	2.1	2.1	2.1	2.1	2.1	2.1	2.2	2.2	2.2	78
80	2.1	2.1	2.0	2.1	2.1	2.1	2.1	2.1	2.1	80
82	2.0	2.0	2.0	2.1	2.1	2.1	2.1	2.1	2.1	82
84	2.0	2.0	2.0	2.1	2.1	2.1	2.1	2.1	2.1	84
86				2.1	2.1	2.1	2.1	2.1	2.1	86
88				2.1	2.1		2.1	2.1	2.1	88
90							2.1			90
组合 Code	121111	211111	222100	122111	221111	222200	122220	222111	222210	组合 Code
倍率 n	1	1	1	1	1	1	1	1	1	倍率 n

起重性能表




Rated lifting load table

T 53.1~68.9 m

												
	53.1	53.1	53.1	58.4	58.4	58.4	63.6	63.6	63.6	68.9	68.9	
	6.5m											
	40°											
	36 m											
38	4.2	4.2	4.2									38
40	4.1	4.1	4.1	4.2	4.2	4.2						40
42	4.0	4.0	4.0	4.1	4.1	4.1	4.1	4.1	4.1			42
44	3.9	3.9	3.9	4.0	4.0	4.0	4.0	4.0	4.0	4.1	4.1	44
46	3.8	3.8	3.8	3.9	3.9	3.9	3.9	3.9	3.9	4.0	4.0	46
48	3.7	3.7	3.7	3.8	3.8	3.8	3.8	3.8	3.8	3.9	3.9	48
50	3.6	3.7	3.6	3.8	3.8	3.8	3.8	3.8	3.8	3.7	3.7	50
52	3.6	3.6	3.6	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	52
54	3.5	3.5	3.5	3.6	3.6	3.6	3.7	3.7	3.7	3.7	3.7	54
56	3.5	3.5	3.5	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	56
58	3.4	3.4	3.4	3.5	3.5	3.5	3.5	3.5	3.5	3.6	3.6	58
60	3.4	3.4	3.3	3.4	3.5	3.4	3.5	3.5	3.5	3.6	3.6	60
62	3.3	3.3	3.3	3.4	3.4	3.4	3.4	3.4	3.4	3.5	3.5	62
64	3.3	3.3	3.3	3.4	3.4	3.4	3.4	3.4	3.4	3.1	3.1	64
66	3.2	3.2	3.2	3.3	3.3	3.3	3.4	3.4	3.4	2.9	2.9	66
68	3.2	3.2	3.2	3.2	3.2	3.3	3.3	3.3	3.3	2.7	2.7	68
70	3.2	3.2	3.2	3.2	3.2	3.2	3.3	3.3	3.3	2.3	2.3	70
72	3.1	3.1	3.1	3.2	3.2	3.2	3.3	3.3	3.3	1.9	1.9	72
74	3.1	3.1	3.1	3.2	3.2	3.2	3.2	3.2	3.2	1.9		74
76	3.1	3.1	3.1	3.2	3.1	3.1	3.2	3.2	3.2			76
78	3.1	3.1	3.1	3.1	3.1	3.1	3.2	3.2	3.2			78
80				3.1	3.1	3.1	3.2	3.2	3.2			80
82				3.1	3.1	2.6	3.2	3.2	3.0			82
84							3.0	2.6	2.4			84
86							2.4	2.0				86
组合 Code	121111	211111	222100	122111	221111	222200	122220	222111	222210	122221	222211	组合 Code
倍率 n	1	1	1	1	1	1	1	1	1	1	1	倍率 n




起重性能表
Rated lifting load table

T 53.1~74.2 m

53.1-74.2 m 6.5 m 30 m 9.4×9.6 m 360° 153 t 														
m 53.1 53.1 53.1 58.4 58.4 58.4 63.6 63.6 63.6 68.9 68.9 74.2 74.2 m														
6.5m														
40°														
30 m														
32	5.6	5.6	5.6											32
34	5.4	5.4	5.4	5.5	5.5	5.5								34
36	5.3	5.4	5.3	5.4	5.4	5.4	5.5	5.5	5.5					36
38	5.2	5.2	5.2	5.3	5.3	5.3	5.4	5.4	5.4	5.4	5.4			38
40	5.1	5.1	5.1	5.2	5.2	5.2	5.3	5.3	5.3	5.3	5.3			40
42	5.0	5.0	5.0	5.1	5.1	5.1	5.2	5.2	5.2	5.2	5.2	5.5	5.4	42
44	4.9	4.9	4.9	5.0	5.0	5.0	5.1	5.1	5.1	5.1	5.1	5.4	5.3	44
46	4.8	4.8	4.8	4.9	4.9	5.0	5.0	5.0	5.0	5.1	5.1	5.3	5.2	46
48	4.8	4.8	4.8	4.8	4.8	4.9	5.0	5.0	5.0	5.0	5.0	5.1	5.1	48
50	4.7	4.7	4.7	4.7	4.7	4.8	4.9	4.9	4.9	4.9	4.9	5.1	5.0	50
52	4.6	4.6	4.6	4.7	4.7	4.7	4.8	4.8	4.8	4.9	4.9	4.9	4.8	52
54	4.5	4.5	4.5	4.6	4.6	4.7	4.8	4.8	4.7	4.8	4.8	4.6	4.6	54
56	4.5	4.5	4.5	4.6	4.6	4.5	4.7	4.7	4.7	4.8	4.8	4.3	4.3	56
58	4.4	4.4	4.4	4.5	4.5	4.5	4.6	4.6	4.6	4.7	4.7	3.9	3.8	58
60	4.4	4.4	4.4	4.4	4.4	4.4	4.6	4.6	4.6	4.7	4.7	3.5	3.4	60
62	4.3	4.3	4.3	4.4	4.4	4.4	4.5	4.5	4.5	4.6	4.6	3.1	3.0	62
64	4.3	4.3	4.3	4.4	4.4	4.4	4.5	4.5	4.5	4.6	4.6	3.0	3.0	64
66	4.3	4.3	4.3	4.3	4.3	4.3	4.5	4.4	4.5	4.6	4.5	2.6	2.5	66
68	4.3	4.3	4.3	4.3	4.3	4.3	4.4	4.4	4.4	4.5	4.5	2.3	2.3	68
70	4.2	4.2	4.2	4.3	4.3	4.3	4.4	4.4	4.4	4.5	4.5	2.1	2.1	70
72	4.2	4.2	4.2	4.3	4.3	4.3	4.4	4.4	4.4	4.5	4.5	2.0		72
74				4.3	4.3	4.2	4.4	4.3	4.3	4.5	4.4			74
76				4.3	4.1	3.5	4.4	4.2	3.9	4.5	4.4			76
78							3.9	3.5	3.2	4.3	3.7			78
80							3.3	2.8	2.6	3.7	3.1			80
82										3.1	2.5			82
84										2.5				84
86														86
组合 Code	121111	211111	222100	122111	221111	222200	122220	222111	222210	122221	222211	122222	222221	组合 Code
倍率 n	1	1	1	1	1	1	1	1	1	1	1	1	1	倍率 n

起重性能表
Rated lifting load table

T 53.1~79.5 m

53.1-79.5 m 6.5 m 24 m 9.4×9.6 m 360° 153 t 															
	53.1	53.1	53.1	58.4	58.4	58.4	63.6	63.6	63.6	68.9	68.9	74.2	74.2	79.5	
	6.5m														
	40°														
	24 m														
28	8.1	8.1	8.1	8.3	8.3	8.1									28
30	7.9	7.9	7.9	8.1	8.1	8.1	8.2	8.3	8.2						30
32	7.8	7.8	7.7	7.9	7.9	8.0	8.0	8.1	8.0	8.2	8.2				32
34	7.6	7.6	7.7	7.7	7.7	7.8	7.8	7.9	7.8	8.0	8.0				34
36	7.4	7.4	7.5	7.6	7.6	7.6	7.7	7.7	7.7	7.8	7.8	8.2	8.1		36
38	7.4	7.4	7.3	7.5	7.5	7.5	7.5	7.6	7.5	7.7	7.6	8.0	7.9	5.2	38
40	7.2	7.2	7.2	7.4	7.4	7.4	7.5	7.5	7.5	7.6	7.6	7.9	7.7	5.1	40
42	7.1	7.1	7.1	7.2	7.2	7.2	7.3	7.4	7.3	7.5	7.4	7.6	7.5	4.9	42
44	7.0	7.0	6.9	7.1	7.1	7.1	7.3	7.3	7.3	7.4	7.4	7.6	7.3	4.7	44
46	6.9	6.9	6.9	7.0	7.0	7.0	7.1	7.2	7.1	7.3	7.3	7.3	7.1	4.5	46
48	6.8	6.8	6.7	6.9	6.9	6.9	7.1	7.1	7.1	7.3	7.2	7.2	7.0	4.3	48
50	6.7	6.7	6.7	6.9	6.9	6.9	6.9	7.0	6.9	7.2	7.2	7.0	6.8	4.0	50
52	6.7	6.7	6.6	6.8	6.8	6.8	6.9	6.9	6.9	7.1	7.0	6.7	6.6	3.7	52
54	6.5	6.5	6.6	6.7	6.7	6.7	6.9	6.9	6.8	7.0	7.0	6.5	6.4	3.4	54
56	6.5	6.5	6.5	6.7	6.6	6.7	6.7	6.8	6.8	7.0	7.0	6.4	6.3	3.1	56
58	6.5	6.5	6.5	6.6	6.6	6.6	6.7	6.7	6.6	6.9	6.8	6.2	6.1	2.8	58
60	6.4	6.4	6.4	6.5	6.4	6.5	6.7	6.7	6.6	6.8	6.8	6.1	5.9	2.7	60
62	6.4	6.4	6.4	6.5	6.4	6.5	6.6	6.7	6.6	6.8	6.8	6.0	5.8	2.4	62
64	6.4	6.4	6.4	6.4	6.4	6.4	6.6	6.6	6.6	6.8	6.8	5.9	5.7	2.0	64
66	6.4	6.4	5.7	6.4	6.4	6.1	6.6	6.6	6.5	6.7	6.7	5.7	5.6	2.0	66
68				6.3	5.9	5.2	6.4	6.0	5.7	6.7	6.2	5.6	5.3		68
70				5.5	5.1	4.4	5.6	5.2	4.9	6.1	5.4	5.1	4.5		70
72							4.9	4.4	4.1	5.3	4.6	5.0	4.3		72
74							4.2	3.7	3.4	4.6	3.9	4.3	3.6		74
76										4.0	3.3	3.6	3.0		76
78										3.3	2.6	2.8	2.3		78
80												2.1	2.3		80
82															82
组合 Code	121111	211111	222100	122111	221111	222200	122220	222111	222210	122221	222211	122222	222221	222222	组合 Code
倍率 n	1	1	1	1	1	1	1	1	1	1	1	1	1	1	倍率 n





起重性能表
Rated lifting load table

T 53.1~79.5 m

	53.1-79.5 m 6.5 m 18 m 9.4×9.6 m 360° 153 t SL														
	53.1	53.1	53.1	58.4	58.4	58.4	63.6	63.6	63.6	68.9	68.9	74.2	74.2	79.5	
	6.5m														
	40°														
	18 m														
22	11.1	11.1	11.1												22
24	11.0	11.0	11.0	11.0	11.0	11.0									24
26	10.9	10.9	10.9	10.9	10.9	10.9	11.0	11.0	11.0						26
28	10.8	10.8	10.8	10.8	10.8	10.8	11.0	10.9	11.0	11.1	11.0				28
30	10.8	10.8	10.8	10.7	10.7	10.6	10.9	10.8	10.9	10.9	11.0	11.4	11.2		30
32	10.6	10.8	10.6	10.7	10.7	10.5	10.8	10.8	10.8	10.8	10.9	11.3	11.1	7.5	32
34	10.6	10.6	10.4	10.7	10.7	10.3	10.8	10.8	10.8	10.8	10.8	10.9	10.7	7.3	34
36	10.4	10.4	10.4	10.5	10.5	10.3	10.7	10.7	10.7	10.8	10.8	10.6	10.5	7.0	36
38	10.2	10.2	10.2	10.3	10.3	10.1	10.5	10.6	10.5	10.8	10.8	10.3	10.2	6.7	38
40	10.0	10.0	10.0	10.1	10.1	9.9	10.4	10.4	10.4	10.6	10.6	9.9	9.9	6.5	40
42	9.8	9.8	9.8	10.1	10.1	9.9	10.3	10.3	10.3	10.6	10.6	9.6	9.7	6.3	42
44	9.8	9.8	9.8	9.9	9.9	9.8	10.1	10.2	10.1	10.6	10.4	9.3	9.2	6.1	44
46	9.6	9.6	9.6	9.9	9.9	9.8	10.0	10.1	10.0	10.4	10.4	9.0	9.0	5.8	46
48	9.6	9.6	9.6	9.7	9.7	9.7	9.9	10.0	9.9	10.4	10.2	8.9	8.7	5.6	48
50	9.4	9.4	9.4	9.7	9.7	9.7	9.8	9.9	9.8	9.9	9.9	8.6	8.5	5.4	50
52	9.4	9.4	9.4	9.5	9.5	9.6	9.8	9.8	9.8	9.7	9.5	8.5	8.3	5.3	52
54	9.4	9.4	9.4	9.5	9.5	9.5	9.7	9.7	9.7	8.1	8.1	8.4	8.1	5.1	54
56	9.4	9.4	9.2	9.5	9.5	9.5	9.6	9.7	9.6	7.8	7.7	8.0	7.7	4.9	56
58	9.2	9.2	8.1	9.5	9.2	8.5	9.6	9.3	9.0	7.7	7.3	7.9	7.7	4.7	58
60	8.5	8.2	7.0	8.6	8.2	7.4	8.7	8.2	7.9	7.5	6.9	7.6	7.0	4.5	60
62				7.7	7.2	6.4	7.8	7.3	7.0	7.2	6.5	7.0	6.3	4.4	62
64				6.7	6.2	5.5	6.9	6.4	6.1	6.9	6.2	6.3	5.6	4.3	64
66							6.0	5.5	5.2	6.5	5.8	5.6	4.9	4.2	66
68							5.2	4.7	4.4	5.7	5.0	4.9	4.2	4.0	68
70										5.0	4.2	4.1	3.5	3.9	70
72										4.3	3.5	3.8	3.2	3.4	72
74												3.2	2.5	2.7	74
76												3.2	2.3	2.3	76
78														2.0	78
80															80
组合 Code	121111	211111	222100	122111	221111	222200	122220	222111	222210	122221	222211	122222	222221	222222	组合 Code
倍率 n	1	1	1	1	1	1	1	1	1	1	1	1	1	1	倍率 n




起重性能表
Rated lifting load table

T 53.1~79.5 m

																									
	53.1		53.1	53.1	58.4	58.4	58.4	63.6	63.6	63.6	68.9	68.9	74.2	74.2	79.5										
	6.5m																								
	40°																								
12 m																									
18	19.2	19.2	19.2	19.2	19.2	19.3										18									
20	18.8	18.8	18.8	18.9	18.8	18.9	18.4	18.7	18.7							20									
22	18.4	18.4	18.4	18.5	18.4	18.5	18.2	18.3	18.3	17.9	18.2					22									
24	18.0	18.0	18.0	18.1	18.1	18.1	17.9	17.9	17.9	17.6	17.8	17.4	17.0			24									
26	17.6	17.6	17.7	17.7	17.7	17.7	17.5	17.5	17.6	17.6	17.4	16.8	16.5			26									
28	17.2	17.2	17.3	17.3	17.3	17.3	17.3	17.2	17.3	17.2	17.2	15.9	16.0	12.3		28									
30	16.9	16.9	16.9	16.9	16.9	16.9	17.1	16.9	17.0	16.8	16.9	15.2	15.5	11.3		30									
32	16.8	16.8	16.9	16.9	16.9	16.9	16.7	16.8	16.8	16.8	16.9	15.0	15.0	10.9		32									
34	16.4	16.4	16.5	16.5	16.5	16.5	16.5	16.6	16.6	16.4	16.5	14.5	14.7	10.5		34									
36	16.1	16.1	16.1	16.1	16.3	16.3	16.3	16.3	16.3	16.2	16.2	14.1	14.2	10.1		36									
38	16.0	16.0	16.1	16.1	16.1	15.9	16.1	16.1	16.1	15.4	15.4	13.5	13.7	9.7		38									
40	15.7	15.7	15.7	15.7	15.7	15.9	15.7	15.6	15.6	14.7	14.8	13.0	13.0	9.1		40									
42	15.7	15.7	15.7	15.4	15.4	15.4	14.9	14.9	14.9	14.2	14.1	12.0	12.3	8.7		42									
44	15.5	15.5	15.2	14.9	15.1	14.6	14.2	14.2	14.2	13.3	13.5	11.4	11.6	8.5		44									
46	15.2	15.2	13.6	13.7	13.0	13.0	13.2	12.5	12.5	12.6	11.9	10.8	11.1	8.2		46									
48	14.2	13.6	12.6	13.2	12.8	12.4	12.7	12.3	12.0	12.0	11.3	10.5	10.5	7.9		48									
50	12.8	12.5	11.1	11.4	10.7	10.3	10.6	9.9	9.9	10.0	9.4	10.3	9.8	7.7		50									
52	11.4	11.1	9.7	10.9	10.4	9.6	9.7	9.7	9.4	9.6	8.9	9.0	8.4	7.4		52									
54	10.2	9.9	8.5	10.3	9.8	9.0	9.6	9.2	8.9	9.1	8.4	8.5	8.4	7.2		54									
56				9.2	8.6	7.8	9.2	8.7	8.3	8.4	7.9	7.7	7.0	7.0		56									
58				8.1	7.5	6.7	8.3	7.7	7.4	8.3	7.5	7.0	6.3	6.8		58									
60							7.3	6.7	6.4	7.7	6.9	6.3	5.6	6.3		60									
62							6.3	5.8	5.4	6.8	6.0	6.0	5.6	5.6		62									
64										6.0	5.2	5.7	4.9	4.9		64									
66										4.8	4.0	4.9	4.2	4.2		66									
68												4.3	3.5	3.9		68									
70												4.0	3.4	3.3		70									
72														2.7		72									
74														2.6		74									
76																76									
组合 Code	121111	211111	222100	122111	221111	222200	122220	222111	222210	122221	222211	122222	222221	222222		组合 Code									
倍率 n	2	2	2	2	2	2	2	2	2	2	2	2	2	1		倍率 n									

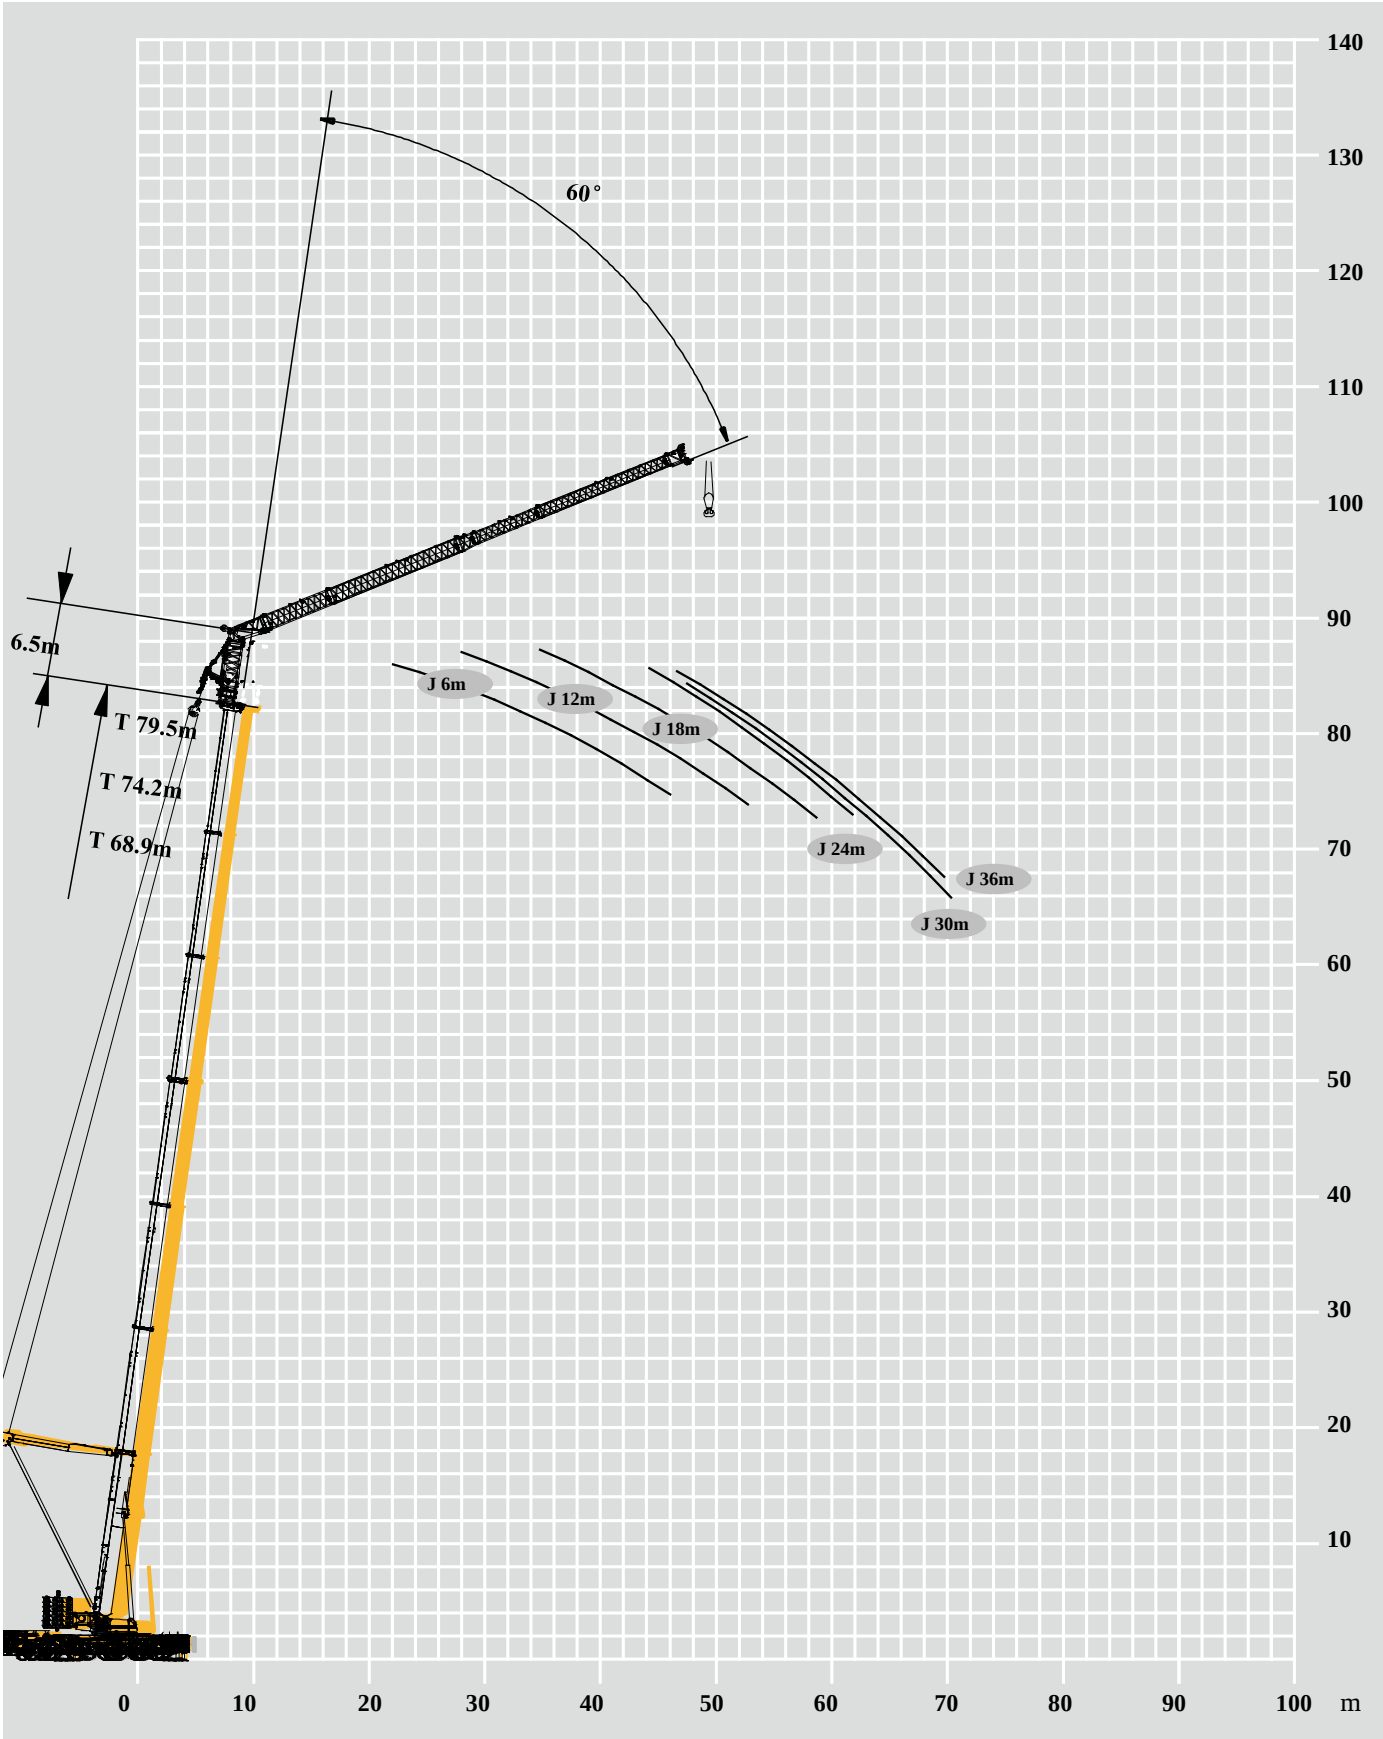
起重性能表
Rated lifting load table

T 16.1~79.5 m

53.1-79.5 m 6.5 m 6 m 9.4×9.6 m 360° 153 t 															
 m	53.1	53.1	53.1	58.4	58.4	58.4	63.6	63.6	63.6	68.9	68.9	74.2	74.2	79.5	 m
	6.5m														
	40°														
	6 m														
12	25.7	25.7	25.7												12
14	25.3	25.3	25.4	25.0	25.3	25.0									14
16	24.8	24.7	24.8	24.6	24.6	24.6	24.4	24.4	24.4						16
18	24.0	24.1	24.1	24.2	24.1	24.2	24.1	24.0	24.1	23.8	23.8	23.3	23.7		18
20	23.5	23.8	23.5	23.5	23.5	23.5	23.4	23.7	23.4	23.4	23.4	22.9	23.3		20
22	23.2	23.2	23.3	23.1	23.1	23.1	22.9	23.0	23.2	23.0	23.0	22.6	22.9	19.0	22
24	22.6	22.6	22.6	22.7	22.7	22.7	22.8	22.8	22.7	22.7	22.6	22.2	22.6	17.5	24
26	22.2	22.2	22.2	22.3	22.3	22.3	22.5	22.5	22.4	22.3	22.3	21.5	21.6	16.7	26
28	21.9	21.9	21.9	21.9	21.9	21.9	22.2	22.1	22.2	21.9	22.0	20.2	20.2	16.0	28
30	21.8	21.8	21.9	21.9	21.9	21.6	21.8	21.7	21.8	21.0	21.3	19.0	19.1	15.3	30
32	21.5	21.5	21.5	21.5	21.5	21.5	21.3	21.3	21.3	20.2	20.2	18.0	18.1	14.8	32
34	21.3	21.3	21.3	20.8	20.8	20.8	20.1	20.1	20.1	19.2	19.2	16.9	17.0	14.3	34
36	21.0	21.0	20.6	19.6	19.6	19.1	19.4	19.0	19.0	18.6	18.3	16.0	16.0	13.8	36
38	19.9	19.9	18.3	19.2	18.5	17.7	18.8	18.1	18.1	18.0	17.3	15.9	15.2	13.2	38
40	17.4	17.4	15.9	16.9	16.1	15.4	16.4	15.7	15.7	15.7	15.0	14.6	14.0	12.8	40
42	16.4	16.4	14.9	15.9	15.2	14.4	15.7	14.9	14.9	15.0	14.3	13.2	12.6	12.3	42
44	14.7	14.6	13.1	14.6	13.9	13.1	14.4	13.6	13.6	13.7	13.0	12.5	11.9	11.7	44
46	12.7	12.5	11.0	12.8	12.6	11.7	12.5	12.4	11.7	12.6	11.9	11.1	10.5	11.1	46
48	10.7	10.4	9.0	11.9	11.4	10.5	12.2	11.6	11.3	12.0	11.2	11.1	9.8	9.8	48
50				10.6	10.1	9.2	11.2	10.6	10.2	11.6	10.6	9.0	8.4	9.1	50
52				9.4	8.8	7.9	10.0	9.4	9.0	10.4	9.7	8.5	7.7	8.4	52
54							8.8	8.2	7.8	9.5	8.6	7.8	7.0	7.7	54
56							7.8	7.1	6.7	8.4	7.5	7.1	6.3	7.0	56
58										7.5	6.5	6.4	5.6	6.3	58
60										6.5	5.6	5.7	4.9	5.6	60
62												5.0	4.2	4.9	62
64												4.9	4.0	4.2	64
66														3.5	66
68														3.3	68
70															70
72															72
组合 Code	121111	211111	222100	122111	221111	222200	122220	222111	222210	122221	222211	122222	222221	222222	组合 Code
倍率 n	2	2	2	2	2	2	2	2	2	2	2	2	2	2	倍率 n

起升高度曲线图
Lifting height chart

主臂+超起+副臂
Boom+ Super lifting device + Jib



起重性能表
Rated lifting load table

T 53.1~68.9 m

	53.1	53.1	53.1	58.4	58.4	58.4	63.6	63.6	63.6	68.9	68.9	
	6.5m											
	60°											
	36 m											
44	3.5	3.5	3.5	3.5	3.5	3.5						44
46	3.4	3.4	3.4	3.4	3.4	3.4	3.5	3.5	3.5			46
48	3.4	3.4	3.4	3.4	3.4	3.4	3.5	3.5	3.5	3.6	3.5	48
50	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.6	3.5	50
52	3.4	3.4	3.3	3.4	3.4	3.4	3.4	3.4	3.4	3.5	3.5	52
54	3.3	3.3	3.3	3.4	3.4	3.4	3.4	3.4	3.4	3.5	3.4	54
56	3.3	3.3	3.3	3.3	3.3	3.3	3.4	3.4	3.4	3.5	3.4	56
58	3.3	3.3	3.3	3.3	3.3	3.3	3.4	3.4	3.4	3.5	3.4	58
60	3.3	3.3	3.3	3.3	3.3	3.3	3.4	3.4	3.4	3.5	3.4	60
62	3.3	3.3	3.3	3.3	3.3	3.3	3.4	3.4	3.4	3.5	3.4	62
64				3.3	3.3	3.3	3.4	3.4	3.4	3.5	3.4	64
66				3.3	3.3	3.3	3.4	3.4	3.4	3.5	3.4	66
68							3.4	3.4	3.4	3.5	3.4	68
70										3.4	3.4	70
72												72
74												74
组合 Code	121111	211111	222100	122111	221111	222200	122220	222111	222210	122221	222211	组合 Code
倍率 n	1	1	1	1	1	1	1	1	1	1	1	倍率 n

起重性能表



Rated lifting load table

T 53.1~74.2 m

53.1-74.2 m 6.5 m 30 m 9.4×9.6 m 360° 153 t SL														
53.1 53.1 53.1 58.4 58.4 58.4 63.6 63.6 63.6 68.9 68.9 74.2 74.2 6.5m 60° 30 m														
38	4.7	4.7	4.7	4.7	4.7	4.7								38
40	4.7	4.7	4.6	4.7	4.7	4.7	4.8	4.7	4.7					40
42	4.6	4.6	4.6	4.6	4.6	4.6	4.7	4.7	4.7	4.8	4.7			42
44	4.6	4.6	4.6	4.6	4.6	4.6	4.7	4.6	4.6	4.7	4.7	5.0	4.9	44
46	4.6	4.5	4.5	4.6	4.6	4.6	4.6	4.6	4.6	4.7	4.7	4.9	4.8	46
48	4.5	4.5	4.5	4.6	4.6	4.5	4.6	4.6	4.6	4.7	4.6	4.9	4.8	48
50	4.5	4.5	4.5	4.5	4.5	4.5	4.6	4.6	4.6	4.6	4.6	4.9	4.8	50
52	4.5	4.5	4.5	4.5	4.5	4.5	4.6	4.6	4.6	4.6	4.6	3.1	4.2	52
54	4.5	4.5	4.5	4.5	4.5	4.5	4.6	4.6	4.6	4.6	4.6	3.1	4.2	54
56	4.5	4.5	4.5	4.5	4.5	4.5	4.6	4.6	4.6	4.6	4.6	3.1	4.2	56
58				4.5	4.5	4.5	4.6	4.6	4.6	4.6	4.6	3.1	3.8	58
60				4.5	4.5	4.5	4.6	4.6	4.6	4.6	4.6	2.4	3.3	60
62							4.6	4.6	4.6	4.6	4.6	2.4	2.8	62
64										4.6	4.6	2.3	2.8	64
66												2.3	2.3	66
68												2.3	2.3	68
70														70
组合 Code	121111	211111	222100	122111	221111	222200	122220	222111	222210	122221	222211	122222	222221	组合 Code
倍率 n	1	1	1	1	1	1	1	1	1	1	1	1	1	倍率 n




起重性能表
Rated lifting load table

T 53.1~79.5 m

53.1-79.5 m 6.5 m 24 m 9.4×9.6 m 360° 153 t 															
	53.1	53.1	53.1	58.4	58.4	58.4	63.6	63.6	63.6	68.9	68.9	74.2	74.2	79.5	
	6.5m														
	60°														
	24 m														
32	7.0	7.0	7.0	7.2	7.2	7.1									32
34	7.0	7.0	7.0	7.0	7.0	7.1	7.3	7.2	7.1						34
36	7.0	7.0	7.0	7.0	7.0	6.9	7.1	7.0	7.0	7.2	7.2				36
38	6.8	6.8	6.8	7.0	7.0	6.9	7.0	7.0	7.0	7.2	7.1	6.8	6.7		38
40	6.8	6.8	6.8	6.9	6.9	6.9	7.0	7.0	7.0	7.1	7.0	5.9	5.8	3.6	40
42	6.8	6.8	6.8	6.9	6.9	6.9	6.9	6.9	6.9	7.1	7.0	5.9	5.8	3.6	42
44	6.8	6.8	6.8	6.9	6.9	6.9	6.9	6.9	6.9	7.1	7.0	5.9	5.8	3.6	44
46	6.8	6.8	6.8	6.9	6.9	6.9	6.9	6.9	6.9	7.0	7.0	5.9	5.8	3.6	46
48	6.8	6.8	6.8	6.9	6.9	6.9	6.9	6.9	6.9	7.0	7.0	5.9	5.8	3.6	48
50	6.8	6.8	6.8	6.9	6.9	6.9	6.9	6.9	6.9	7.0	7.0	5.9	5.8	3.1	50
52				6.9	6.9	6.9	6.9	6.9	6.9	7.0	7.0	5.9	5.8	3.1	52
54				6.9	6.9	6.9	6.9	6.9	6.9	7.0	7.0	5.9	5.8	3.1	54
56							6.9	6.9	6.9	6.9	7.0	5.1	5.0	3.1	56
58										6.9	7.0	5.1	5.0	3.1	58
60												5.1	5.0	2.6	60
62												5.1	5.0		62
64															64
组合 Code	121111	211111	222100	122111	221111	222200	122220	222111	222210	122221	222211	122222	222221	222222	组合 Code
倍率 n	1	1	1	1	1	1	1	1	1	1	1	1	1	1	倍率 n




起重性能表
Rated lifting load table

T 53.1~79.5 m

53.1-79.5 m 6.5 m 18 m 9.4×9.6 m 360° 153 t 															
	53.1	53.1	53.1	58.4	58.4	58.4	63.6	63.6	63.6	68.9	68.9	74.2	74.2	79.5	
	6.5m														
	60°														
	18 m														
26	10.3	10.4	10.3												26
28	10.2	10.3	10.2	10.4	10.4	10.4	10.4	10.4	10.4						28
30	10.2	10.2	10.1	10.2	10.2	10.2	10.4	10.4	10.4	10.6	10.6				30
32	10.1	10.1	10.0	10.2	10.2	10.2	10.2	10.2	10.2	10.5	10.5	9.3	9.7		32
34	10.0	10.0	10.0	10.2	10.2	10.0	10.2	10.2	10.2	10.4	10.4	9.2	9.7	6.7	34
36	10.0	10.0	10.0	10.0	10.0	10.0	10.2	10.2	10.2	10.4	10.4	9.1	9.7	6.7	36
38	10.0	10.0	10.0	10.0	10.0	10.0	10.2	10.2	10.2	10.4	10.3	9.1	9.6	6.7	38
40	10.0	10.0	10.0	10.0	10.0	10.0	10.2	10.2	10.2	10.4	10.2	9.1	9.5	6.7	40
42	10.0	10.0	10.0	10.0	10.0	10.0	10.2	10.2	10.2	10.4	10.0	9.1	9.5	6.6	42
44	10.0	10.0	10.0	10.0	10.0	10.0	10.2	10.2	10.2	10.4	10.0	9.0	8.4	5.7	44
46				10.0	10.0	10.0	10.2	10.2	10.2	10.3	10.0	9.0	8.4	5.7	46
48				9.9	10.0	10.0	10.2	10.2	10.2	10.3	10.0	9.0	8.4	5.6	48
50							10.2	10.2	10.2	10.3	10.0	9.0	8.0	5.5	50
52										10.3	9.9	9.0	8.0	5.5	52
54												9.0	7.9	5.4	54
56												8.9	7.9	5.3	56
58														5.2	58
60															60
62															62
组合 Code	121111	211111	222100	122111	221111	222200	122220	222111	222210	122221	222211	122222	222221	222222	组合 Code
倍率 n	1	1	1	1	1	1	1	1	1	1	1	1	1	1	倍率 n

起重性能表
Rated lifting load table

T 53.1~79.5 m

53.1-79.5 m 6.5 m 12 m 9.4×9.6 m 360° 153 t 50 m															
	53.1	53.1	53.1	58.4	58.4	58.4	63.6	63.6	63.6	68.9	68.9	74.2	74.2	79.5	
	6.5m														
	60°														
	12 m														
20	15.9	15.9	15.9												20
22	15.8	15.8	15.8	12.4	12.4	12.4	12.5	12.4	12.5						22
24	15.7	15.7	15.7	12.4	12.4	12.4	12.3	12.3	12.3	12.3	12.3				24
26	15.5	15.5	15.5	12.3	12.3	12.3	12.3	12.3	12.3	12.3	12.2	12.2	12.1	12.1	26
28	15.3	15.3	15.3	12.3	12.3	12.3	12.2	12.1	12.2	12.1	12.1	12.1	12.1	10.6	28
30	15.3	15.3	15.3	12.1	12.1	12.1	12.1	12.1	12.1	12.1	12.0	12.0	12.0	10.4	30
32	15.3	15.3	15.3	12.1	12.1	12.1	12.0	12.0	12.0	12.0	11.9	11.9	11.9	10.3	32
34	15.3	15.3	15.3	12.1	12.1	12.1	12.0	12.0	12.0	12.0	11.9	11.9	11.9	10.1	34
36	15.3	15.3	15.3	12.1	12.1	12.1	12.0	12.0	12.0	12.0	11.9	11.9	11.9	9.6	36
38	15.3	15.3	15.3	12.1	12.1	12.0	12.0	12.0	12.0	12.0	11.9	11.9	11.9	9.5	38
40				12.0	12.0	12.0	12.0	12.0	12.0	12.0	11.9	11.9	11.9	8.9	40
42				12.0	12.0	12.0	12.0	12.0	12.0	12.0	11.8	11.8	11.9	8.5	42
44							12.0	12.0	12.0	12.0	11.8	11.8	11.9	8.2	44
46											11.8	11.8	11.9	7.9	46
48													11.5	7.6	48
50													10.9	7.4	50
52														7.1	52
54															54
56															56
组合 Code	121111	211111	222100	122111	221111	222200	122220	222111	222210	122221	222211	122222	222221	222222	组合 Code
倍率 n	2	2	2	1	1	1	1	1	1	1	1	1	1	1	倍率 n

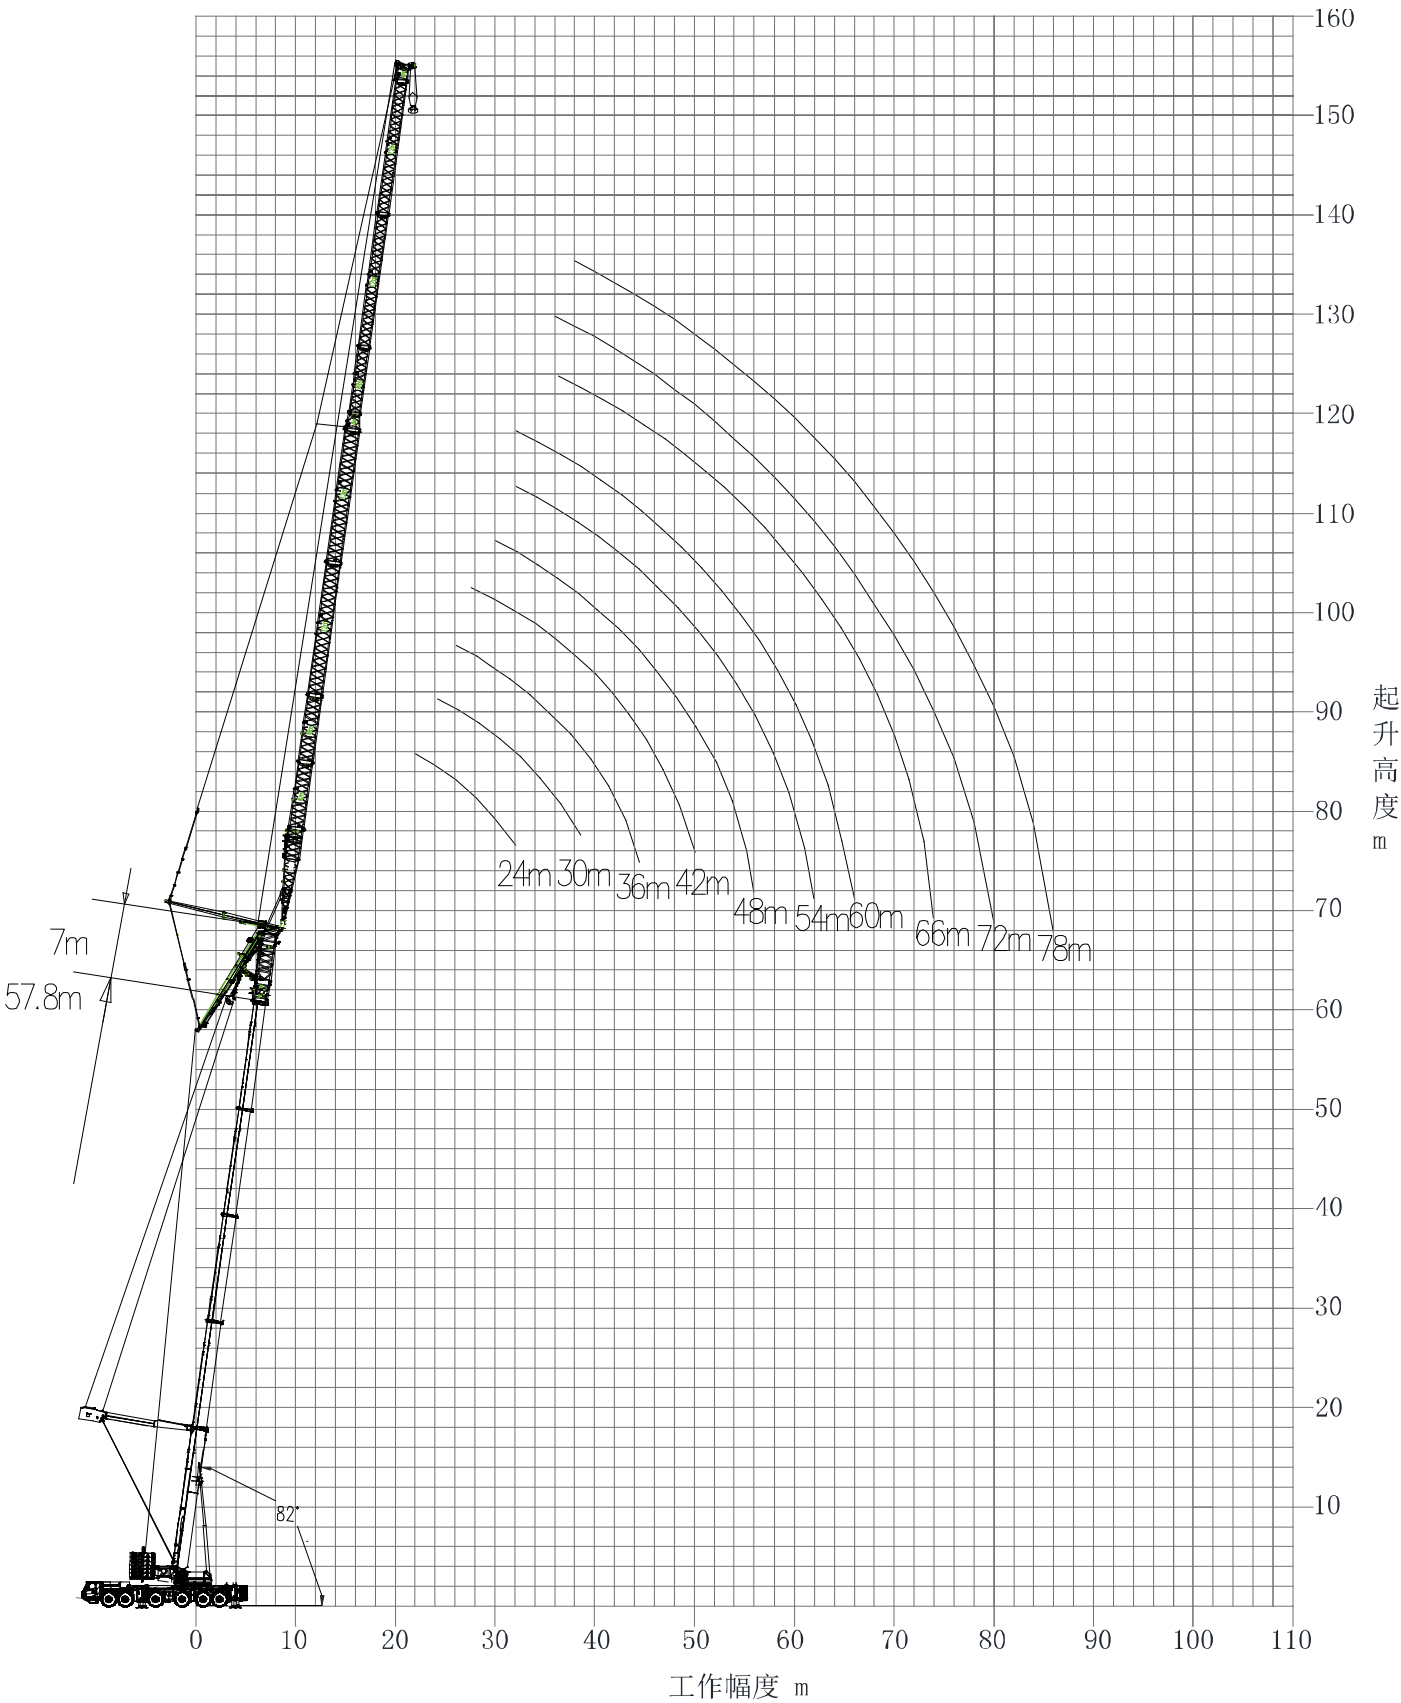
起重性能表
Rated lifting load table

T 53.1~79.5 m

53.1-79.5 m 6.5 m 6 m 9.4×9.6 m 360° 153 t 50 m															
 m	53.1	53.1	53.1	58.4	58.4	58.4	63.6	63.6	63.6	68.9	68.9	74.2	74.2	79.5	 m
	6.5m														
	60°														
	6 m														
14	17.3	16.9	17.3												14
16	17.0	16.9	17.0	16.9	16.9	16.9	16.9	16.8	16.9						16
18	16.8	16.8	16.8	16.8	16.8	16.8	16.6	16.6	16.6	16.3	16.3				18
20	16.7	16.6	16.7	16.6	16.6	16.6	16.6	16.6	16.6	16.3	16.3	16.2	16.2		20
22	16.5	16.6	16.5	16.5	16.5	16.5	16.3	16.3	16.3	16.3	16.3	16.0	16.0	16.0	22
24	16.5	16.6	16.5	16.2	16.2	16.2	16.2	16.2	16.2	16.1	16.1	16.0	16.0	16.0	24
26	16.5	16.5	16.5	16.2	16.2	16.2	16.2	16.2	16.2	16.0	16.0	16.0	16.0	15.9	26
28	16.5	16.3	16.5	16.2	16.2	16.2	16.2	16.2	16.2	16.0	16.0	16.0	16.0	15.7	28
30	16.5	16.3	16.5	16.2	16.2	16.2	16.0	16.2	16.0	16.0	16.0	15.7	16.0	15.7	30
32	16.5	16.3	16.5	16.2	16.2	16.2	15.9	16.0	15.9	16.0	16.0	15.6	15.7	15.7	32
34				16.2	16.2	16.2	15.9	15.9	15.9	16.0	16.0	15.6	15.6	15.7	34
36				16.2	16.2	16.2	15.9	15.9	15.9	16.0	16.0	15.6	15.6	15.7	36
38							15.2	15.4	15.4	16.0	15.4	15.6	15.6	15.7	38
40										14.7	14.1	14.7	14.1	14.7	40
42												13.4	12.8	13.4	42
44												12.8	12.2	12.2	44
46														11.5	46
48															48
50															50
组合 Code	121111	211111	222100	122111	221111	222200	122220	222111	222210	122221	222211	122222	222221	222222	组合 Code
倍率 n	2	2	2	2	2	2	2	2	2	2	2	2	2	2	倍率 n



起升高度曲线图
Lifting height chart


主臂+超起+变幅副臂
Boom+ Super lifting device + Luffing jib



起重性能表
Lifting capacities






T 31.4~57.8m






 m  m							
 31.4-57.8 m T  7 m  24m  9.4×9.6m  360°  153 t  82°  SL							
24m							
	31.4+7	36.7+7	42+7	47.3+7	52.6+7	57.8+7	
14	70.0						14
16	64.6	64.0	60.7				16
18	59.2	58.4	57.6	56.0			18
20	54.4	53.6	52.8	52.0	46.7		20
22	50.4	49.6	48.8	48.0	45.1	41.6	22
24	46.4	46.4	45.6	44.8	43.1	39.2	24
26	43.2	43.2	42.4	41.6	40.3	37.5	26
28	40.8	39.0	40.0	39.2	38.4	35.2	28
30			37.6	36.8	36.0	33.4	30
32						30.6	32
组合 Code	1110	1111	2111	2211	2221	2222	组合 Code
倍率	6	5	5	5	4	4	倍率
Parts of line							Parts of line

 m  m							
 31.4-57.8 m T  7 m  30m  9.4×9.6m  360°  153 t  82°  SL							
30m							
	31.4+7	36.7+7	42+7	47.3+7	52.6+7	57.8+7	
16	57.4						16
18	54.2	51.0	50.6				18
20	51.0	49.4	49.1	47.8			20
22	48.3	47.9	47.6	46.3	43.2		22
24	45.6	45.6	44.8	44.0	41.6	38.9	24
26	42.9	42.4	41.6	40.8	40.1	36.5	26
28	36.5	38.5	39.2	38.4	37.6	34.5	28
30	34.1	36.1	36.8	36.0	36.0	32.9	30
32	32.5	33.1	34.4	34.4	33.6	30.1	32
34	28.9	31.5	32.0	31.2	31.2	28.1	34
36			27.9	29.6	29.5	27.3	36
38						26.5	38
组合 Code	1110	1111	2111	2211	2221	2222	组合 Code
倍率	6	5	5	5	4	4	倍率
Parts of line							Parts of line

起重性能表
Lifting capacities






T 31.4~57.8m








31.4-57.8m T 7m 36m 9.4×9.6m 360° 153t 82° 							
36m							
	31.4+7	36.7+7	42+7	47.3+7	52.6+7	57.8+7	
18	49.0						18
20	46.6	44.4	44.5				20
22	44.2	42.8	43.0	42.4			22
24	41.7	41.3	41.4	40.8	39.5		24
26	38.6	39.7	39.9	39.3	37.9	35.3	26
28	36.2	37.3	38.3	37.6	36.4	33.8	28
30	32.1	34.8	36.0	36.0	34.8	31.7	30
32	26.5	32.2	33.7	33.6	32.0	27.9	32
34	24.9	27.0	29.1	31.2	29.5	26.5	34
36	23.6	25.3	26.6	28.1	28.5	25.7	36
38	22.8	23.8	24.9	26.4	26.9	24.9	38
40	22.4	22.9	23.2	24.6	26.4	24.1	40
42			22.2	23.3	24.7	23.2	42
44						22.8	44
组合 Code	1110	1111	2111	2211	2221	2222	组合 Code
倍率	4	4	4	4	3	3	倍率
Parts of line							Parts of line

31.4-57.8m T 7m 42m 9.4×9.6m 360° 153t 82° 							
42m							
	31.4+7	36.7+7	42+7	47.3+7	52.6+7	57.8+7	
20	40.1						20
22	40.1	37.8	37.2				22
24	36.8	36.7	36.9				24
26	33.2	35.2	35.6	36.3	28.5		26
28	28.7	32.9	33.6	33.6	27.7	25.4	28
30	26.5	27.5	29.8	27.7	27.0	25.4	30
32	24.9	25.9	26.8	26.9	26.2	25.4	32
34	23.2	24.2	25.1	26.0	25.4	24.3	34
36	21.6	22.5	23.5	24.3	24.6	23.8	36
38	20.2	20.9	21.8	22.6	23.8	23.3	38
40	19.1	19.3	20.1	20.9	22.5	22.5	40
42	17.8	18.5	19.1	19.5	20.8	22.2	42
44	16.9	17.5	18.2	18.6	19.6	21.1	44
46	16.0	16.4	16.5	17.8	18.8	19.1	46
48			15.8	16.9	17.0	18.1	48
50						17.2	50
组合 Code	1110	1111	2111	2211	2221	2222	组合 Code
倍率	4	3	3	3	3	2	倍率
Parts of line							Parts of line

起重性能表
Lifting capacities




T 31.4~57.8m

           							
48m							
	31.4+7	36.7+7	42+7	47.3+7	52.6+7	57.8+7	
22	26.6	26.8					22
24	25.8	26.0	25.8				24
26	25.0	25.2	25.0	24.7			26
28	24.3	24.4	24.2	24.3	24.8		28
30	23.8	23.7	24.1	23.9	24.1	23.7	30
32	23.2	23.7	23.5	23.6	23.3	23.0	32
34	23.0	22.9	23.3	23.1	22.5	22.3	34
36	22.4	22.9	22.7	22.5	22.3	21.6	36
38	22.0	22.1	22.2	22.3	21.8	20.9	38
40	20.4	21.3	21.5	21.7	21.0	20.1	40
42	19.0	21.2	21.3	21.5	20.7	20.0	42
44	18.1	19.5	20.7	20.8	20.7	19.3	44
46	17.3	18.1	19.2	20.0	20.0	18.6	46
48	16.8	17.9	18.9	19.2	19.2	18.1	48
50	16.4	17.1	17.4	18.4	18.4	17.6	50
52	16.0	16.5	17.3	17.6	16.8	16.8	52
54			16.5	16.8	16.8	16.0	54
56						15.2	56
组合 Code	1110	1111	2111	2211	2221	2222	组合 Code
倍率	2	2	2	2	2	2	倍率
Parts of line							Parts of line





           							
54m							
	31.4+7	36.7+7	42+7	47.3+7	52.6+7	57.8+7	
24	21.8	22.2					24
26	21.6	21.8	21.7				26
28	21.4	21.4	21.3	20.7			28
30	21.2	21.0	21.0	20.6	20.9		30
32	20.5	20.7	20.6	20.5	20.5	19.8	32
34	20.1	20.3	20.2	20.4	20.1	19.4	34
36	19.7	19.9	19.8	20.0	19.8	19.0	36
38	19.4	19.5	19.7	19.6	19.2	18.6	38
40	19.3	19.1	19.1	19.3	18.8	17.9	40
42	18.6	19.1	18.9	18.9	18.6	17.7	42
44	18.3	18.3	18.6	18.8	18.4	17.5	44
46	17.0	18.3	18.2	18.1	18.0	17.1	46
48	16.6	17.4	18.1	18.1	17.6	16.9	48
50	15.4	16.6	17.5	17.7	17.6	16.4	50
52	15.1	15.7	16.6	17.6	16.8	15.8	52
54	14.2	15.1	15.8	16.7	16.0	15.7	54
56	13.8	14.8	14.9	15.8	16.0	15.2	56
58	13.8	14.3	14.8	15.2	15.2	14.4	58
60			14.1	14.4	14.4	14.4	60
62						13.6	62
组合 Code	1110	1111	2111	2211	2221	2222	组合 Code
倍率	2	2	2	2	2	2	倍率
Parts of line							Parts of line

起重性能表
Lifting capacities

T 31.4~57.8m






         							
60m							
	31.4+7	36.7+7	42+7	47.3+7	52.6+7	57.8+7	
24	18.0						24
26	18.0	17.9					26
28	18.0	17.9	17.9	16.8			28
30	17.6	17.5	17.5	16.8	16.6		30
32	17.2	17.1	17.1	16.8	16.6	15.7	32
34	16.9	17.1	16.9	16.8	16.6	15.7	34
36	16.8	16.7	16.6	16.7	16.6	15.7	36
38	16.4	16.3	16.4	16.4	16.3	15.7	38
40	16.1	16.3	16.2	16.1	16.2	15.7	40
42	16.0	15.9	16.0	15.8	16.0	15.7	42
44	15.7	15.5	15.8	15.7	15.8	15.5	44
46	15.6	15.5	15.4	15.4	15.6	15.1	46
48	15.3	15.1	15.2	15.3	15.4	14.9	48
50	15.1	15.1	15.0	15.0	15.2	14.7	50
52	14.5	14.7	14.8	14.9	15.0	14.5	52
54	14.3	14.7	14.8	14.6	14.8	14.3	54
56	13.4	14.7	14.6	14.6	14.6	14.1	56
58	12.9	13.8	14.4	14.4	14.4	13.8	58
60	12.5	13.1	13.8	14.2	13.6	13.6	60
62	12.1	12.9	12.9	13.6	13.6	12.8	62
64	12.1	12.3	12.8	12.8	12.8	12.8	64
66			12.0	12.8	12.0	12.0	66
68						11.2	68
组合 Code 倍率 Parts of line	1110 2	1111 2	2111 2	2211 2	2221 2	2222 2	组合 Code 倍率 Parts of line

31.4-57.8 m T 7 m 66m 9.4×9.6m 360° 153 t 82° SL							
66m							
	31.4+7	36.7+7	42+7	47.3+7	52.6+7	57.8+7	
26	15.1						26
28	15.1	15.0	15.0				28
30	15.1	15.0	15.0	15.1			30
32	14.9	14.8	14.8	15.1	14.0		32
34	14.7	14.6	14.6	14.8	14.0		34
36	14.3	14.4	14.3	14.4	14.0	13.3	36
38	14.1	14.0	14.1	14.0	14.0	13.3	38
40	13.7	14.0	13.9	13.8	13.8	13.3	40
42	13.7	13.6	13.6	13.7	13.6	13.3	42
44	13.3	13.4	13.4	13.5	13.4	13.3	44
46	13.3	13.2	13.2	13.3	13.2	13.1	46
48	12.9	13.0	13.0	13.1	13.0	12.9	48
50	12.9	12.8	12.9	12.9	12.8	12.8	50
52	12.5	12.8	12.7	12.7	12.8	12.6	52
54	12.5	12.4	12.5	12.7	12.5	12.5	54
56	12.5	12.4	12.4	12.3	12.4	12.4	56
58	12.1	12.4	12.3	12.3	12.2	12.1	58
60	12.0	12.0	12.1	12.2	12.2	12.1	60
62	11.3	12.0	11.9	11.9	12.0	12.0	62
64	11.1	12.0	11.9	11.9	12.0	11.7	64
66	10.5	11.2	11.6	11.8	11.7	11.7	66
68	10.5	11.0	11.5	11.7	11.6	11.2	68
70	10.0	10.4	10.7	11.2	11.2	11.2	70
72			9.9	10.9	10.4	10.4	72
74						10.4	74
组合 Code	1110	1111	2111	2211	2221	2222	组合 Code
倍率							倍率
Parts of line	2	2	2	2	2	1	Parts of line

         							
72m							
	31.4+7	36.7+7	42+7	47.3+7	52.6+7	57.8+7	
28	11.2						28
30	11.2	11.1	10.5				30
32	11.2	11.1	10.5	10.2			32
34	11.0	10.9	10.5	10.2	8.7		34
36	10.8	10.8	10.5	10.2	8.7	8.3	36
38	10.7	10.6	10.5	10.2	8.7	8.3	38
40	10.5	10.4	10.4	10.2	8.7	8.3	40
42	10.3	10.3	10.3	10.2	8.6	8.3	42
44	10.1	10.2	10.2	10.1	8.5	8.2	44
46	10.1	10.1	10.1	10.0	8.5	7.9	46
48	10.0	9.9	9.9	9.9	8.4	7.8	48
50	9.8	9.7	9.8	9.7	8.2	7.8	50
52	9.6	9.7	9.6	9.7	8.1	7.8	52
54	9.6	9.4	9.4	9.4	8.0	7.8	54
56	9.3	9.4	9.3	9.4	7.9	7.7	56
58	9.3	9.2	9.2	9.2	7.9	7.7	58
60	9.1	9.2	9.2	9.2	7.8	7.7	60
62	9.1	9.0	9.1	9.0	7.7	7.5	62
64	9.1	9.0	9.0	9.0	7.6	7.5	64
66	8.7	9.0	8.9	8.8	7.6	7.3	66
68	8.6	8.7	8.8	8.8	7.5	7.1	68
70	8.0	8.3	8.3	8.8	7.5	7.0	70
72	7.8	8.0	8.1	8.4	7.3	6.8	72
74	7.3	7.8	7.8	8.0	7.2	6.7	74
76	7.1	7.3	7.4	7.8	6.6	6.7	76
78			7.3	7.3	6.5	6.6	78
80						6.4	80
组合 Code 倍率	1110	1111	2111	2211	2221	2222	组合 Code 倍率
Parts of line	1	1	1	1	1	1	Parts of line

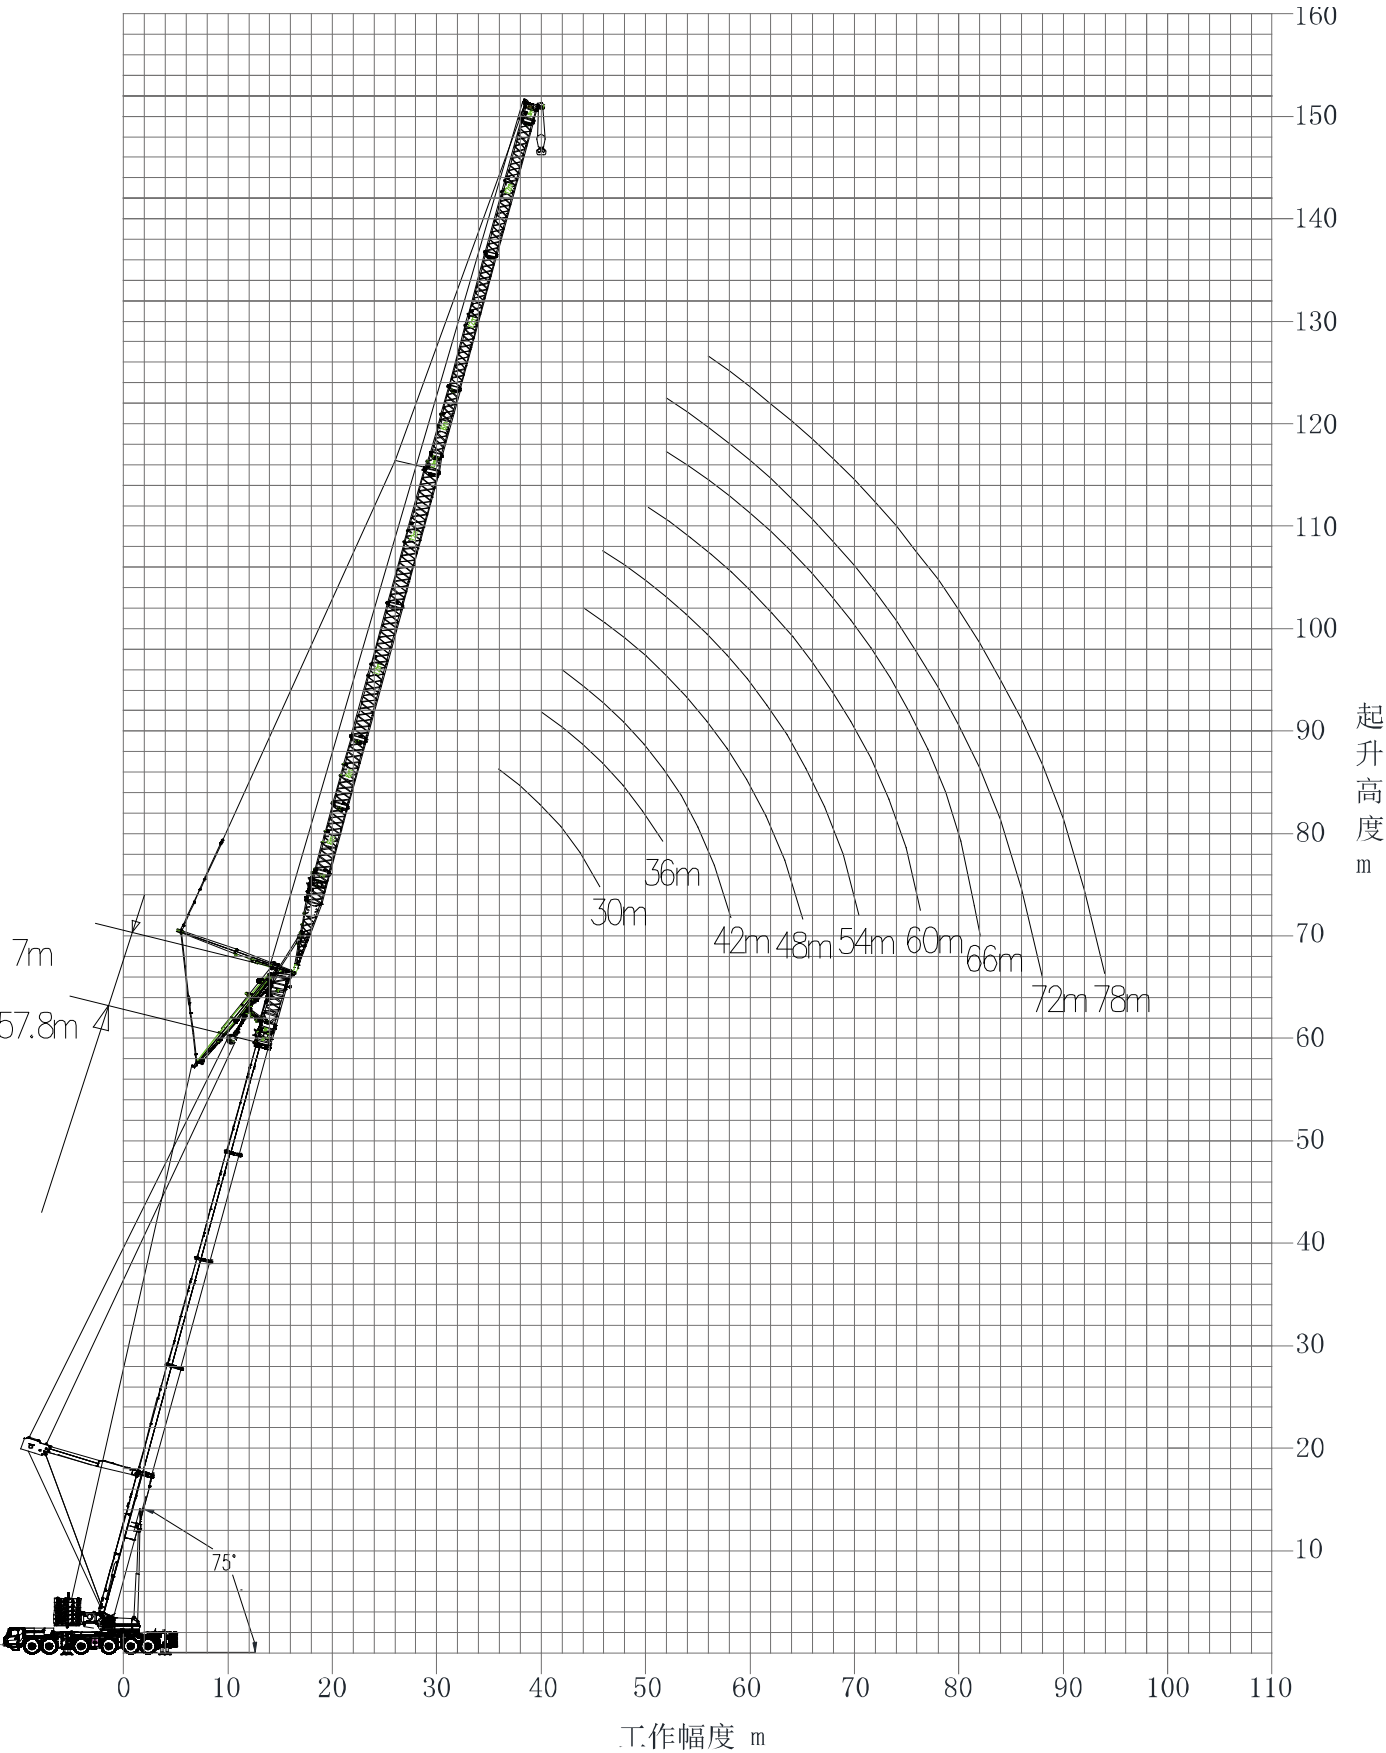
起重性能表
Lifting capacities

T 31.4~57.8m

        							
78m							
	31.4+7	36.7+7	42+7	47.3+7	52.6+7	57.8+7	
30	7.6						30
32	7.6	7.8					32
34	7.6	7.8	6.1	5.9			34
36	7.6	7.7	6.1	5.9	5.8		36
38	7.6	7.5	6.1	5.9	5.8	5.5	38
40	7.5	7.5	6.1	5.9	5.8	5.5	40
42	7.4	7.4	6.1	5.9	5.8	5.5	42
44	7.3	7.3	6.0	5.9	5.8	5.5	44
46	7.2	7.2	5.9	5.9	5.8	5.5	46
48	7.1	7.1	5.9	5.8	5.7	5.5	48
50	7.0	7.0	5.8	5.8	5.7	5.5	50
52	6.9	6.9	5.8	5.7	5.7	5.4	52
54	6.8	6.8	5.7	5.7	5.6	5.4	54
56	6.7	6.7	5.6	5.6	5.5	5.4	56
58	6.7	6.7	5.5	5.5	5.5	5.4	58
60	6.5	6.6	5.5	5.4	5.4	5.4	60
62	6.5	6.5	5.4	5.4	5.4	5.3	62
64	6.4	6.4	5.4	5.4	5.4	5.3	64
66	6.4	6.4	5.3	5.3	5.3	5.2	66
68	6.4	6.3	5.3	5.3	5.3	5.2	68
70	6.2	6.3	5.3	5.2	5.2	5.1	70
72	6.2	6.2	5.2	5.2	5.2	5.1	72
74	6.2	6.2	5.1	5.2	5.2	5.0	74
76	6.2	6.2	5.1	5.2	5.1	4.9	76
78	5.8	5.9	5.1	5.0	5.1	4.8	78
80	5.6	5.8	4.7	5.0	5.1	4.8	80
82	5.3	5.3	4.6	4.8	4.9	4.8	82
84			4.5	4.6	4.8	4.8	84
86						4.5	86
组合 Code	1110	1111	2111	2211	2221	2222	组合 Code
倍率							倍率
Parts of line	1	1	1	1	1	1	Parts of line






起升高度曲线图
Lifting height chart






主臂+超起+变幅副臂
Boom+ Super lifting device + Luffing jib



起重性能表
Lifting capacities



T 31.4~57.8m




31.4-57.8m 7 m 30m 9.4×9.6m 360° 153 t 75° 							
30m							
	31.4+7	36.7+7	42+7	47.3+7	52.6+7	57.8+7	
24	41.6						24
26	39.2	39.2					26
28	36.8	36.0	35.2				28
30	35.2	34.4	32.0				30
32	32.0	31.2	30.4	29.6			32
34	30.4	29.6	28.8	28.0	27.2		34
36	28.8	28.0	27.2	26.4	25.6	23.8	36
38	27.2	27.2	25.6	24.8	24.8	23.0	38
40		25.6	24.8	24.0	23.2	22.2	40
42			23.2	22.4	22.4	21.3	42
44					20.8	20.5	44
46						19.9	46
组合 Code	1110	1111	2111	2211	2221	2222	组合 Code
倍率							倍率
Parts of line	4	3	3	3	3	2	Parts of line

31.4-57.8m 7 m 36m 9.4×9.6m 360° 153 t 75° 							
36m							
	31.4+7	36.7+7	42+7	47.3+7	52.6+7	57.8+7	
26	39.2						26
28	36.8	36.0					28
30	34.4	33.6					30
32	31.2	31.2	29.6				32
34	29.6	29.6	28.0	27.2			34
36	28.0	28.0	26.4	25.6	24.8		36
38	27.2	26.4	25.6	24.8	24.0		38
40	25.6	24.8	24.0	23.2	22.4	21.6	40
42	24.0	24.0	23.2	22.4	21.6	20.5	42
44	22.7	22.4	21.6	21.6	20.8	19.8	44
46		21.6	20.8	20.0	20.0	19.1	46
48			20.0	19.2	19.2	18.4	48
50					18.4	17.6	50
52						16.8	52
组合 Code	1110	1111	2111	2211	2221	2222	组合 Code
倍率							倍率
Parts of line	3	3	3	3	2	2	Parts of line

起重性能表
Lifting capacities




T 31.4~57.8m




 m  m							
 31.4-57.8 m  7 m  42m  9.4×9.6m  360°  153 t  75°  SL							
42m							
	31.4+7	36.7+7	42+7	47.3+7	52.6+7	57.8+7	
30	30.5						30
32	28.9	28.3					32
34	27.3	27.6	27.6				34
36	25.7	26.8	26.4	25.6			36
38	24.0	25.2	24.8	24.0	23.2		38
40	22.3	23.5	24.0	23.2	22.4		40
42	20.4	22.3	22.4	21.6	20.8	20.0	42
44	19.3	20.2	21.6	20.8	20.0	19.2	44
46	18.2	19.1	20.4	20.0	19.2	18.4	46
48	17.2	17.9	19.1	19.2	18.4	17.6	48
50	16.4	17.1	18.1	18.4	17.6	17.2	50
52		16.2	17.0	17.6	16.8	16.5	52
54			16.1	16.8	16.8	16.0	54
56					16.0	15.2	56
58						15.2	58
组合 Code	1110	1111	2111	2211	2221	2222	组合 Code
倍率	3	3	3	2	2	2	倍率
Parts of line							Parts of line

 m  m							
 31.4-57.8 m  7 m  48m  9.4×9.6m  360°  153 t  75°  SL							
48m							
	31.4+7	36.7+7	42+7	47.3+7	52.6+7	57.8+7	
32	24.3						32
34	23.9	24.1					34
36	23.5	23.7	23.2				36
38	23.1	23.2	21.6	20.8			38
40	22.4	21.6	20.8	20.0	19.2		40
42	20.8	20.8	20.0	19.2	18.4		42
44	20.0	19.2	18.4	17.6	17.6	16.8	44
46	19.2	18.4	17.6	16.8	16.8	16.0	46
48	18.4	17.6	16.8	16.0	16.0	15.2	48
50	17.6	16.8	16.0	15.2	15.2	14.4	50
52	16.8	16.0	15.2	14.4	14.4	13.6	52
54	16.0	15.2	14.4	14.4	13.6	12.8	54
56	15.2	14.4	13.6	13.6	12.8	12.8	56
58		13.6	13.6	12.8	12.0	12.0	58
60			12.8	12.0	12.0	11.2	60
62					11.2	11.2	62
64						10.4	64
组合 Code	1110	1111	2111	2211	2221	2222	组合 Code
倍率	2	2	2	2	2	2	倍率
Parts of line							Parts of line

起重性能表
Lifting capacities








T 31.4~57.8m

m         m							
54m							
	31.4+7	36.7+7	42+7	47.3+7	52.6+7	57.8+7	
34	21.1						34
36	20.7	20.9					36
38	20.3	20.5	20.5				38
40	19.9	20.1	20.2	20.0			40
42	19.5	19.7	19.2	18.4			42
44	19.1	19.2	18.4	17.6	16.8		44
46	18.9	18.4	17.6	16.8	16.0	15.5	46
48	17.6	17.6	16.8	16.0	15.2	15.1	48
50	16.8	16.8	16.0	15.2	14.4	14.4	50
52	16.0	16.0	15.2	14.4	14.4	13.6	52
54	15.2	15.2	14.4	13.6	13.6	12.8	54
56	15.2	14.4	13.6	13.6	12.8	12.8	56
58	14.4	13.6	13.6	12.8	12.0	12.0	58
60	13.6	13.6	12.8	12.0	12.0	11.2	60
62	12.8	12.8	12.0	12.0	11.2	11.2	62
64		12.0	12.0	11.2	11.2	10.4	64
66			11.2	10.4	10.4	10.4	66
68					9.6	9.6	68
70						8.8	70
组合 Code	1110	1111	2111	2211	2221	2222	组合 Code
倍率	2	2	2	2	2	2	倍率
Parts of line							Parts of line

m         m							
60m							
	31.4+7	36.7+7	42+7	47.3+7	52.6+7	57.8+7	
36	17.7						36
38	17.3	17.5					38
40	16.9	17.1	16.7				40
42	16.5	16.7	16.5	16.5			42
44	16.3	16.3	16.3	16.3			44
46	16.0	16.0	16.1	16.0	15.9		46
48	15.8	15.8	15.9	15.2	15.2		48
50	15.6	15.6	15.2	14.4	14.4	13.5	50
52	15.4	15.2	14.4	13.6	13.6	12.8	52
54	15.2	14.4	13.6	13.6	12.8	12.0	54
56	14.4	13.6	13.6	12.8	12.0	12.0	56
58	13.6	13.6	12.8	12.0	12.0	11.2	58
60	12.8	12.8	12.0	11.2	11.2	10.4	60
62	12.8	12.0	11.2	11.2	10.4	10.4	62
64	12.0	12.0	11.2	10.4	10.4	9.6	64
66	11.2	11.2	10.4	10.4	9.6	9.6	66
68	11.2	10.4	10.4	9.6	9.6	8.8	68
70		10.4	9.6	9.6	8.8	8.8	70
72			9.6	8.8	8.8	8.0	72
74					8.0	8.0	74
76						7.2	76
组合 Code	1110	1111	2111	2211	2221	2222	组合 Code
倍率	2	2	2	2	2	1	倍率
Parts of line							Parts of line






起重性能表
Lifting capacities

T 31.4~57.8m

         							
66m							
	31.4+7	36.7+7	42+7	47.3+7	52.6+7	57.8+7	
38	14.1						38
40	14.0	14.6					40
42	13.9	14.3	14.5				42
44	13.8	14.0	14.2				44
46	13.7	13.8	13.9	13.8			46
48	13.5	13.5	13.6	13.6	13.3		48
50	13.3	13.3	13.4	13.4	12.9		50
52	13.1	13.1	13.2	13.2	12.5	12.4	52
54	12.9	12.9	13.0	13.0	12.1	12.0	54
56	12.7	12.8	12.8	12.8	11.7	11.6	56
58	12.6	12.6	12.7	12.0	11.2	11.2	58
60	12.4	12.5	12.0	11.2	10.9	10.4	60
62	12.3	12.0	11.2	11.2	10.4	10.4	62
64	12.0	12.0	11.2	10.4	10.3	9.6	64
66	11.2	11.2	10.4	10.4	9.6	9.6	66
68	11.2	10.4	10.4	9.6	9.6	8.8	68
70	10.4	10.4	9.6	9.6	8.8	8.8	70
72	10.4	9.6	9.6	8.8	8.8	8.0	72
74	9.6	9.6	8.8	8.8	8.0	8.0	74
76		8.8	8.8	8.0	8.0	7.2	76
78			8.0	7.9	7.2	7.2	78
80					7.2	6.9	80
82						6.4	82
组合 Code 倍率	1110	1111	2111	2211	2221	2222	组合 Code 倍率
Parts of line	2	2	2	2	1	1	Parts of line



起重性能表
Lifting capacities

T 31.4~57.8m

        									
72m									
	31.4+7	36.7+7	42+7	47.3+7	52.6+7	57.8+7			
42	10.8							38	
44	10.6	10.3						40	
46	10.5	10.2	10.3					42	
48	10.3	10.1	10.2	10.1				44	
50	10.1	10.1	10.1	10.0	9.1			46	
52	10.0	10.0	10.0	9.9	8.8	7.6		48	
54	9.8	9.9	9.9	9.9	8.5	7.3		50	
56	9.7	9.7	9.8	9.8	8.2	7.0		52	
58	9.7	9.6	9.7	9.6	7.9	6.7		54	
60	9.4	9.4	9.5	9.4	7.6	6.5		56	
62	9.3	9.3	9.3	9.1	7.2	6.3		58	
64	9.2	9.2	9.1	8.4	7.1	6.1		60	
66	9.1	9.1	8.4	8.4	6.6	5.9		62	
68	9.0	9.1	8.4	7.7	6.6	5.7		64	
70	8.4	8.4	7.7	7.7	6.0	5.5		66	
72	8.4	8.4	7.7	7.0	6.0	5.3		68	
74	7.7	7.7	7.0	7.0	5.4	5.2		70	
76	7.7	7.7	7.0	6.8	5.4	5.0		72	
78	7.5	7.0	6.8	6.3	5.3	4.8		74	
80	7.0	6.9	6.3	6.1	4.8	4.7		76	
82		6.3	6.1	5.6	4.7	4.5		78	
84			5.6	5.5	4.4	4.2		80	
86					4.2	4.0		82	
88						3.6			
组合 Code 倍率 Parts of line	1110 2	1111 2	2111 2	2211 2	2221 1	2222 1		组合 Code 倍率 Parts of line	

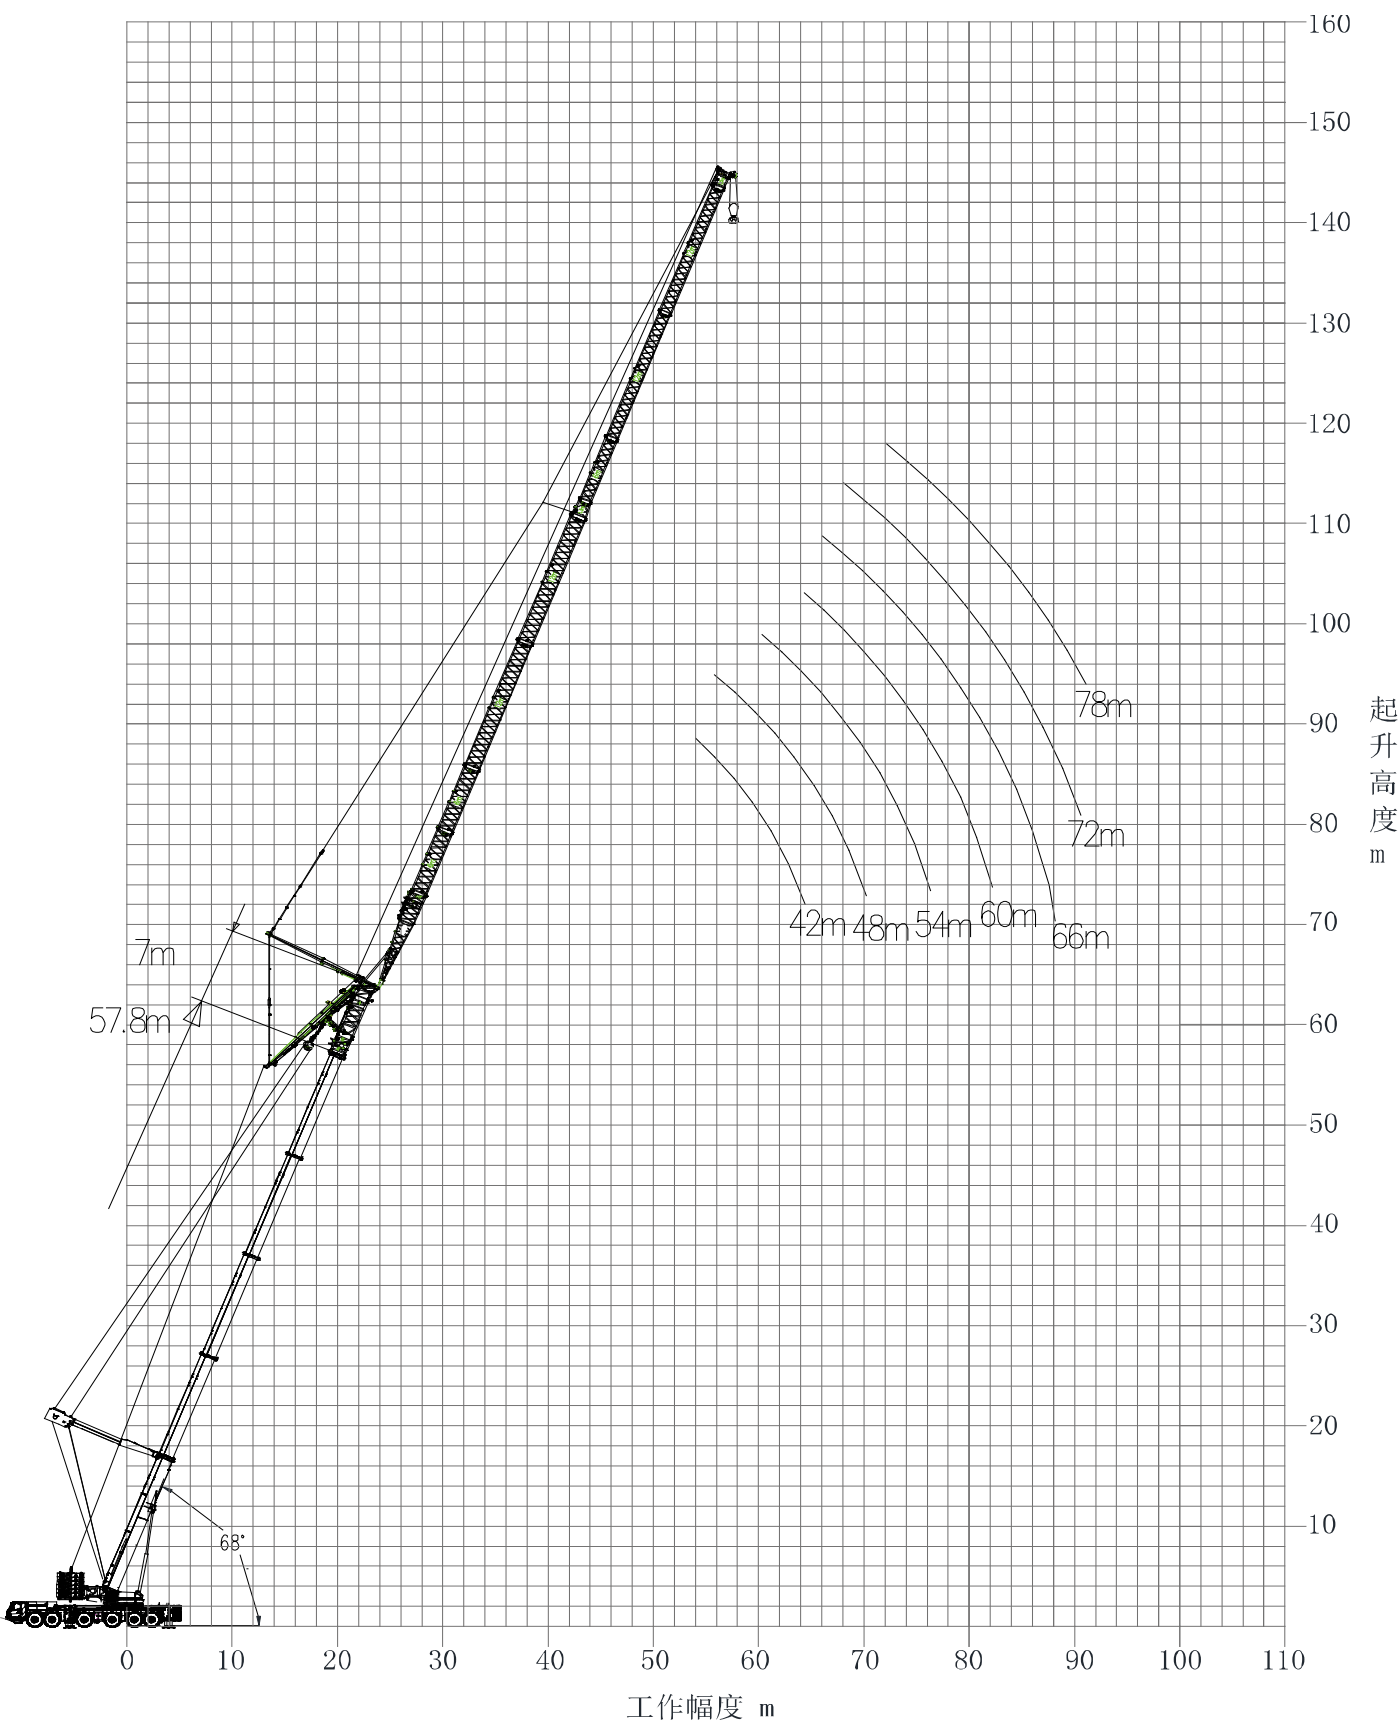
起重性能表
Lifting capacities

T 31.4~57.8m

          78m 31.4+7 36.7+7 42+7 47.3+7 52.6+7 57.8+7							
44	7.4						44
46	7.3	7.4					46
48	7.3	7.3	6.0				48
50	7.2	7.2	6.0	6.0			50
52	7.1	7.1	5.9	5.9	5.6		52
54	7.0	7.1	5.9	5.8	5.6		54
56	7.0	7.0	5.8	5.8	5.6	5.3	56
58	6.8	6.9	5.7	5.7	5.6	5.3	58
60	6.7	6.8	5.7	5.6	5.6	5.1	60
62	6.7	6.7	5.6	5.6	5.5	4.8	62
64	6.6	6.6	5.5	5.5	5.5	4.7	64
66	6.5	6.5	5.5	5.5	5.4	4.6	66
68	6.4	6.5	5.4	5.4	5.3	4.4	68
70	6.4	6.4	5.4	5.3	5.0	4.2	70
72	6.4	6.4	5.3	5.0	4.9	4.1	72
74	6.3	6.3	5.0	5.0	4.5	3.9	74
76	6.3	6.3	5.0	4.5	4.5	3.8	76
78	6.2	6.0	4.9	4.5	4.4	3.8	78
80	6.0	6.0	4.5	4.4	4.0	3.7	80
82	5.8	5.4	4.4	4.0	3.9	3.5	82
84	5.4	5.4	4.0	4.0	3.7	3.4	84
86	5.3	5.1	4.0	3.7	3.5	3.3	86
88		4.8	3.8	3.5	3.3	3.2	88
90				3.3	3.1	3.0	90
92					3.0	2.8	92
94						2.6	94
组合 Code 倍率 Parts of line	1110 1	1111 1	2111 1	2211 1	2221 1	2222 1	组合 Code 倍率 Parts of line






起升高度曲线图
Lifting height chart







主臂+超起+变幅副臂
Boom+ Super lifting device + Luffing jib



起重性能表
Lifting capacities


T 31.4~57.8m



 m  m							
 31.4-57.8 m T  7 m  42m  9.4×9.6m  360°  153 t  68°  SL							
42m							
	31.4+7	36.7+7	42+7	47.3+7	52.6+7	57.8+7	
38	23.2						38
40	22.4						40
42	21.6	20.8					42
44	20.8	20.0	19.2				44
46	20.0	19.2	18.4				46
48	19.2	18.4	17.6	16.0			48
50	18.4	17.6	16.8	16.0	15.2		50
52	17.4	16.8	16.0	15.2	14.4		52
54	16.5	16.0	15.2	14.4	13.6	13.0	54
56		15.2	14.4	13.6	13.6	12.8	56
58			14.4	13.6	12.8	12.0	58
60				12.8	12.0	12.0	60
62					12.0	11.2	62
64						11.2	64
组合 Code	1110	1111	2111	2211	2221	2222	组合 Code
倍率	2	2	2	2	2	1	倍率
Parts of line							Parts of line

 m  m							
 31.4-57.8 m T  7 m  48m  9.4×9.6m  360°  153 t  68°  SL							
48m							
	31.4+7	36.7+7	42+7	47.3+7	52.6+7	57.8+7	
42	18.4						42
44	17.6	16.8					44
46	16.8	16.0	15.2				46
48	16.0	15.2	14.4				48
50	15.2	14.4	13.6	12.8			50
52	14.4	13.6	12.8	12.0	11.2		52
54	13.6	13.6	12.0	11.2	10.4		54
56	12.8	12.8	12.0	11.2	10.4	9.6	56
58	12.8	12.0	11.2	10.4	9.6	9.6	58
60	12.0	11.2	10.4	9.6	9.6	8.8	60
62		11.2	10.4	9.6	8.8	8.0	62
64			9.6	8.8	8.7	8.0	64
66				8.8	8.0	7.7	66
68					7.7	7.2	68
70						6.8	70
组合 Code	1110	1111	2111	2211	2221	2222	组合 Code
倍率	2	2	2	1	1	1	倍率
Parts of line							Parts of line

起重性能表
Lifting capacities







T 31.4~57.8m






 m  31.4-57.8 m  7 m  54m  9.4×9.6m  360°  153 t  68°  SL  m							
54m							
	31.4+7	36.7+7	42+7	47.3+7	52.6+7	57.8+7	
44	17.6						44
46	16.8	16.0					46
48	16.0	15.2					48
50	15.2	14.4	13.6				50
52	14.4	13.6	12.8	12.0			52
54	13.6	12.8	12.0	11.2			54
56	12.8	12.8	12.0	11.2	10.4		56
58	12.8	12.0	11.2	10.4	9.6		58
60	12.0	11.2	10.4	9.6	9.6	8.8	60
62	11.2	11.2	10.4	9.6	8.8	8.0	62
64	11.2	10.4	9.6	8.8	8.7	8.0	64
66	10.4	10.4	9.6	8.8	8.0	7.7	66
68		9.6	8.8	8.0	7.8	7.2	68
70			8.6	7.9	7.2	6.9	70
72				7.2	7.0	6.4	72
74					6.4	6.1	74
76						5.6	76
组合 Code	1110	1111	2111	2211	2221	2222	组合 Code
倍率	2	2	1	1	1	1	倍率
Parts of line							Parts of line

 m  31.4-57.8 m  7 m  60m  9.4×9.6m  360°  153 t  68°  SL  m							
60m							
	31.4+7	36.7+7	42+7	47.3+7	52.6+7	57.8+7	
48	15.2						48
50	14.4	12.8					50
52	13.6	12.8	11.2				52
54	12.8	12.8	11.2				54
56	12.8	12.0	11.2	10.4			56
58	12.0	11.2	10.4	9.6			58
60	11.2	11.2	9.6	9.6	8.8		60
62	11.2	10.4	9.6	8.8	8.0		62
64	10.4	9.6	8.8	8.0	8.0	7.2	64
66	9.6	9.6	8.8	8.0	7.2	7.0	66
68	9.6	8.8	8.0	7.7	7.1	6.4	68
70	8.8	8.8	8.0	7.2	6.4	6.2	70
72	8.8	8.0	7.2	6.9	6.3	5.6	72
74		7.9	7.2	6.4	5.9	5.4	74
76			6.7	6.1	5.6	5.1	76
78				5.6	5.2	4.8	78
80					4.8	4.5	80
82						4.1	82
组合 Code	1110	1111	2111	2211	2221	2222	组合 Code
倍率	2	1	1	1	1	1	倍率
Parts of line							Parts of line

起重性能表
Lifting capacities






T 31.4~57.8m

        							
66m							
	31.4+7	36.7+7	42+7	47.3+7	52.6+7	57.8+7	
50	14.1						50
52	13.5	12.0					52
54	12.8	12.0					54
56	12.0	12.0	11.2				56
58	12.0	11.2	10.4	9.6			58
60	11.2	10.4	9.6	8.8			60
62	10.4	10.4	9.6	8.8	8.0		62
64	10.4	9.6	8.8	8.0	8.0		64
66	9.6	9.6	8.8	8.0	7.2	7.0	66
68	9.6	8.8	8.0	7.8	7.1	6.4	68
70	8.8	8.8	8.0	7.2	6.4	6.2	70
72	8.8	8.0	7.2	6.9	6.3	5.6	72
74	8.0	8.0	7.2	6.4	6.0	5.5	74
76	8.0	7.2	6.8	6.2	5.6	5.1	76
78	7.6	7.2	6.4	5.8	5.3	4.8	78
80		6.8	6.1	5.5	5.0	4.5	80
82			5.6	5.2	4.7	4.2	82
84				4.8	4.4	4.0	84
86					4.1	3.7	86
88						3.4	88
组合 Code	1110	1111	2111	2211	2221	2222	组合 Code
倍率	2	1	1	1	1	1	倍率
Parts of line							Parts of line

        							
72m							
	31.4+7	36.7+7	42+7	47.3+7	52.6+7	57.8+7	
54	9.9						54
56	9.8	9.1					56
58	9.8	9.1	9.1				58
60	9.1	9.1	8.4				60
62	9.1	8.4	7.7	7.0			62
64	8.4	7.7	7.0	7.0	5.4		64
66	8.4	7.7	7.0	6.3	4.8		66
68	7.7	7.0	6.3	6.2	4.8	4.2	68
70	7.6	7.0	6.3	5.6	4.5	4.1	70
72	7.0	6.8	6.1	5.4	4.2	3.8	72
74	6.8	6.3	5.6	4.9	3.9	3.5	74
76	6.3	6.1	5.4	4.8	3.6	3.3	76
78	6.1	5.6	4.9	4.5	3.4	3.0	78
80	5.6	5.4	4.8	4.2	3.2	2.9	80
82	5.5	5.1	4.5	4.0	3.0	2.6	82
84	5.2	4.8	4.2	3.7	2.8	2.4	84
86		4.5	4.0	3.5	2.6	2.3	86
88			3.7	3.2	2.4	2.1	88
90				3.0	2.2		90
92					2.0		92
组合 Code	1110	1111	2111	2211	2221	2222	组合 Code
倍率	1	1	1	1	1	1	倍率
Parts of line							Parts of line

起重性能表
Lifting capacities

T 31.4~57.8m

         							
78m							
	31.4+7	36.7+7	42+7	47.3+7	52.6+7	57.8+7	
56	7.0						56
58	6.9	7.2					58
60	6.9	7.0					60
62	6.8	6.8	5.0				62
64	6.7	6.6	5.0	4.6			64
66	6.6	6.6	5.0	4.5			66
68	6.6	6.0	4.5	4.4	4.0		68
70	6.5	6.0	4.5	4.0	3.7		70
72	6.0	5.4	4.3	3.9	3.5	3.2	72
74	5.9	5.4	4.0	3.5	3.3	3.0	74
76	5.4	5.2	3.9	3.4	3.0	2.8	76
78	5.3	4.8	3.5	3.2	2.9	2.6	78
80	4.8	4.7	3.4	3.0	2.7	2.4	80
82	4.7	4.4	3.2	2.8	2.5	2.2	82
84	4.5	4.2	3.0	2.7	2.3	2.1	84
86	4.2	3.9	2.9	2.5	2.2		86
88	4.0	3.7	2.7	2.3	2.0		88
90	3.8	3.5	2.5	2.2			90
92		3.3	2.4	2.0			92
94			2.2				94
组合 Code 倍率 Parts of line	1110 1	1111 1	2111 1	2211 1	2221 1	2222 1	组合 Code 倍率 Parts of line

主要技术参数表

Table of main technical data

类别 Category	项目 Item		单位 Unit	参数 Parameter
尺寸参数 Dimensions	外形尺寸 (长×宽×高) Dimensions(length×width×height)		mm	16835×3000×4000(72t)
	轴距 Wheel base		mm	1650+3050+2665+2100+1650
	轮距 (前/后) Track (Front/ Rear)		mm	2530/2530/2530/2530/2530/2530
	前悬/后悬 Front/ Rear overhang		mm	2689/1086
	前伸/后伸 Front/ Rear extension		mm	1295/650
重量参数 Weight	最大允许总质量 Max. permissible weight		kg	72000
	轴荷 Axle load	一轴 1st axle	kg	12000
		二轴 2nd axle	kg	12000
		三轴 3rd axle	kg	12000
		四轴 4th axle	kg	12000
		五轴 5th axle	kg	12000
		六轴 6th axle	kg	12000
动力参数 Power	发动机型号 Engine model		——	WP15H660E61
	额定功率/转速 Rated power/rpm		kW/(r/min)	485/1800
	最大输出扭矩/转速 Max. output torque/rpm		N.m/(r/min)	3200/(900-1400)
行驶参数 Travel	最高车速 Max. travel speed		km/h	80
	最低稳定车速 Min. stable travel speed		km/h	2
	最小转弯直径 Min. turning diameter		m	23.3
	臂头最小转弯直径 Min. turning diameter at boom tip		m	27.6
	最小离地间隙 Min. ground clearance		mm	330
	接近角 Approach angle		°	16
	离去角 Departure angle		°	30
	制动距离 (制动初速度为30km/h) Braking distance (at 30 km/h)		m	≤10
	最大爬坡能力 Max. grade ability		%	52
	百公里油耗 Fuel consumption per 100 km		L	105
噪音 Noise	加速行驶机外噪声 Exterior noise level during acceleration		dB(A)	≤84
	驾驶员耳旁噪声 Noise level at seated position		dB(A)	≤90

主要技术参数表
Table of main technical data



类别 Category	项目 Item			单位 Unit	参数 Parameter
主要性能参数 Main performance	最大额定总起重量 Max. rated lifting capacity			t	500
	最小额定工作幅度 Min. rated working radius			m	3
	转台尾部回转半径 Turning radius at turntable tail			mm	6900
	最大起重力矩 Max. load moment	基本臂 Base boom		kN.m	13883
		最长主臂 Fully-extended boom		kN.m	10579
	支腿跨距 Outrigger span	纵向 Longitudinal		m	9.4
		横向 Lateral		m	9.6
	起升高度 Lifting height	基本臂 Base boom		m	17
		最长主臂 Fully-extended boom		m	84
		最长主臂+副臂 Fully-extended boom + Jib		m	125
		最长主臂+变幅副臂 Fully-extended boom + Luffing Jib		m	137
	起重臂长度 Boom length	基本臂 Base boom		m	16.1
		最长主臂 Fully-extended boom		m	85
		最长主臂+副臂 Fully-extended boom + Jib		m	128
		最长主臂+变幅副臂 Fully-extended boom + Luffing Jib		m	142.8
	副臂安装角 Jib offset angle			°	0、20、40、60
工作速度参数 Working speed	起重臂起臂时间 Time for boom raising			s	≤100
	起重臂全伸时间 Time for boom extending fully			s	≤1300
	最大回转速度 Max. slewing speed			r/min	≥1.2
	支腿收放时间Time for outrigger extending and retracting	水平支腿（单侧） Outrigger beam (single side)	收 Retracting	s	≤30
			放 Extending	s	≤40
		垂直支腿 Outrigger jack	收 Retracting	s	≤85
			放 Extending	s	≤85
	起升速度（单绳,第四层,空载） Hoisting speed (single line, 4th layer, no load)	主起升机构 Main winch		m/min	≥120
		变幅副臂变幅卷扬 Luffing winch of luffing jib		m/min	≥40
噪声 Noise	机外辐射 Exterior noise level			dB（A）	≤111
	司机位置处 Noise level at seated position			dB（A）	≤85

符号标识

Description of symbols

常规标识

General symbols

	吊臂长度 Boom length		车桥 Axle
	工作幅度 Radius		行驶速度 Travel speed
	吊臂仰角 Boom angle		爬坡能力 Grade ability
	固定副臂长度 Fixed jib length		轮胎 Tire
	副臂安装角 Jib offset angle		平衡重 Counterweight
	超起 Super lifting device		上车 Superstructure
	变幅副臂 Luffing jib		底盘 Chassis
	风电臂 Wind power jib		360°全回转 360° operation of the boom
	支腿 Outrigger		卷扬 Winch
	吊钩 Hook block		

注意事项

Notes

- 1. 表中额定总起重量值，是在平整的坚固地面上本起重机能够保证的最大总起重量，包括吊钩和吊具的重量，所以为了估算重物重量，必须减去上述的装置重量。
- 2. 表中的工作幅度为起吊重物离地时起重物到起重机回转轴线的水平距离，是包括起重臂变形量在内的实际值，因而起吊前应考虑起重臂变形量。
- 3. 只允许在5级(瞬时风速14.1m/s，风压125N/m²)风以下进行作业。
- 4. 吊重前操作者必须对物体的重量和工作范围了解后选择合适的作业工况，严禁超出表中的数值。幅度及臂长在相邻两个数值之间时，应依据两个数值中较小值确定起重作业。
- 5. 应按主臂仰角范围作业，即使是空载，也不应使主臂仰角处于范围外，谨防整机倾翻。
- 6. 表中的主臂长度应要按照每节臂的伸缩要求进行伸出。

- 1. The total rated load given in the rated lifting load table are the maximum lifting capacity when the crane is set up on firm and level ground. The total rated load includes the weight of the hook block and slings. The weight of above-mentioned devices should be deducted from the rated lifting load.
- 2. The working radius shown in the rated lifting load table is the horizontal distance between the gravity center of the load and the rotational axis of the crane when the load is lifted off ground, and it is the actual value including loaded boom deflection. Take boom deflection into consideration before beginning a lifting operation.
- 3. A lifting operation is permissible only when the wind force is below grade 5 (instantaneous wind speed is 14.1 m/s, wind pressure is 125 N/m²).
- 4. Before beginning lifting operation, the operator should know the weight of the load to be lifted and its working range, and then select proper working conditions. Never operate the crane beyond the limit shown in the chart. Use the lower value from the chart when the boom length or working radius is between the range of values.
- 5. Observe the boom angle limit. Never operate the crane with the boom angle beyond the recommended limit even if no load is being carried. Otherwise, the crane will tip.
- 6. The boom should be extended according to the telescoping code shown by digits.



本印刷品不属于合同。出于产品不断改进的需要，我们保留对产品型号、参数、配置进行变更的权利，恕不另行通知。图片仅供参考，具体产品以实物为准。图片中产品可能并非标准配置，部分部件可能需要另行购置。办理牌照和上路行驶需遵守当地法规。

This print is not part of the contract. We reserve the right to modify the design (such as product model, parameters and configuration) without notice for improvement. The pictures are just for reference. The product in the picture may not be standard configuration. Some parts need to be purchased separately. Conform to the local laws for license application and road traveling.